



om  
3 29

FIXED  
LING

IMAGINE DRAGONS  
HOLY TOUR 2017

RECYCLE  
RECYCLE

SOLAR STAMPS  
e3  
412


<https://shorturl.at/ovG27>

We will also post the entire video clips on Panopto




# Laser Cutting


Huaishu Peng | UMD CS | CMSC 730

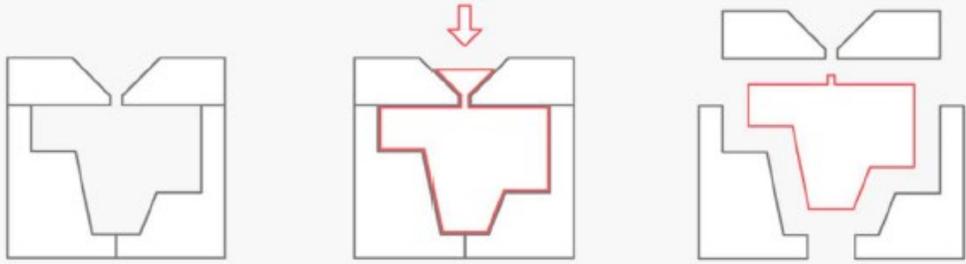

**Formative** manufacturing

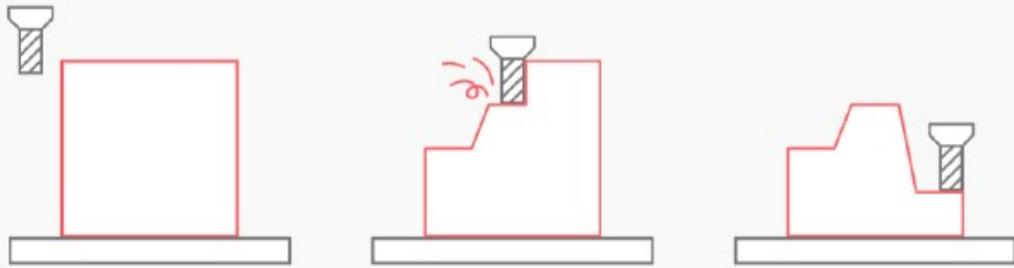


**Subtractive** manufacturing

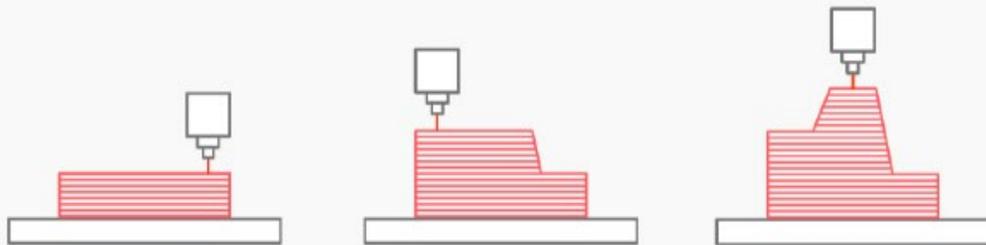

**Additive** manufacturing



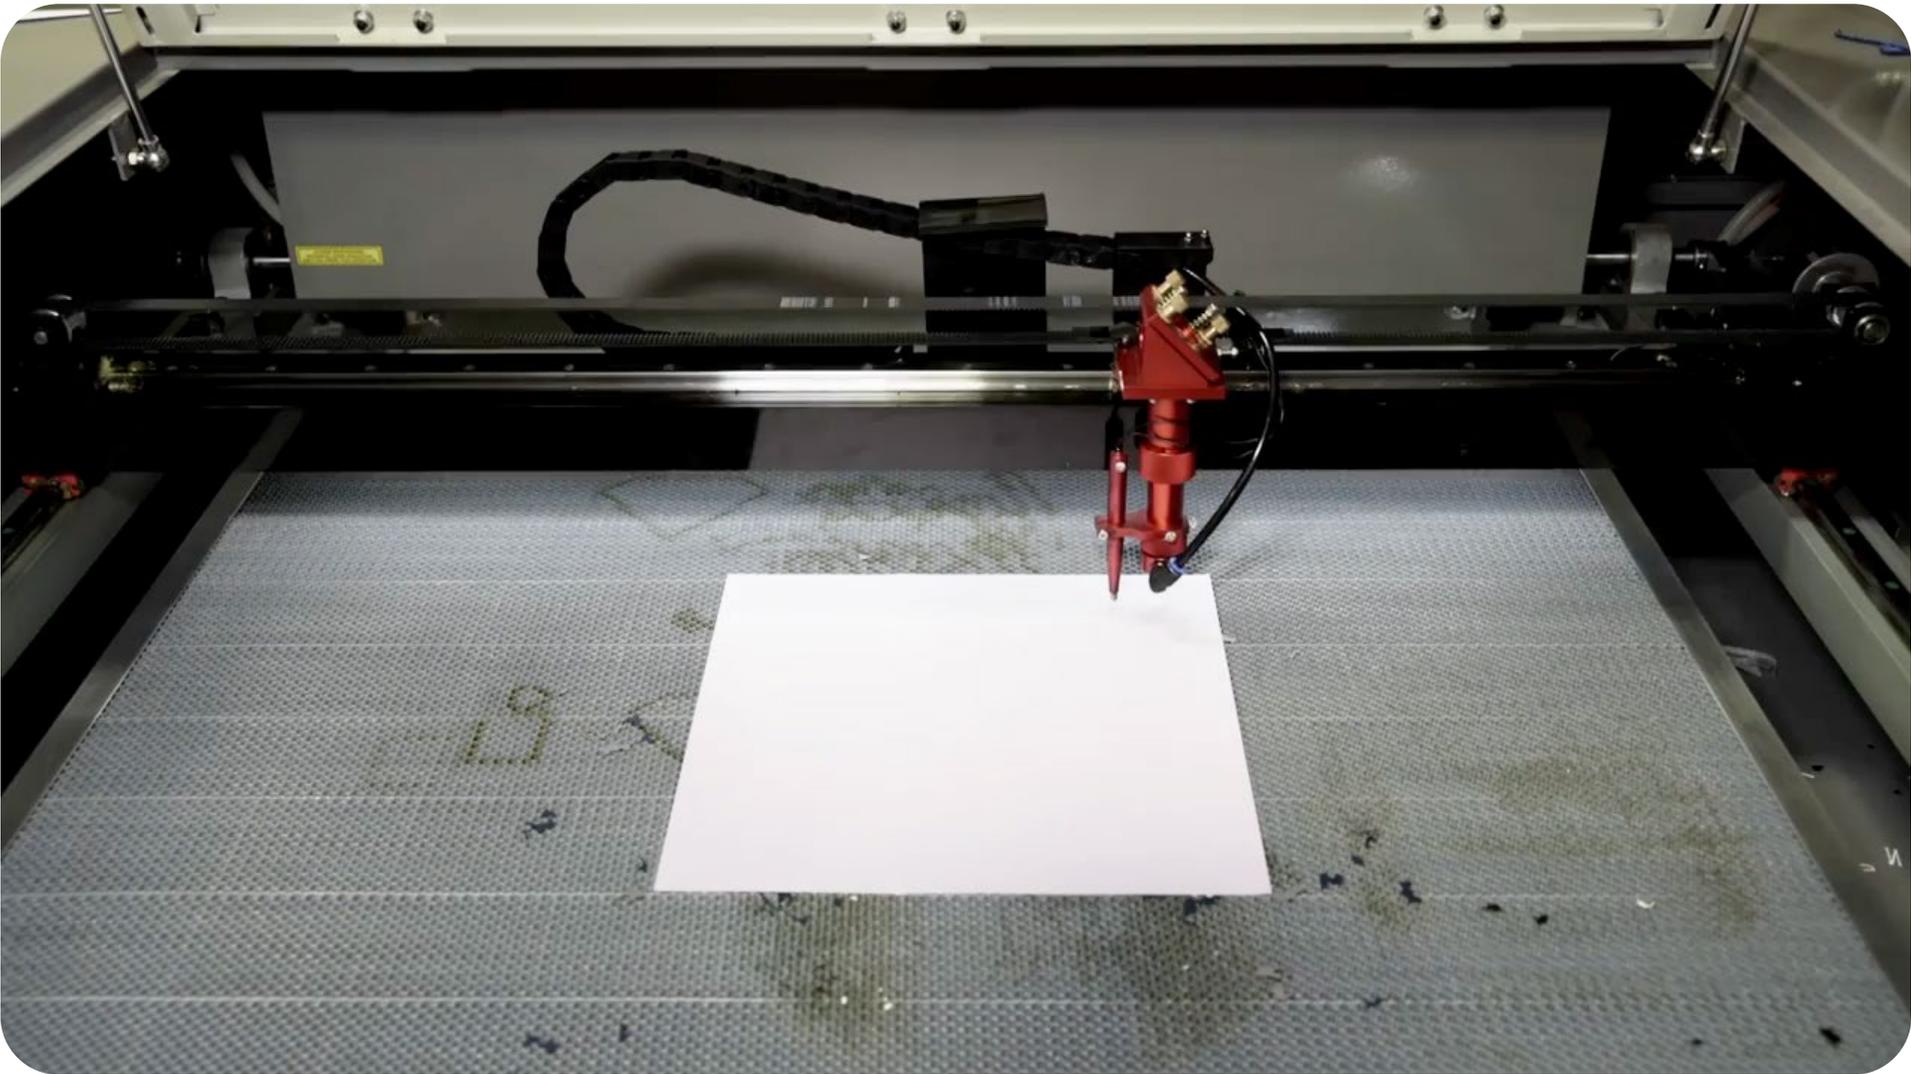


We already talked about 3D printing, why laser cutting?

**Fast** (Good for iteration)

**Durable** (because there is no layer bonding)

**Simple** (Similar to 2D paper printing)


**How does a CO2 laser cutter work**  
**What we can do with it**

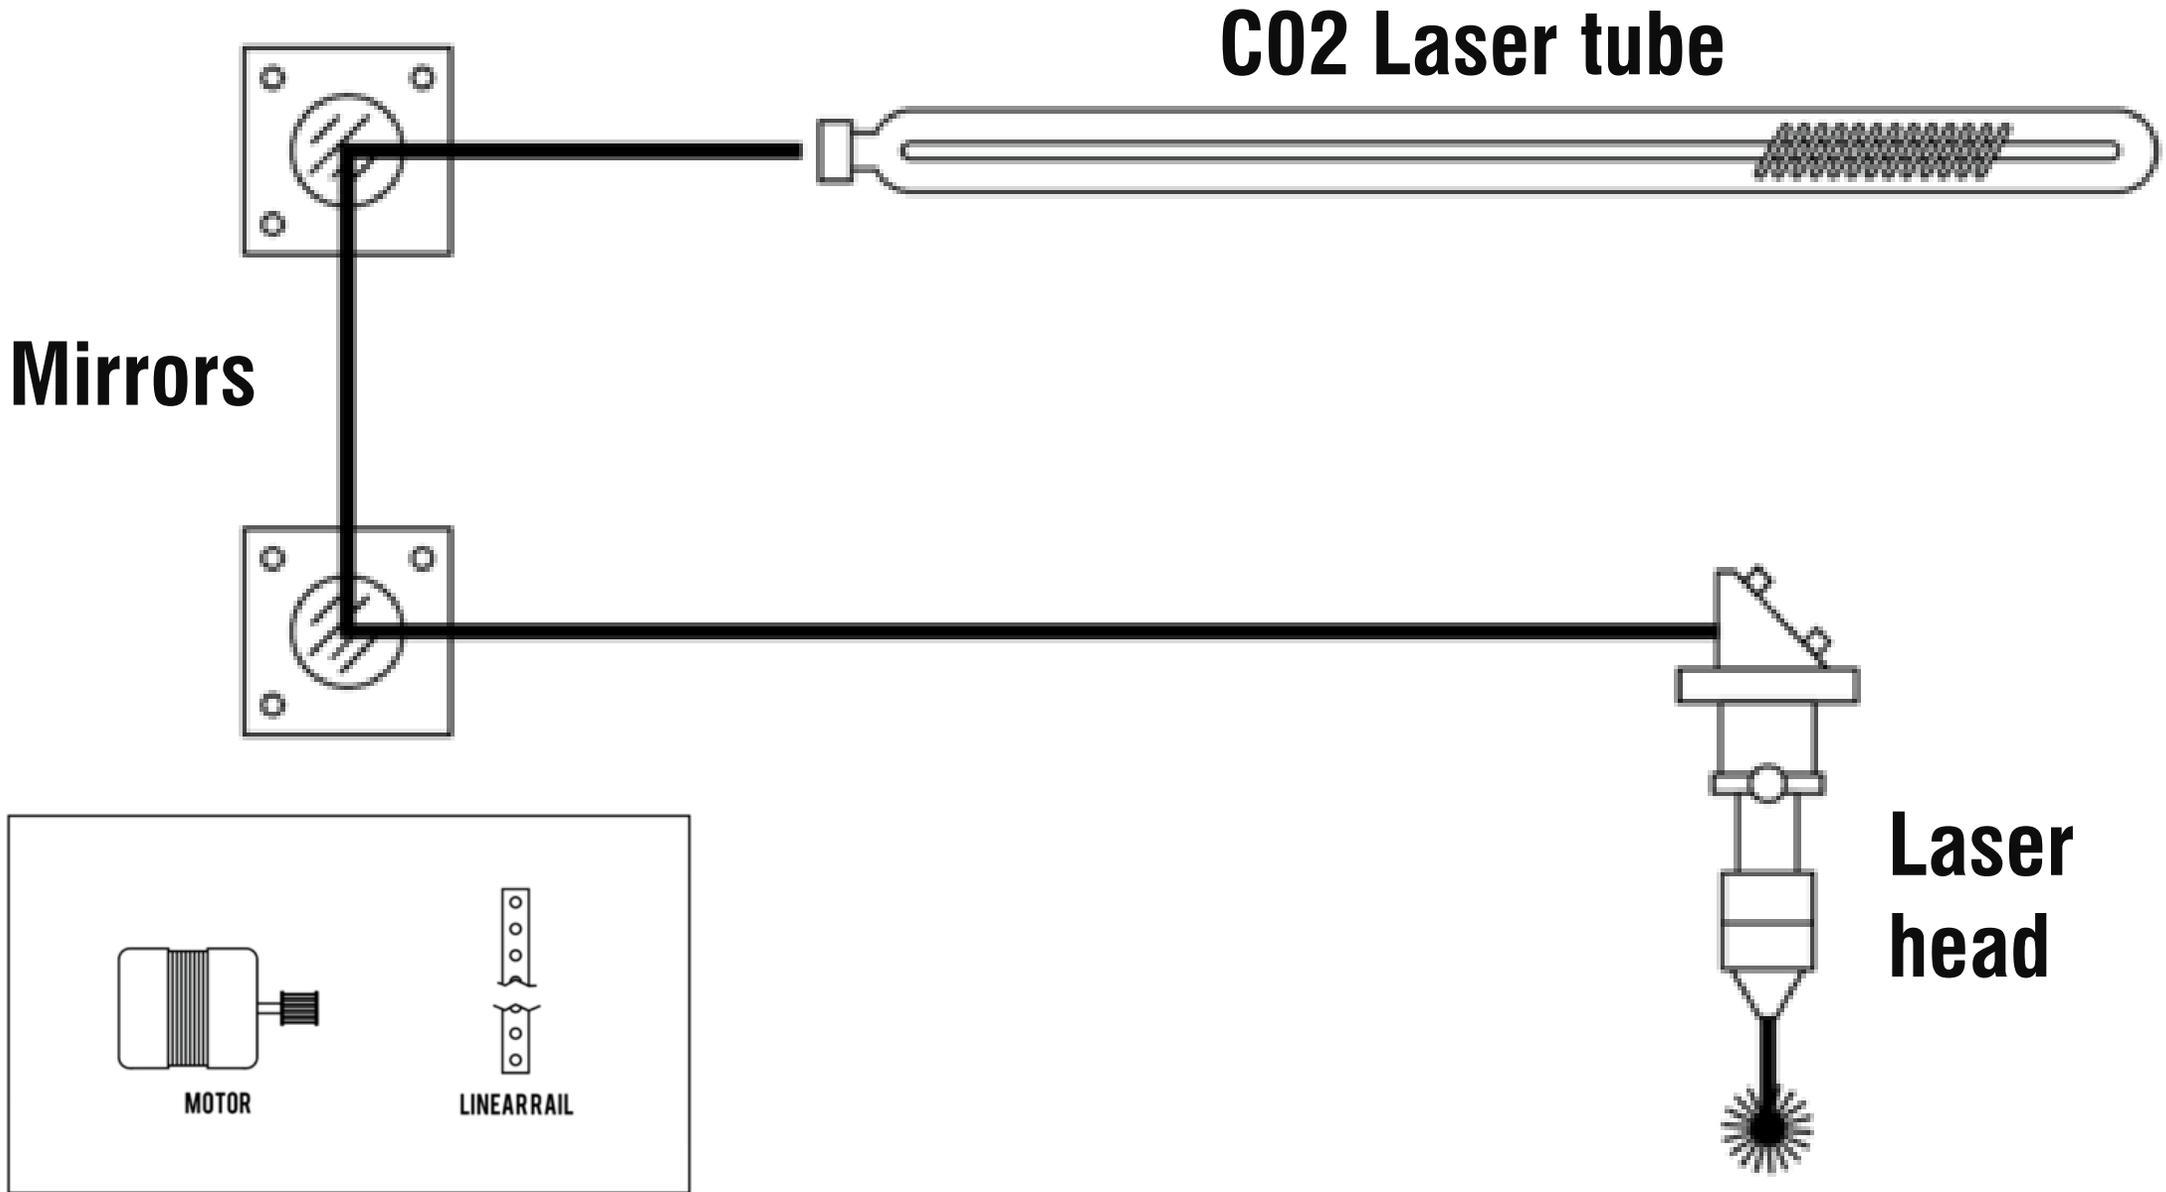


**CO2 Laser tube**

**Mirrors**


**Laser head**



**MOTOR**



**LINEARRAIL**

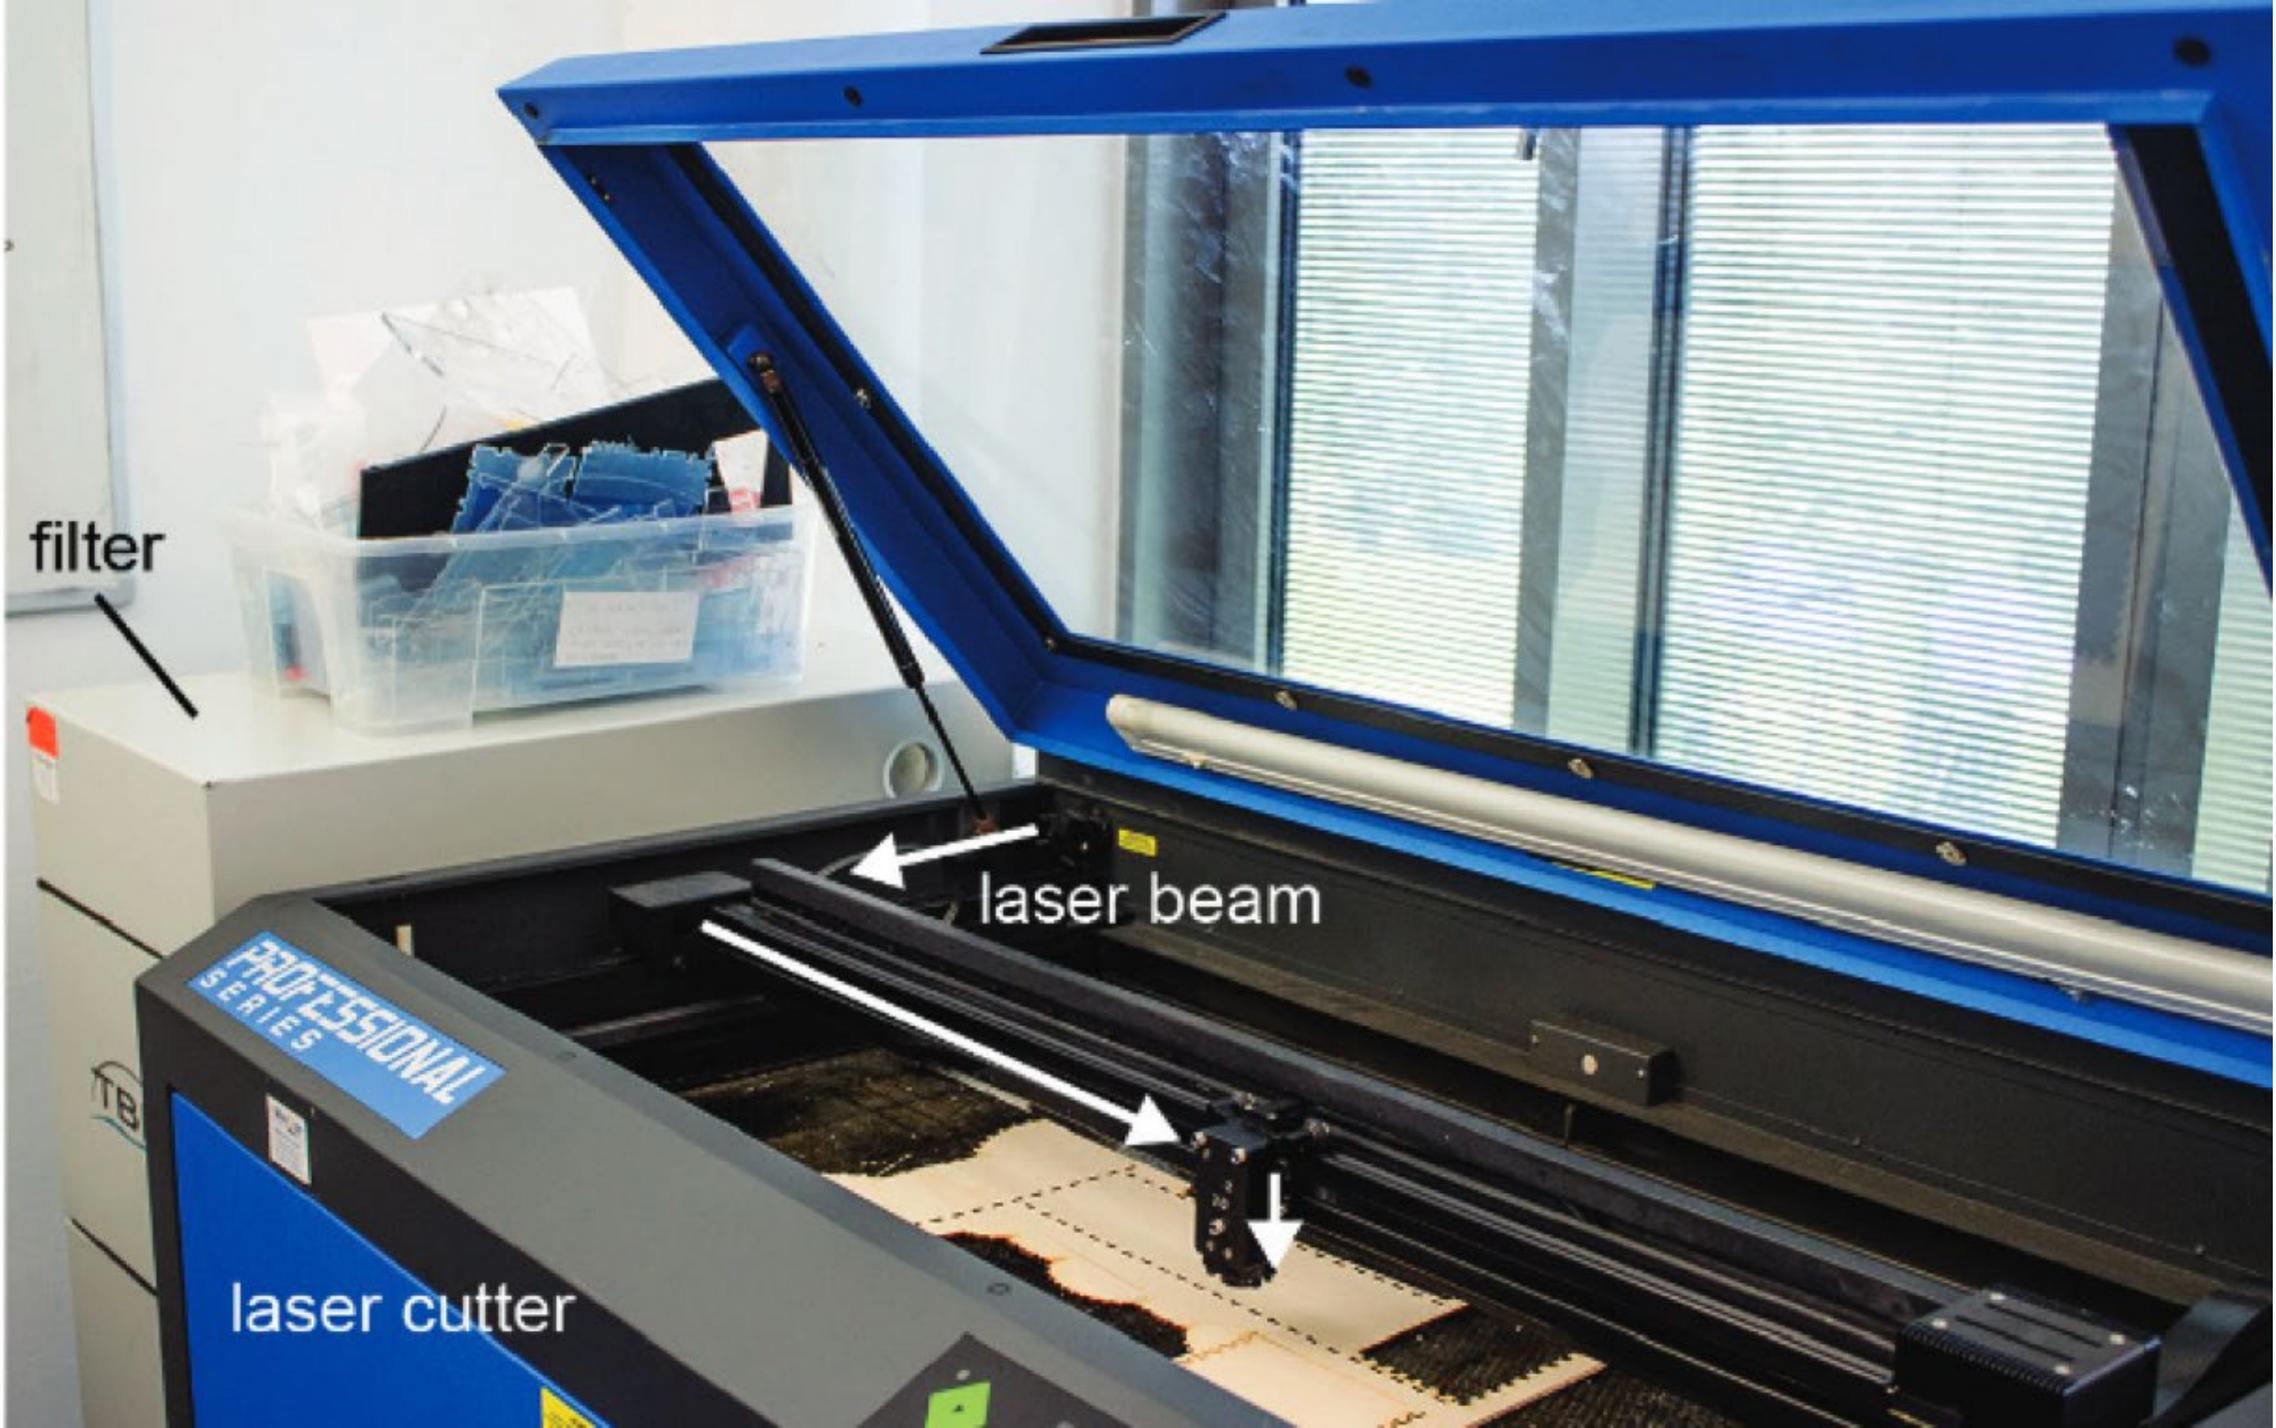



filter

laser beam



laser cutter

PROFESSIONAL  
SERIES

TB

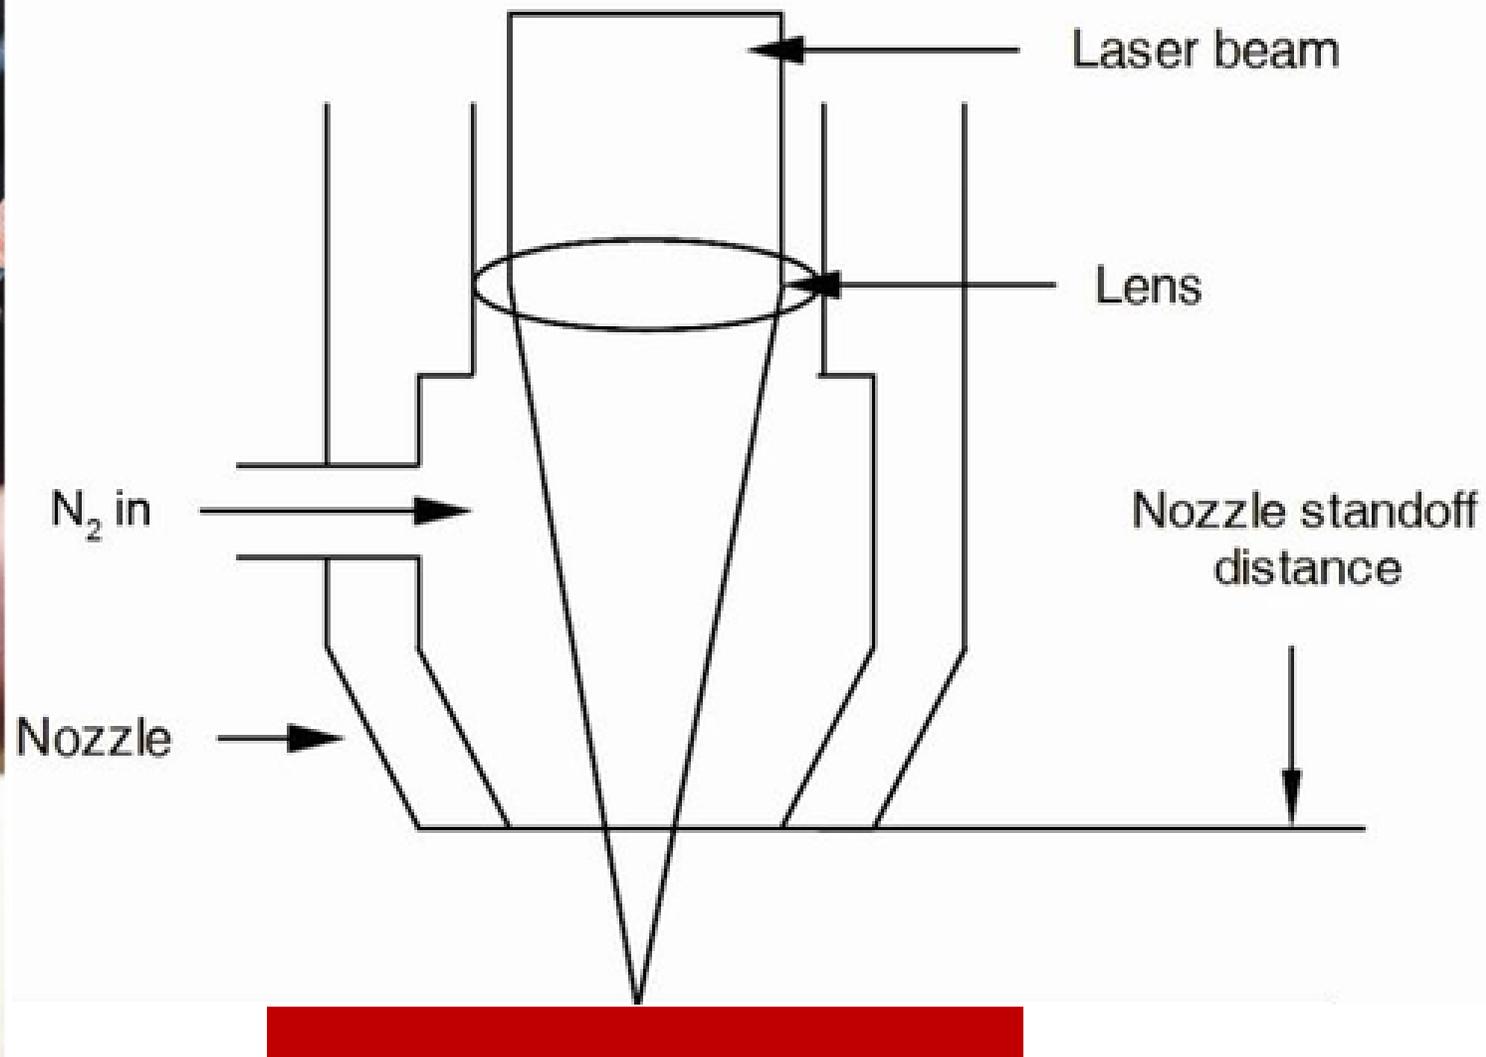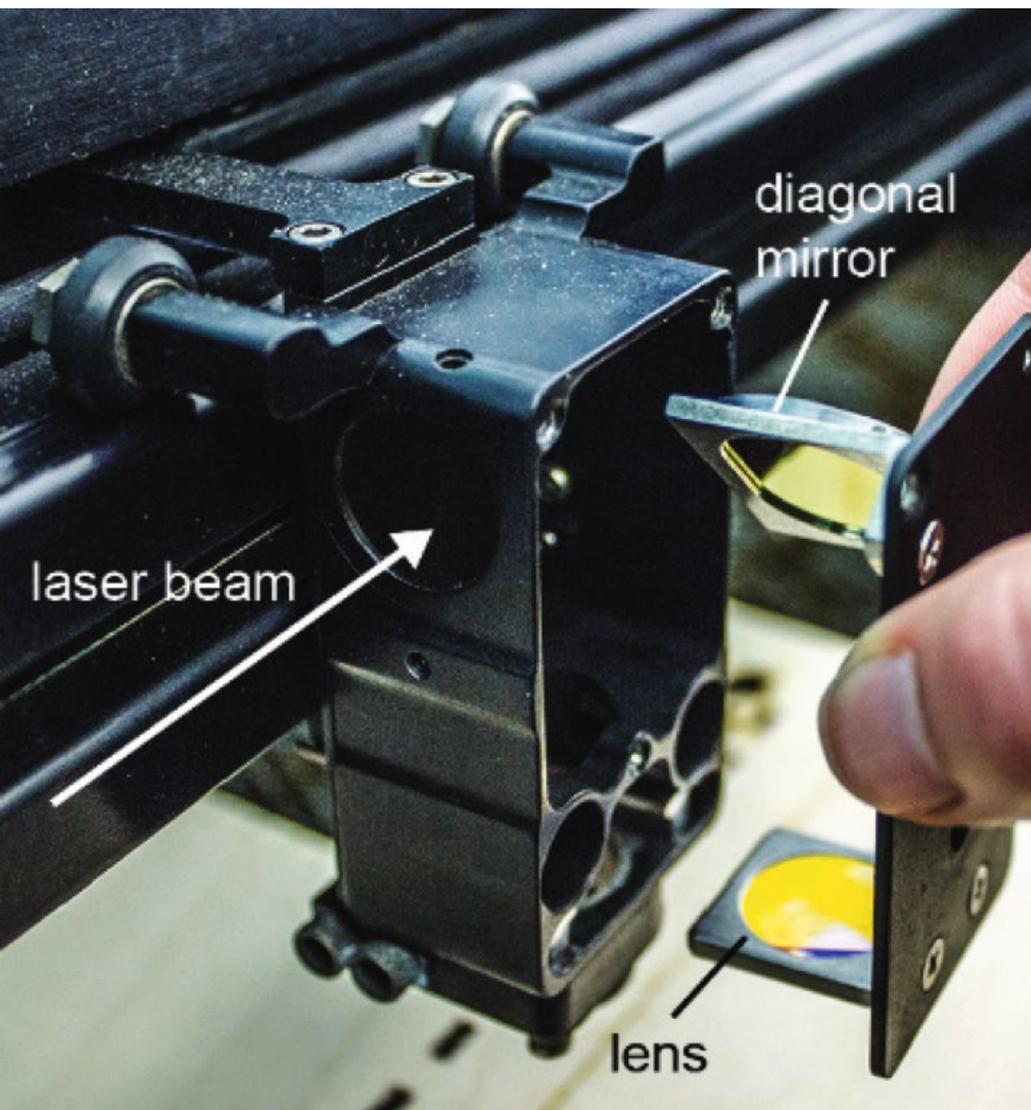

**distance** of sheet to lens is important  
(focal length of lens)

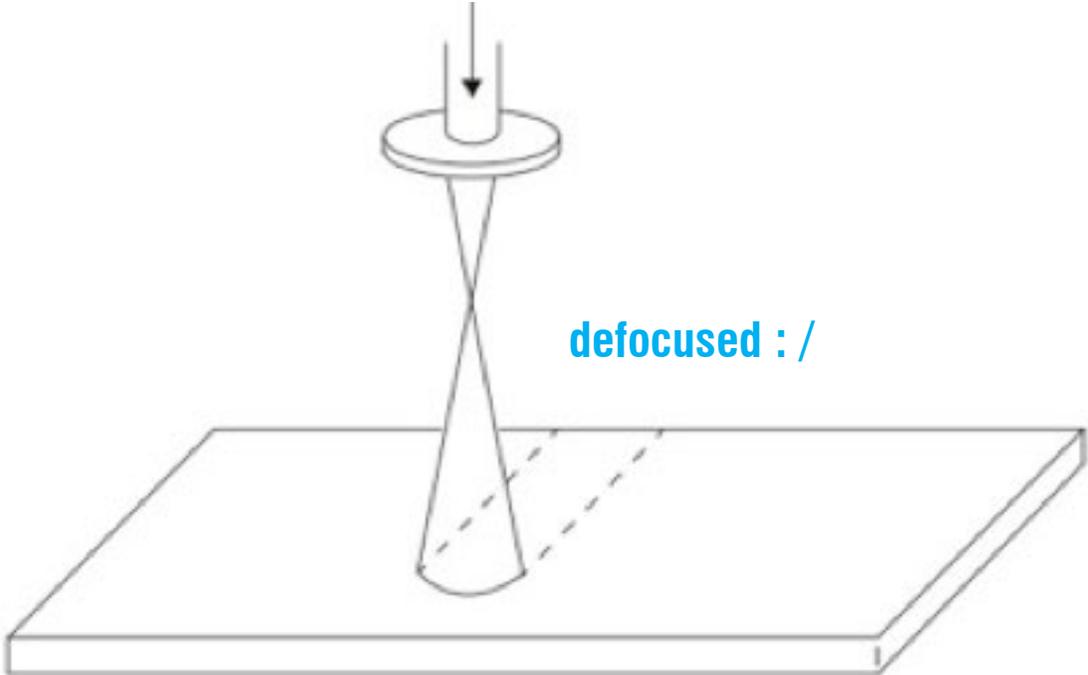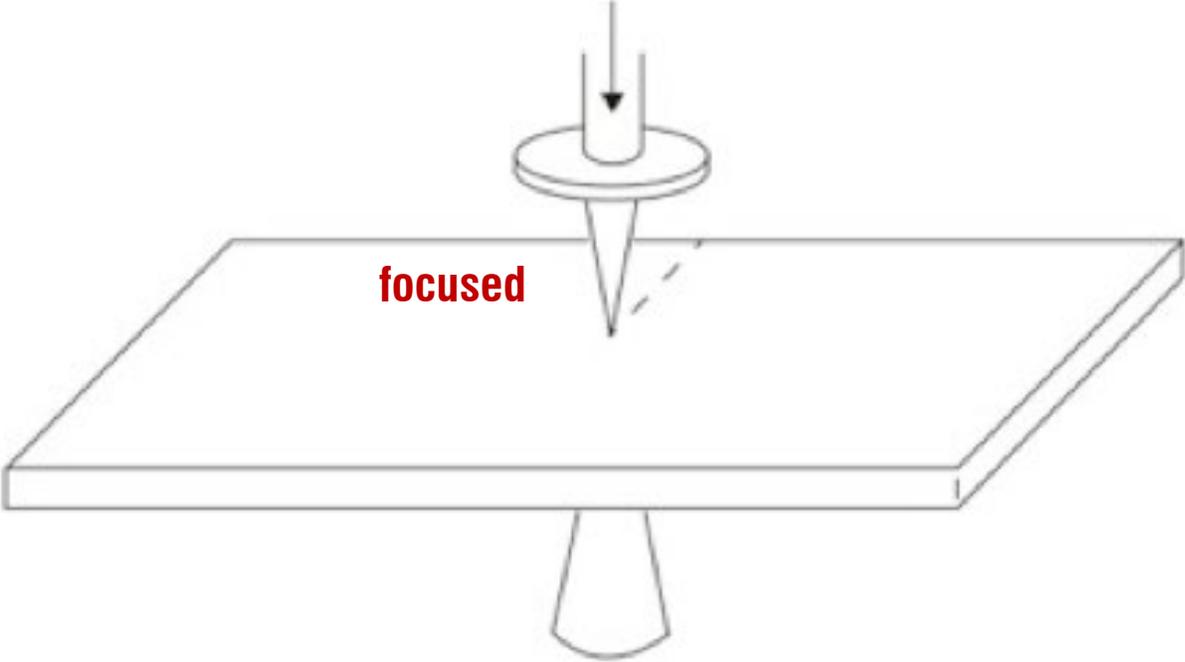

too little power for cutting

**how can I laser cut something?**

laser features #1

# Raster engraving





**Engraving takes about half an hour at this size**

## Raster engraving

This process is the same as used by inkjet printers. A file is printed **line by line**.

Instead of ink being applied, material is **removed** pixel by pixel by the laser



# When to use raster engraving?

Want to leave “**trace**” on the material,  
but doesn't want to “**cut through**”

## Pros/Cons?


Detailed engraving images

Slow in speed

laser features #2

# Vector engraving/cutting



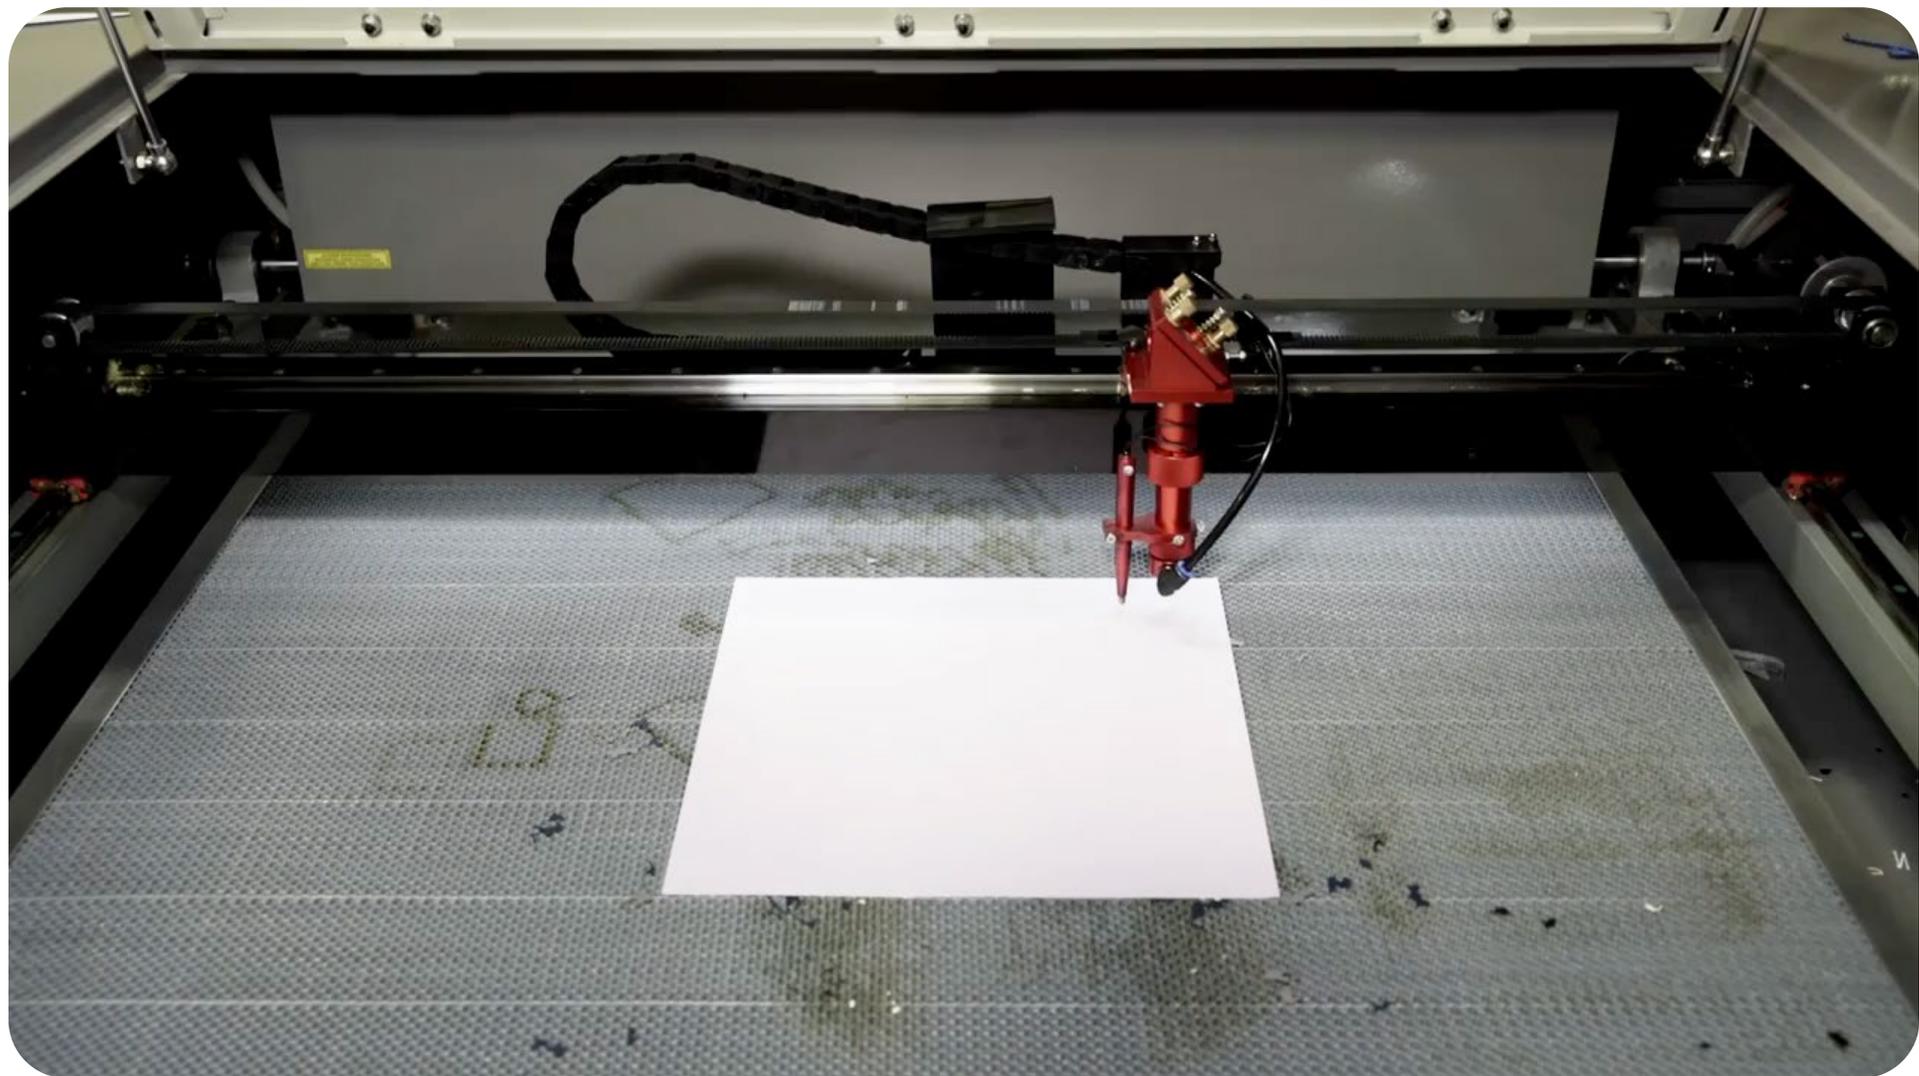


## Vector engraving/cutting

The file to be printed is a graphic file consisting of **vectors**, marked as hairlines in the graphics.

**Vector by vector is traced by the laser** and then engraved.

In vector engraving, the axles move simultaneously, and more slowly than in raster engraving.

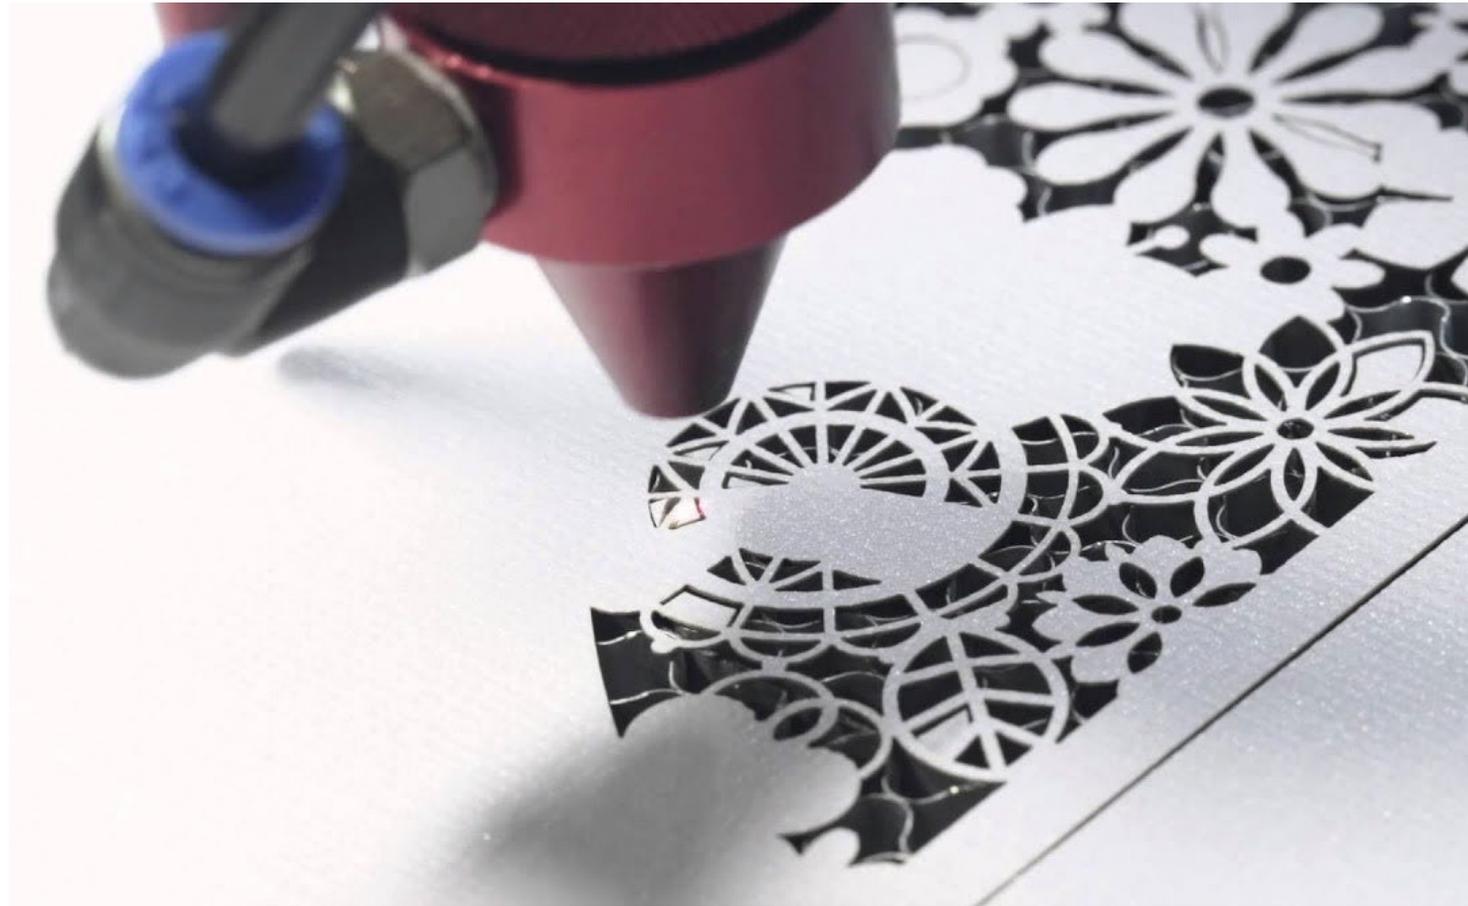

**We can also score lines without cut-through. (folding lines)**

We will assign different lines with different power and speed

**relationship  
between power and speed?**

Viewer System Diagnostics

Materials Database Manual Control

75W CO2 [10.6μ] Laser Settings for PLS6.75

Color	Mode	Power	Speed	PPI	Z-Axis
Black	Rast	26.0%	100%	500	0.230"
Red	Vect	100%	1.9%	1000	0.230"
Green	Vect	100%	1.9%	1000	0.230"
Yellow	Vect	100%	1.9%	1000	0.230"
Blue	Vect	5.4%	12%	500	0.230"
Magenta	Vect	100%	1.9%	1000	0.230"
Cyan	Rast/Vect	50.0%	100%	500	0.230"
Orange	Rast/Vect	50.0%	100%	500	0.230"

Power Speed PPI Z-Axis

Mode:  
Z-Axis:

Raster Vector Engraving Field

Print Direction Dithering

Normal

Set

if we increase speed, do we get more of less power?

The screenshot shows a software interface for a 75W CO2 laser. At the top, there are tabs for 'Viewer', 'System', and 'Diagnostics'. Below these are 'Materials Database' and 'Manual Control' tabs. The main area is titled '75W CO2 [10.6µ] Laser Settings for PLS6.75'. It features a table with laser settings for various colors and modes, and four vertical sliders for Power, Speed, PPI, and Z-Axis. A 'Mode:' dropdown and a 'Z-Axis:' input field are also present. At the bottom, there are sections for 'Raster', 'Vector', and 'Engraving Field', with a 'Print Direction' dropdown and a 'Dithering' radio button set to 'Halftone'. A large 'Set' button is located in the bottom right corner.

Color	Mode	Power	Speed	PPI	Z-Axis
Black	Rast	26.0%	100%	500	0.230"
Red	Vect	100%	1.9%	1000	0.230"
Green	Vect	100%	1.9%	1000	0.230"
Yellow	Vect	100%	1.9%	1000	0.230"
Blue	Vect	5.4%	12%	500	0.230"
Magenta	Vect	100%	1.9%	1000	0.230"
Cyan	Rast/Vect	50.0%	100%	500	0.230"
Orange	Rast/Vect	50.0%	100%	500	0.230"

if we **go faster**  
the laser spends less time on a single spot  
-> **less power**

75W CO2 (10.6μ) Laser Settings for PLS6.75

Color	Mode	Power	Speed	PPI	Z-Axis
Black	Rast	26.0%	100%	500	0.230"
Red	Vect	100%	1.9%	1000	0.230"
Green	Vect	100%	1.9%	1000	0.230"
Yellow	Vect	100%	1.9%	1000	0.230"
Blue	Vect	5.4%	12%	500	0.230"
Magenta	Vect	100%	1.9%	1000	0.230"
Cyan	Rast/Vect	50.0%	100%	500	0.230"
Orange	Rast/Vect	50.0%	100%	500	0.230"

Power Speed PPI Z-Axis

Mode:  
Z-Axis:

Raster Vector Engraving Field

Print Direction Dithering

Normal  Halftone

# Epilog Engraver WinX64 Zing Properties



General    Advanced    **Color Mapping**

Color Mapping

Color Mapping

R: 255  
G: 0  
B: 0

Speed: 14  
Power: 82  
Freq.: 1925  
Focus: 0

Raster  
 Vector



Color	Speed	Power	Freq.	Focus	Raster	Vector
	14%	82%	1925	0	Yes	Yes
	61%	19%	1054	0	Yes	Yes
	71%	74%	3549	0	Yes	Yes
	14%	100%	2500	0	Yes	Yes
	50%	50%	2500	0	Yes	Yes
	50%	50%	2500	0	Yes	Yes

OK    Cancel

What materials can we cut?



## most common materials

Paper  
Cardboard  
Acrylic  
Solid wood  
MDF  
Leather



what **other** materials can we laser cut?

## unconventional materials

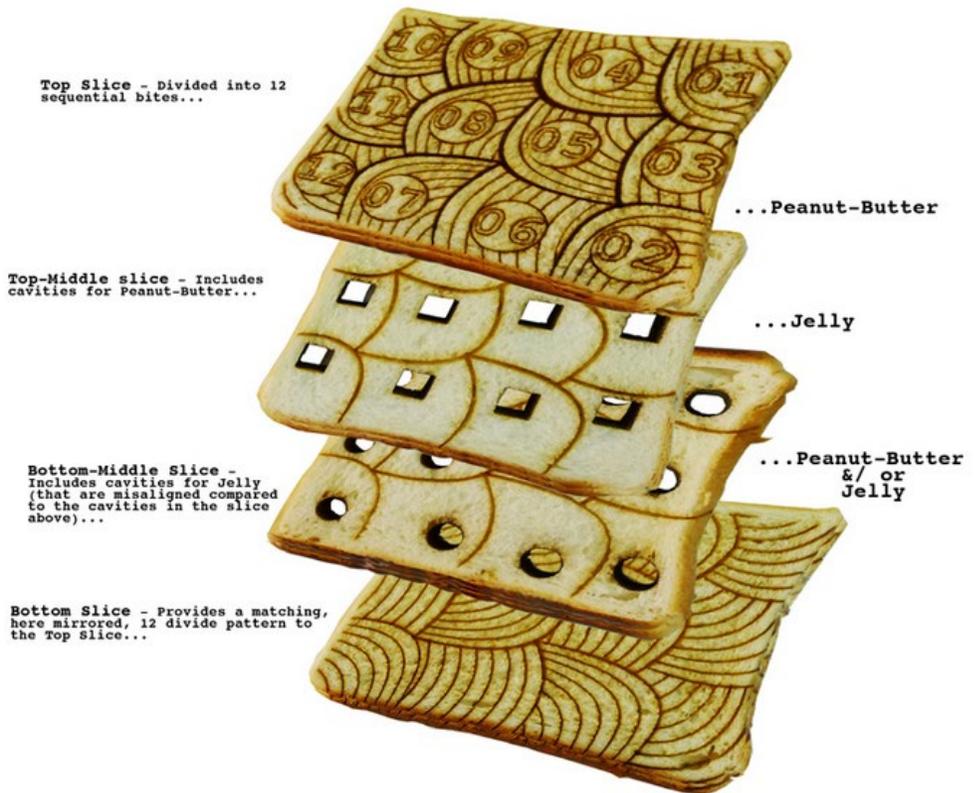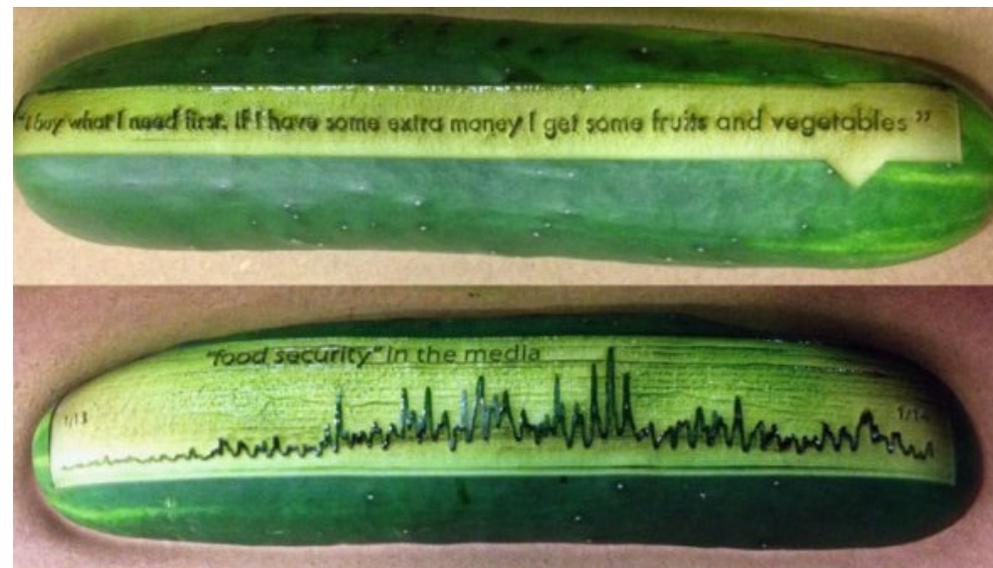




A

Printrbot Simple  
3D printer

paste extruder

plate

heat plate

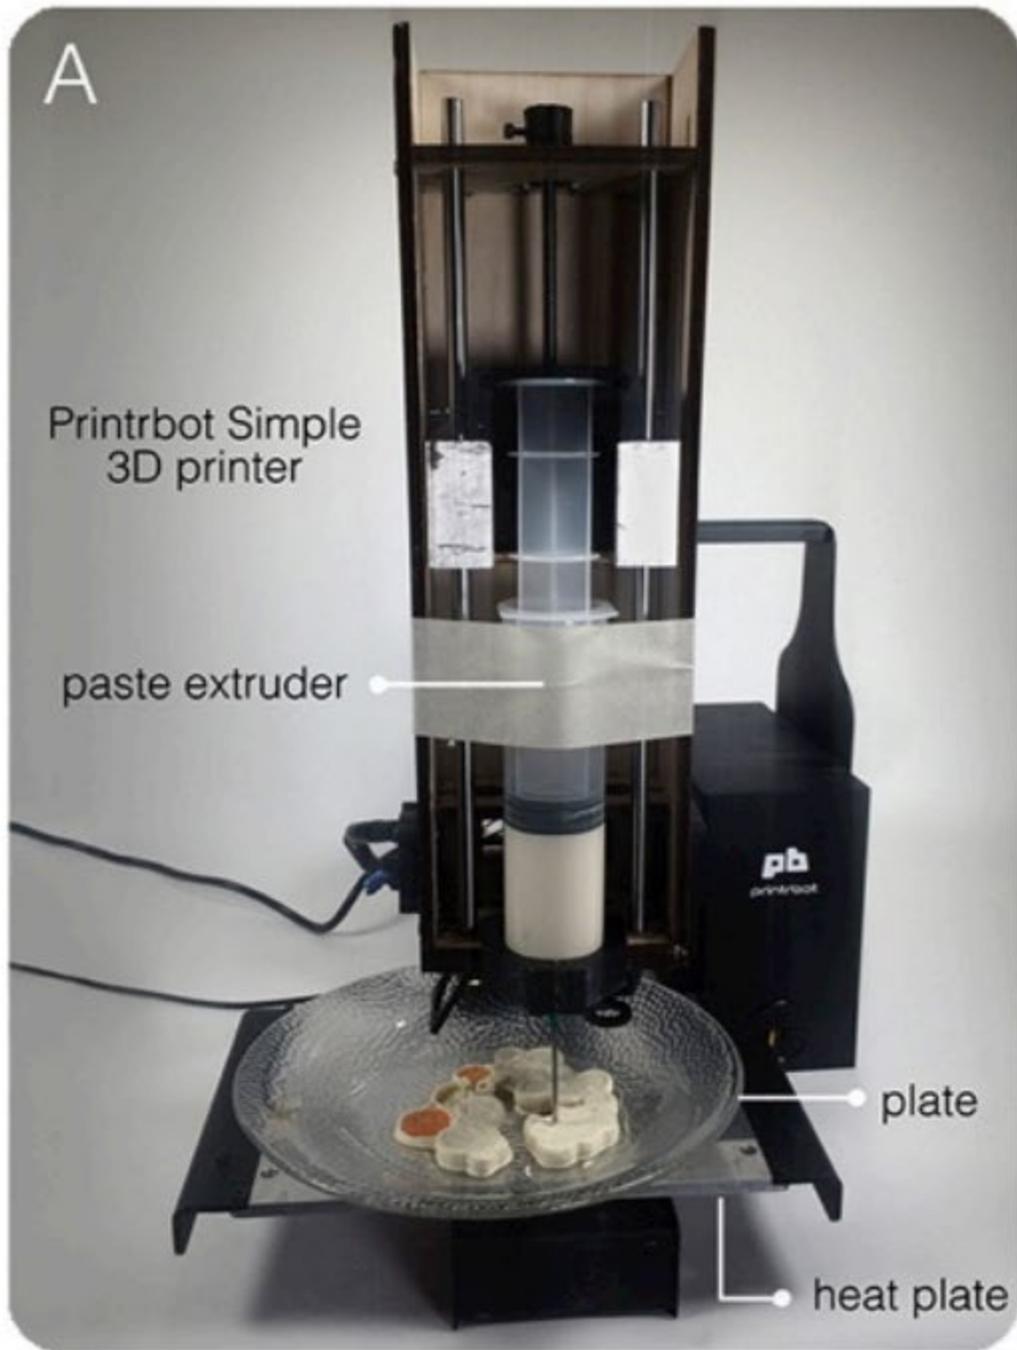

B

CNC 3D mill root vegetable clamp



C

Universal VLS3.50 Laser Platform

edible  
object

Acktar  
Spectral Black™  
coated foil





## Digital Gastronomy: Methods & Recipes for Hybrid Cooking

Moran Mizrahi<sup>1</sup>  
moran.mizrahi@mail.huji.ac.il

Amos Golan<sup>2</sup>  
amosg@mit.edu

Ariel Bezeleli Mizrahi<sup>1</sup>  
arielmi@cs.huji.ac.il

Rotem Gruber<sup>3</sup>  
gruberotem@gmail.com

Alexander "Zoonder" Lachnisch  
zoonder@gmail.com

Amit Zoran<sup>13</sup>  
zoran@cs.huji.ac.il

The Hebrew University of Jerusalem<sup>1</sup>, Israel, MIT Media Lab<sup>2</sup>, and Bezalel Academy of Arts and Design<sup>3</sup> Jerusalem, Israel

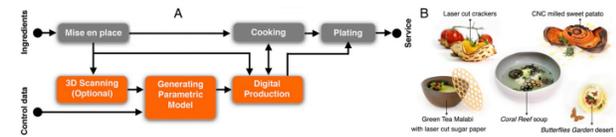


Figure 1: (A) A general scheme of a hybrid cooking procedure, using manual and digital techniques to allow personalization of a dish. Gray: traditional cooking. Orange: interaction with digital procedure. (B) Five examples of dishes made using hybrid cooking techniques.

### ABSTRACT

Several recent projects have introduced digital machines to the kitchen, yet their impact on culinary culture is limited. We envision a culture of Digital Gastronomy that enhances traditional cooking with new HCI capabilities, rather than replacing the chef with an autonomous machine. Thus, we deploy existing digital fabrication instruments in traditional kitchen and integrate them into cooking via *hybrid recipes*. This concept merges manual and digital procedures, and imports parametric design tools into cooking, allowing the chef to personalize the tastes, flavors, structures and aesthetics of dishes. In this paper we present our hybrid kitchen and the new cooking methodology, illustrated by detailed recipes with degrees of freedom that can be set digitally prior to cooking. Lastly, we discuss future work and conclude with thoughts on the future of hybrid gastronomy.

**Author Keywords**  
Food, kitchen, cooking, design, 3D printing, fabrication.

**ACM Classification Keywords**  
H.5.2. User Interfaces: User-centered design.

### INTRODUCTION

Recently we have witnessed a growing number of projects importing digital technologies into the kitchen, in the form of food printers [18], robotic cooks [6,34,43], or theoretical research on the semantics and procedural relationship in culinary recipes [2,17,27,37]. Nevertheless, although the vision of Digital Gastronomy is not new [46], the potential of computers to enhance our culinary and cooking culture is still awaiting its bloom. Many of the new digital cooking developments present a high degree of technical sophistication, and are often biased towards quantitative reductionism of culinary culture. These projects suggest that cooking can be represented by a finite set of instructions, which can then be analytically manipulated to control fully autonomous machines.

The kitchen is more than a territory for digital augmentation seeking efficiency and control: it is a place where culture and meaning evolve [1], and creativity is celebrated [15]. Yet, although it holds major potential for interaction studies, within the HCI community the discourse on cooking is still limited, as recent research papers largely discuss eating habits, diet and the food media [5,12,43].

**UIST 2016**

Mizrahi et.al.


**never cut materials**  
that are **flammable**  
create **toxic fumes**

Ask the lab manager (or me) before you try novel materials

# can we laser cut metal and glass?


No we can't, at least not with CO2 laser cutter.

We may **engrave** glass, coated metal, marble, anodized aluminum, titanium, some phones, tablets, and laptops

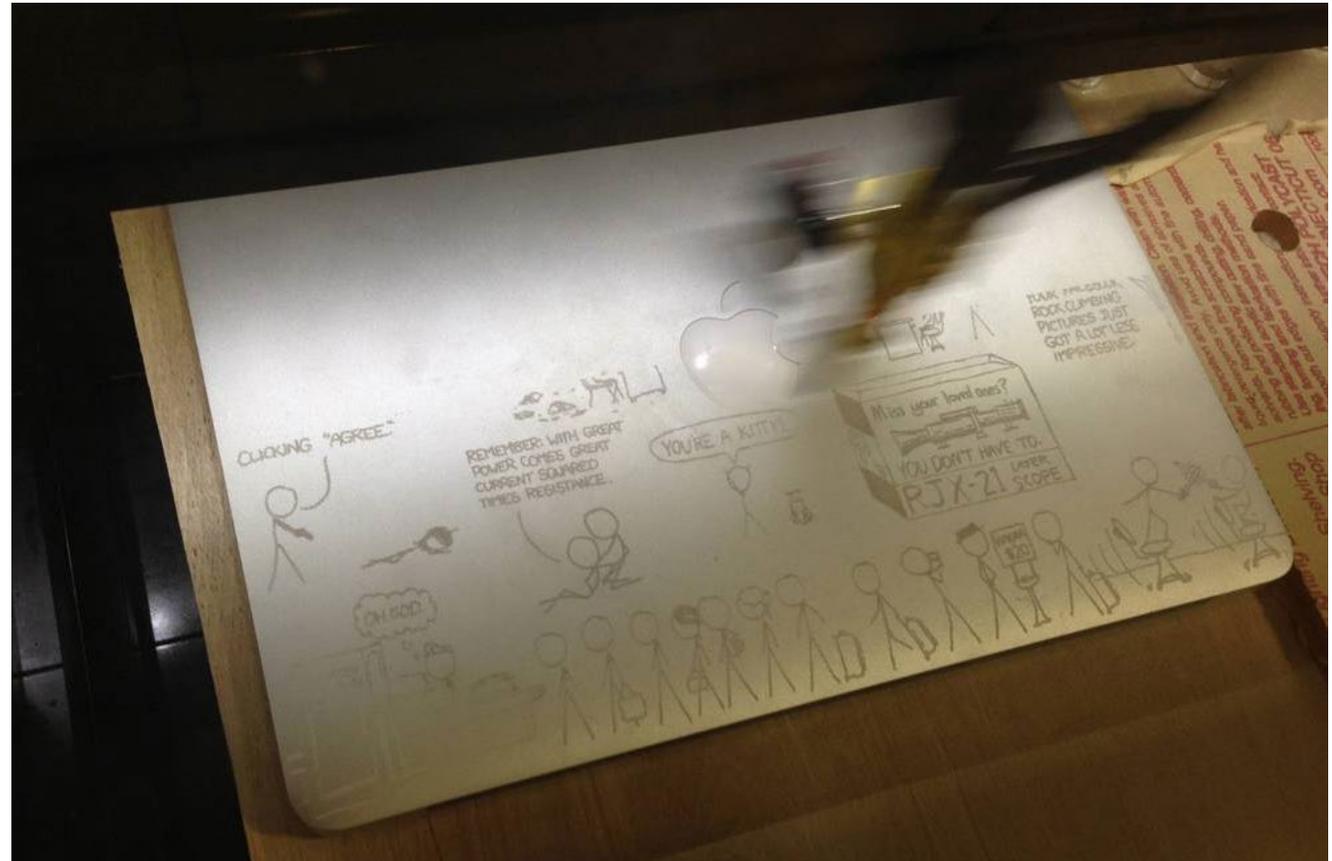

# can we laser cut metal and glass?




However, IRB0102 has a fiber laser that allows engraving and cutting on metals

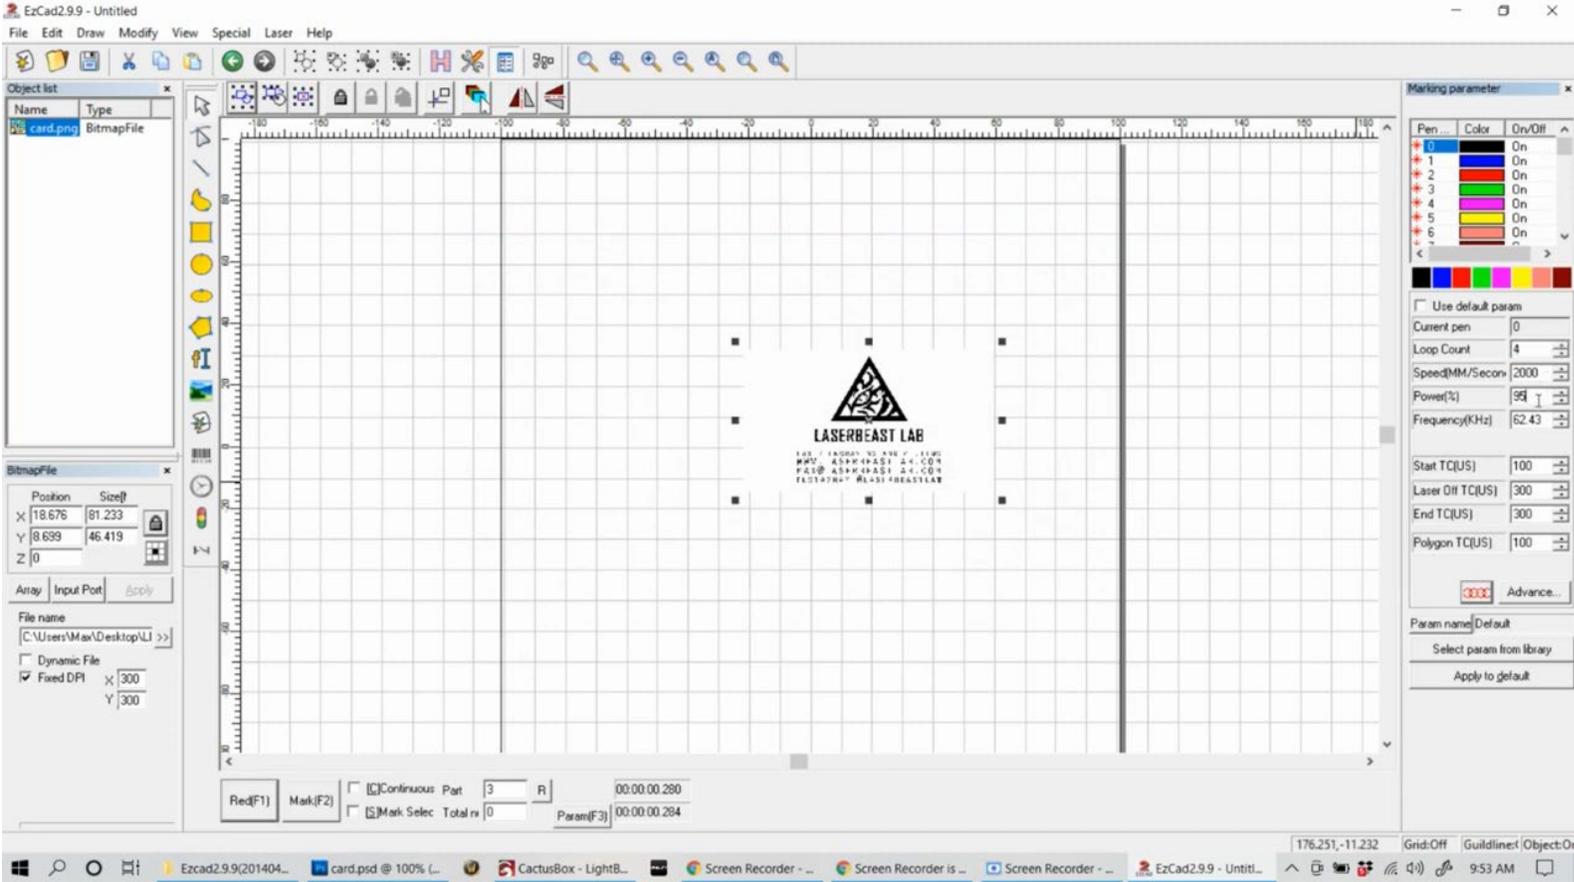



laser features #3

# **Joints - creating 3D objects**


# finger joints (box joints)

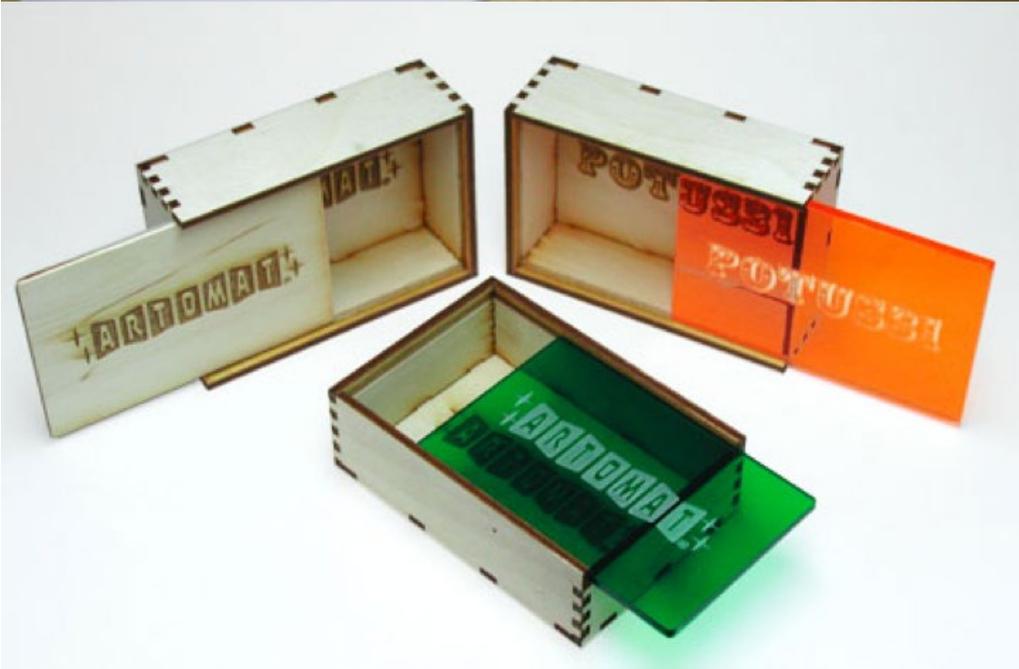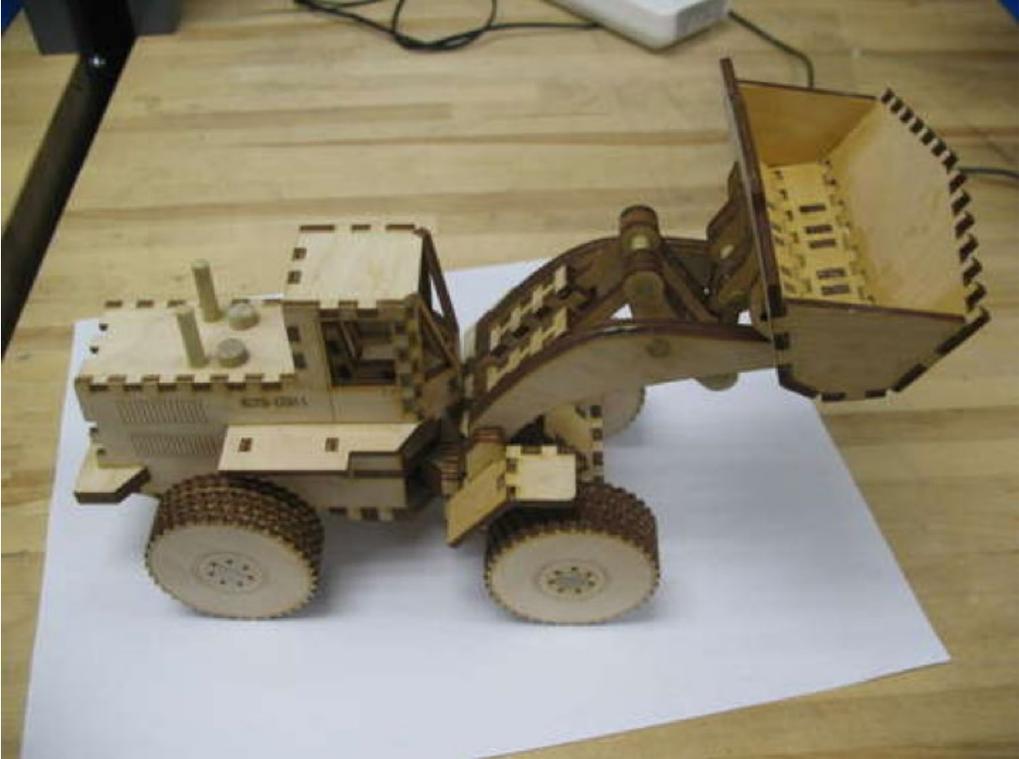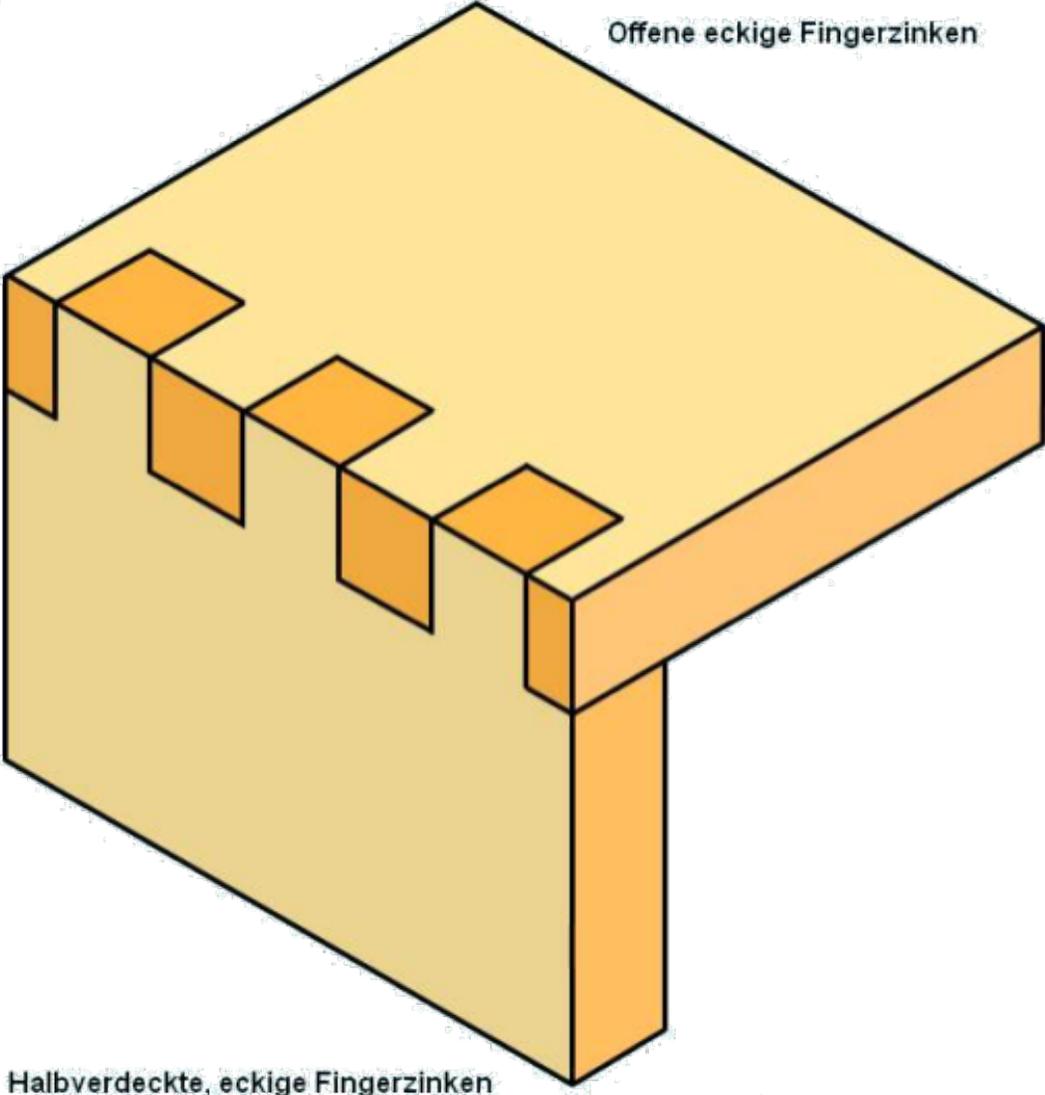

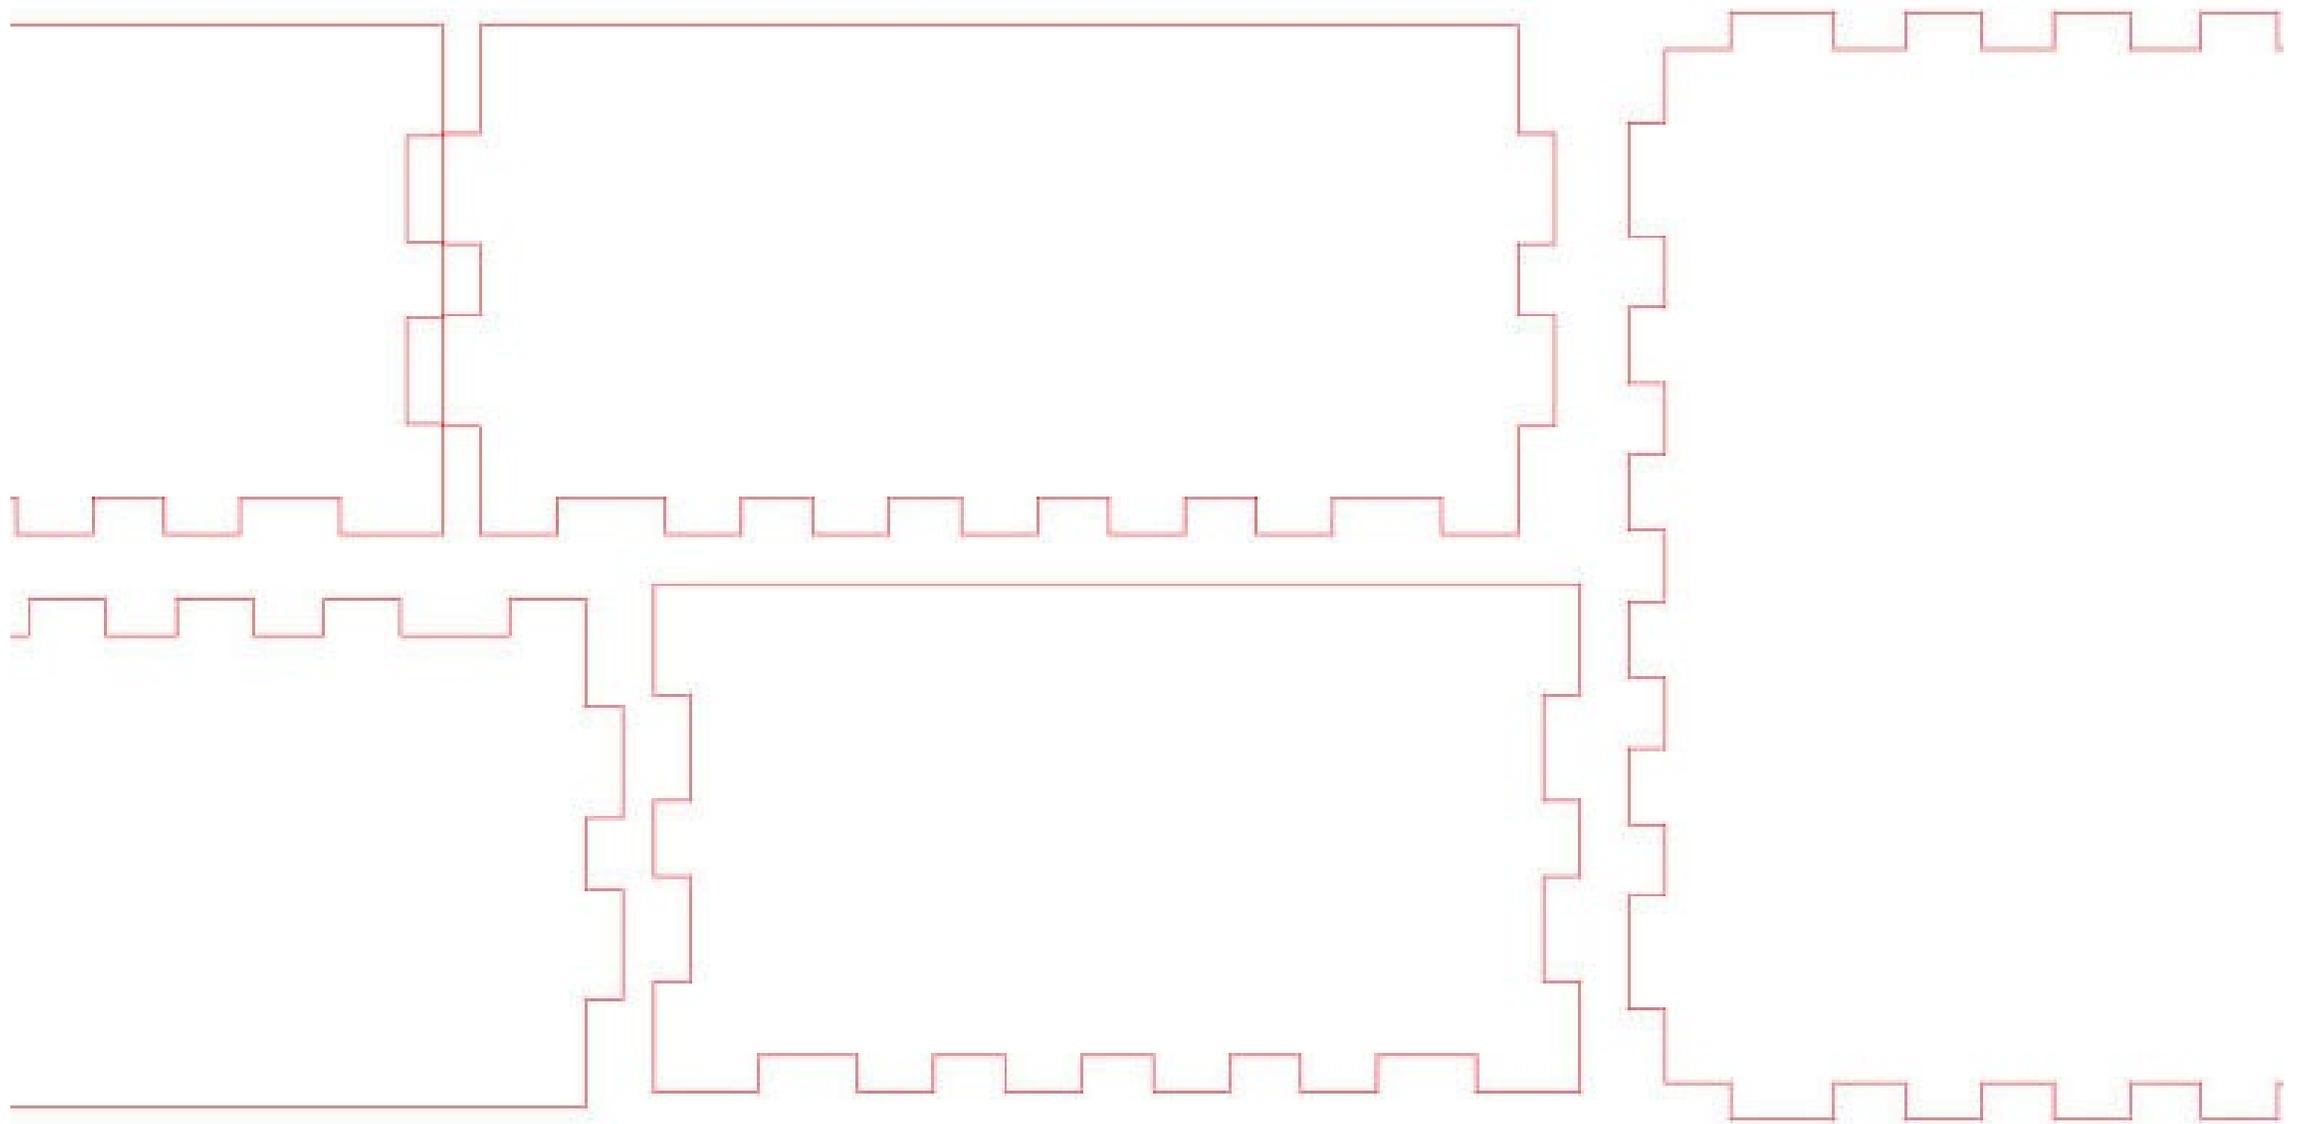

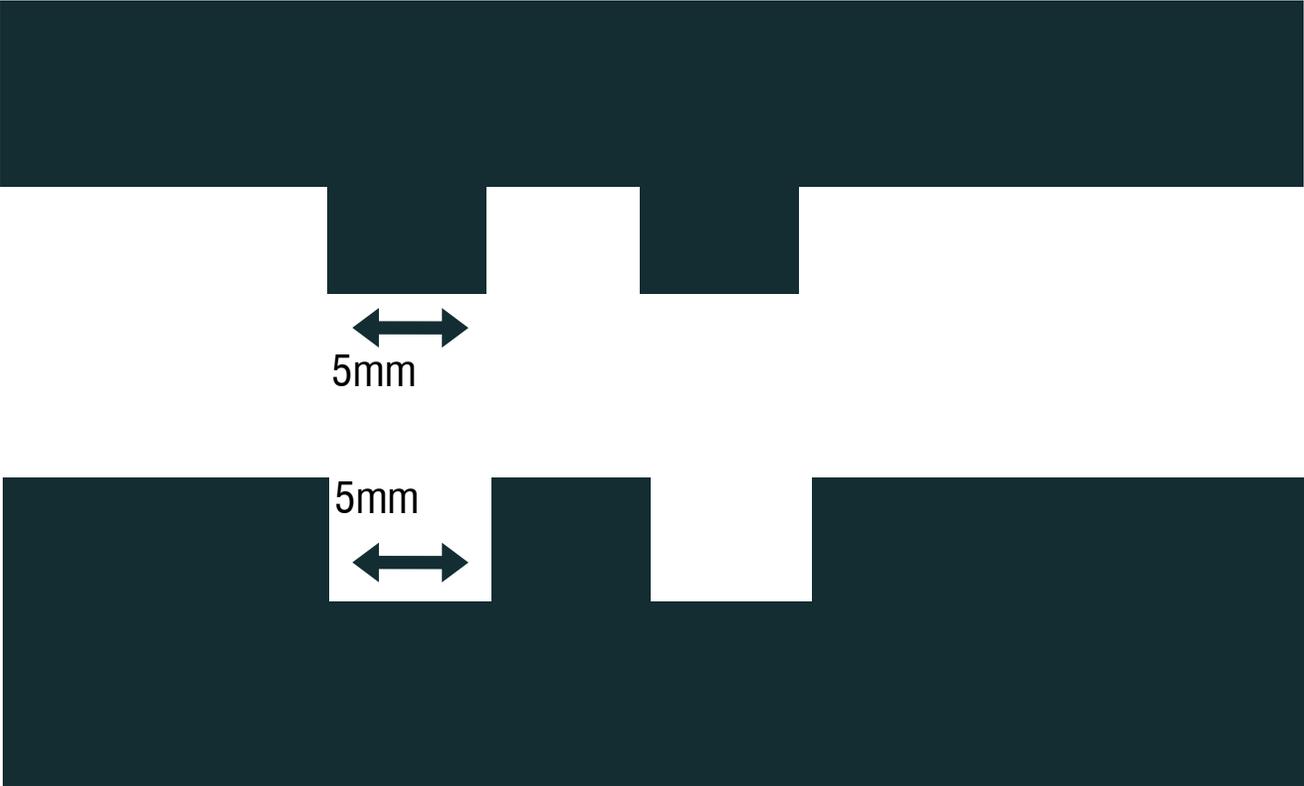

will this fit?

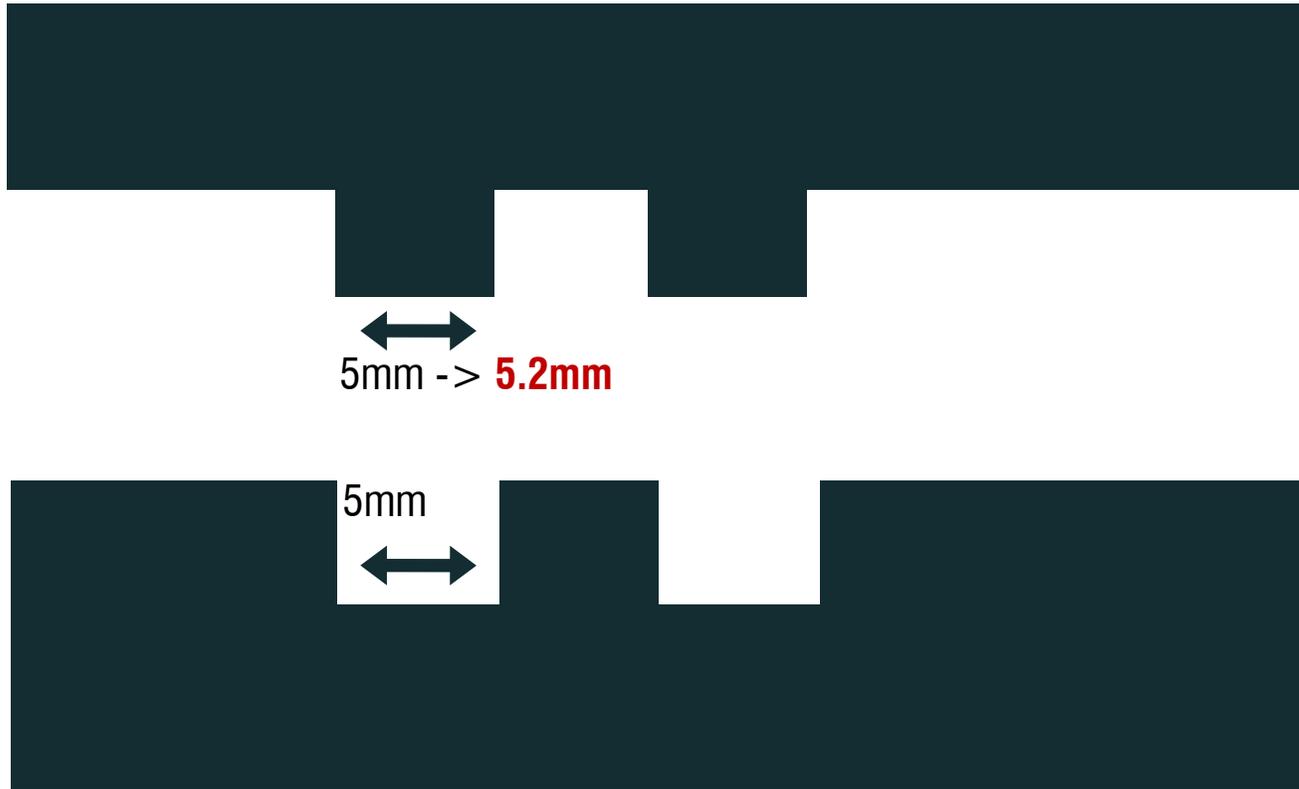

no, it will not fit.  
it will be very **loose**

material **evaporates** during cutting.  
you need to make the **joint larger than the gap**

# Box Designer

Give us dimensions and we'll generate a PDF you can use to cut a notched box on a laser-cutter. Check out this [example box design](#). People have used this website to design more than 150,000 boxes!

Use this box designer a lot? Consider chipping in some money to support our hosting and bug fixes!

[Donate](#)

email: rahul [ at ] connectionlab [ dot ] org  
a Connection Lab project  
twitter: @rahulbot  
version 2.1.0

Add your picture to the flickr pool!



Fork me on GitHub

**UNITS** inches

**DIMENSIONS** 4 x 5 x 6 ?

**MATERIAL THICKNESS** 0.1875 ?

[ **ADVANCED OPTIONS** ]

**NOTCH LENGTH** 0.46875  Auto ?

**CUT WIDTH** 0 ?

**BOUNDING BOX**  Draw bounding box ?



Design It!

**other connection joints**



### Hem

- 1 Hem Offset
- 2 Hole Spacing
- 3 Hole Diameter



### Interlocking

- 1 Tab Height
- 2 Tab Width
- 3 Grip
- 4 Material Thickness



### Loop Insert

- 1 Hook Size
- 2 Hook Width
- 3 Hem Offset
- 4 Material Thickness
- 5 Hook Count



### Flap

- 1 Flap Height
- 2 Hole Spacing
- 3 Hole Diameter





### Finger

- 1 Material Thickness
- 2 Finger Width
- 3 Interior Angle



### Tab Insert

- 1 Tab Height
- 2 Tab Width
- 3 Grip
- 4 Material Thickness
- 5 Flap Height

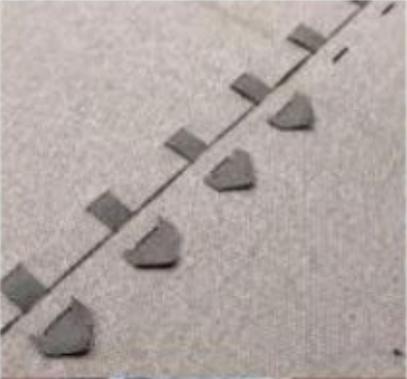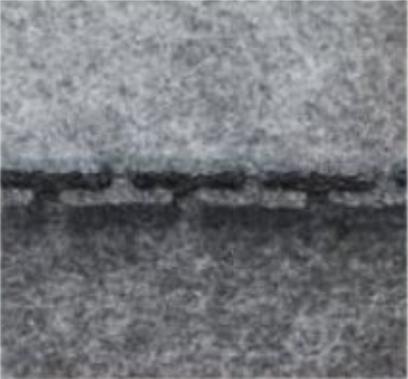

A


B

C

D

E

F

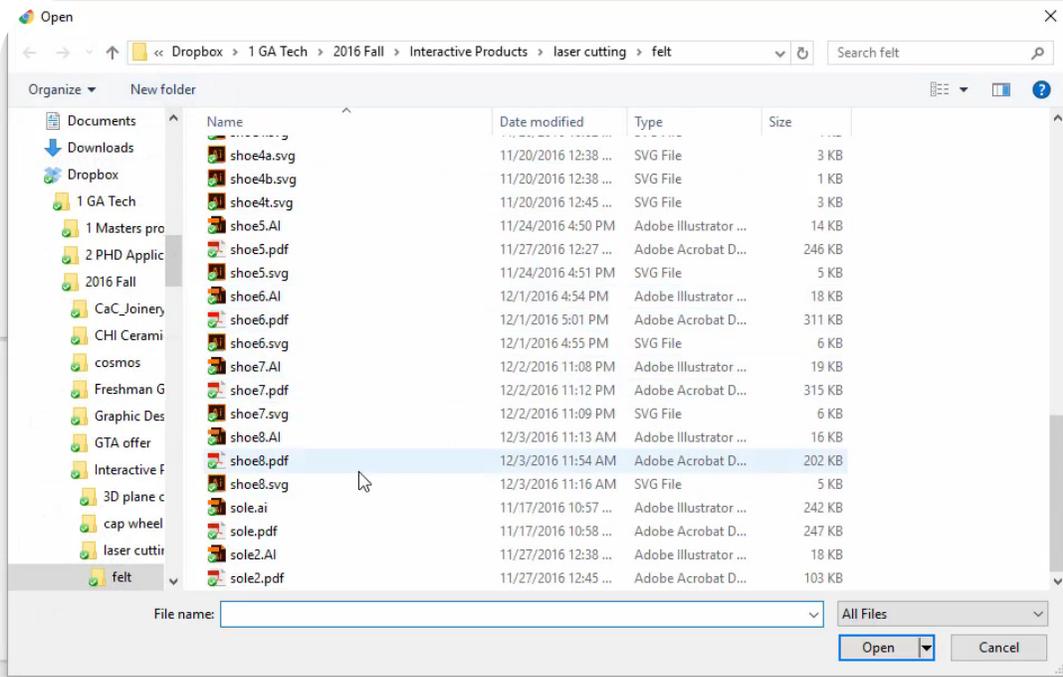

Designs are transferred and out of the system as SVG files.

Joint Profiles
loop insert (overlap) ▾ ADD LOAD

---

Session: The Art and Science of Making C&C 2017, June 27–30, 2017, Singapore

### Joinery: Parametric Joint Generation for Laser Cut Assemblies

**Clement Zheng**<sup>†</sup>

<sup>\*</sup>Georgia Institute of Technology <sup>†</sup>National University of Singapore

clement.zheng@gatech.edu

**Ellen Yi-Luen Do**<sup>\*</sup>

ellendo@gatech.edu

**Jim Budd**<sup>\*</sup>

jim.budd@design.gatech.edu

**Hem**

- Hem Offset
- Hem Spacing
- Hole Diameter
- Material Thickness

**Interlocking**

- Tab Height
- Tab Width
- Grip
- Material Thickness

**Loop Insert**

- Hook Size
- Hook Width
- Hem Offset
- Material Thickness
- Hook Count

**Flap**

- Flap Height
- Flap Spacing
- Hole Diameter

**Finger**

- Material Thickness
- Tab Width
- Interior Angle

**Tab Insert**

- Tab Height
- Tab Width
- Grip
- Material Thickness
- Flap Height

Figure 1: Joinery's parametric joint profiles for laser cutting.

**ABSTRACT**  
Laser cutting is widely used by industrial designers and mechanical engineers as a rapid modeling tool. However, designing and fabricating laser cut assemblies can be a complex and tedious process, especially for novice designers. Through our research, we developed *Joinery*, a parametric joint generation tool for laser cut assemblies. Through *Joinery*, designers simply define connections between parts of an assembly, while the system generates the joints. *Joinery* supports fabrication-aware design through six different joint profiles that cater to different material and design needs. In this paper, we illustrate the use of *Joinery* as a creativity support tool in an industrial design process, and present several artifacts resulting from the tool. In addition, we discuss our findings from deploying this system in a college-level industrial design class.


**Author Keywords**  
Digital Fabrication; Creativity Support Tools; Design.

**ACM Classification Keywords**  
D.2.2 Design Tools and Techniques: User Interfaces.

**INTRODUCTION**  
Digital fabrication has been celebrated in recent years as a catalyst for shifting our design and manufacturing away from mass production; and into a "market of one" paradigm where we can make "almost everything" [5]. Its impact has been increasingly discussed within the HCI (human-computer interaction) academic field, and many innovative digital fabrication tools have been proposed to facilitate creative "making" endeavors [2,8,17,20]. Certainly, mechanical engineers and industrial designers benefit greatly from the advance of digital fabrication tools and processes—3D printers and laser cutters are employed as rapid modeling

C&C 2018

Zheng et.al.

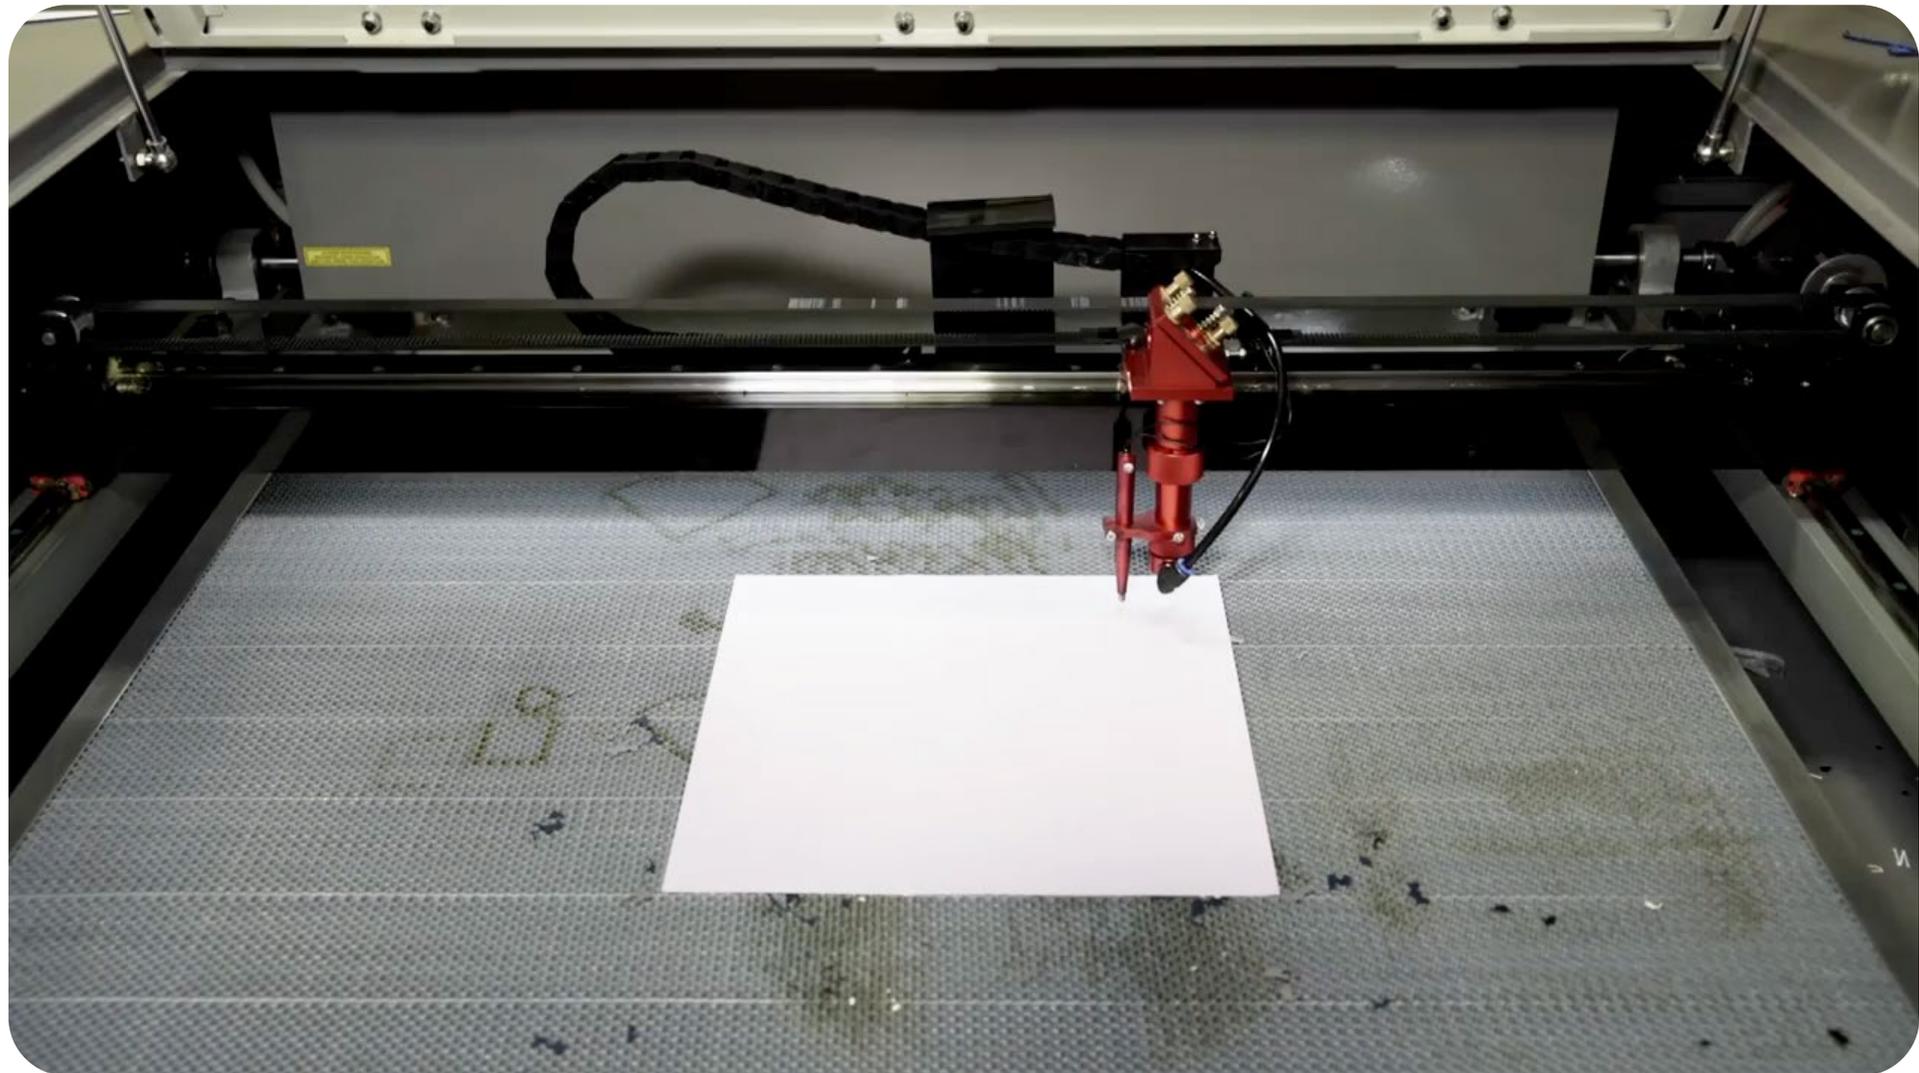


We already talked about 3D printing, why laser cutting?


**Fast** (Good for iteration)

**Durable** (because there is no layer bonding)


**Simple** (Similar to 2D paper printing)

replace 3D print with laser cut **2D plates**:

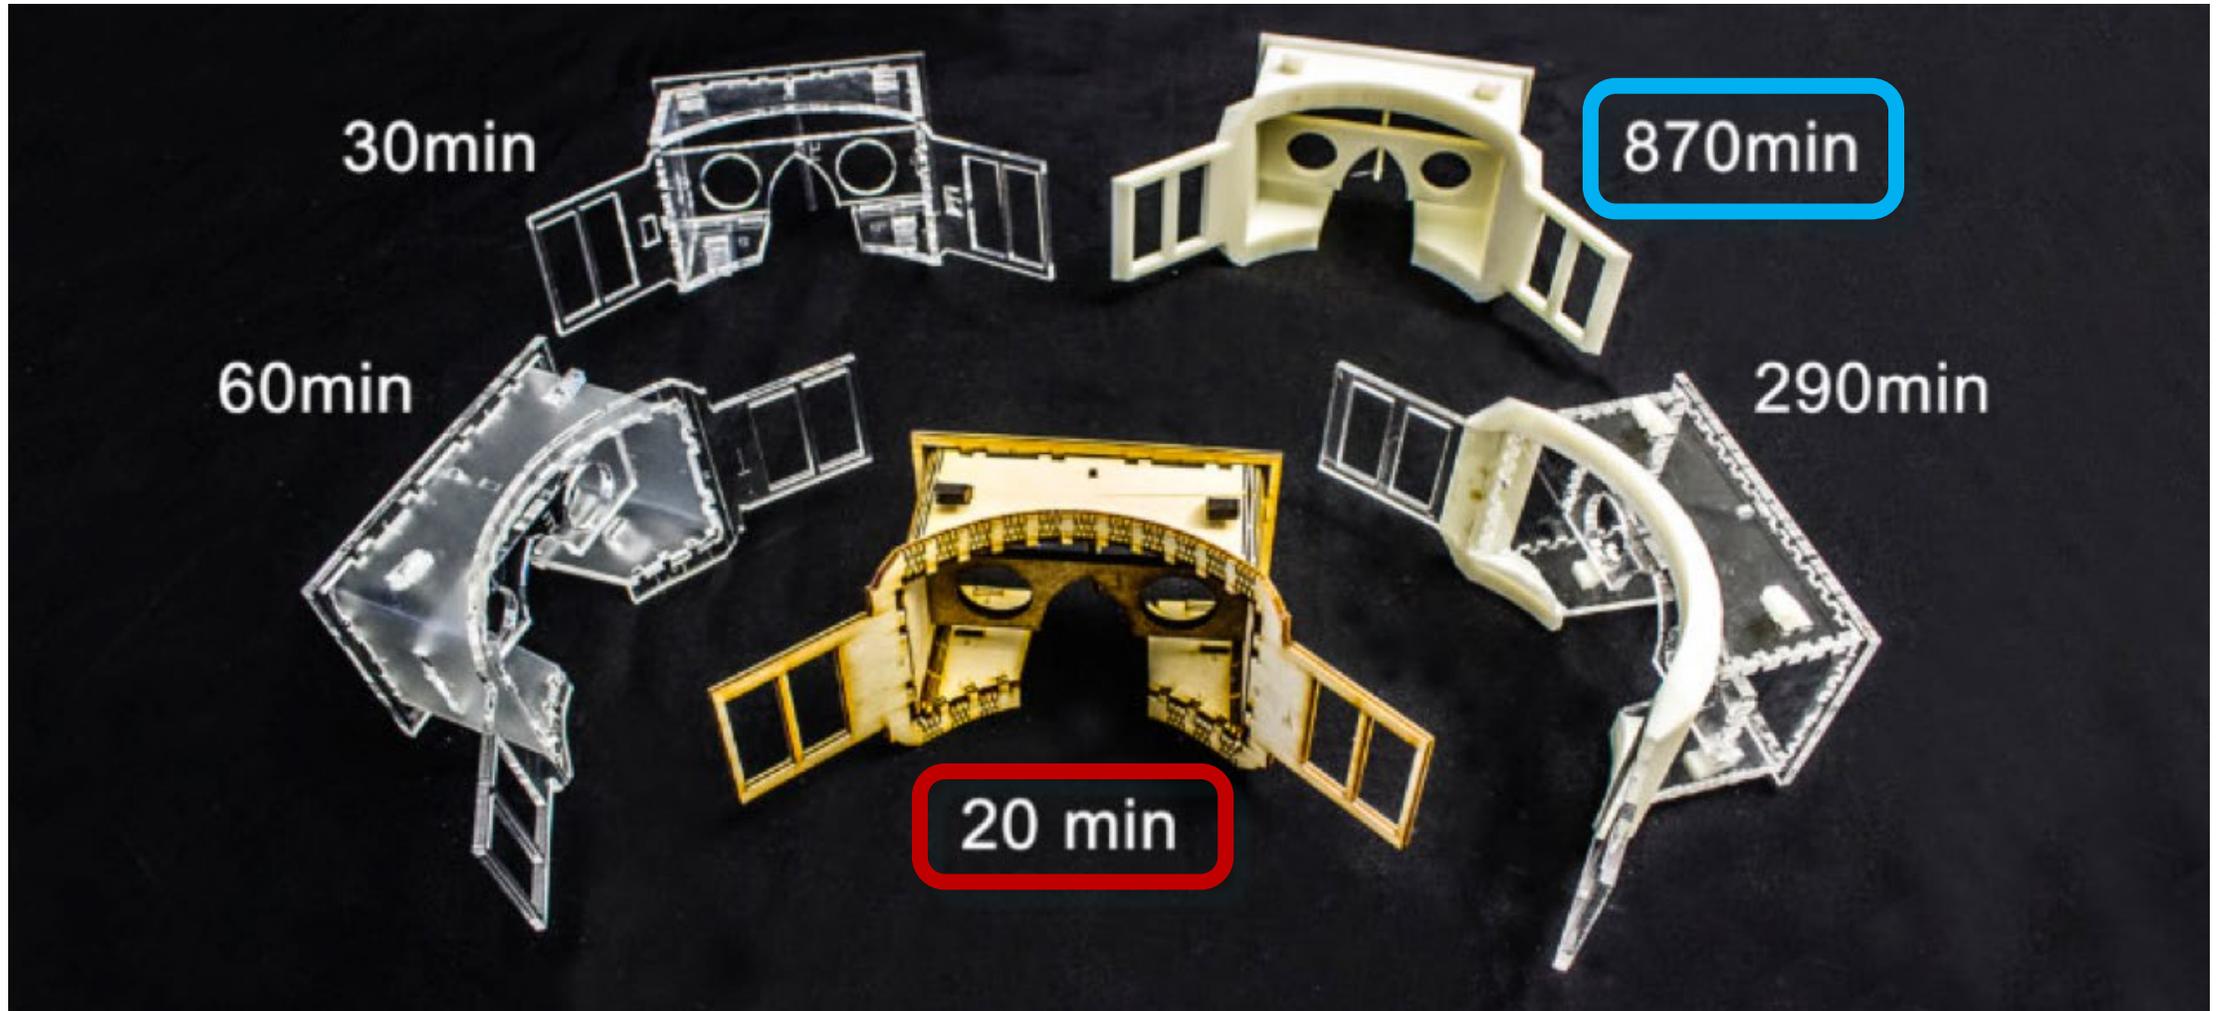

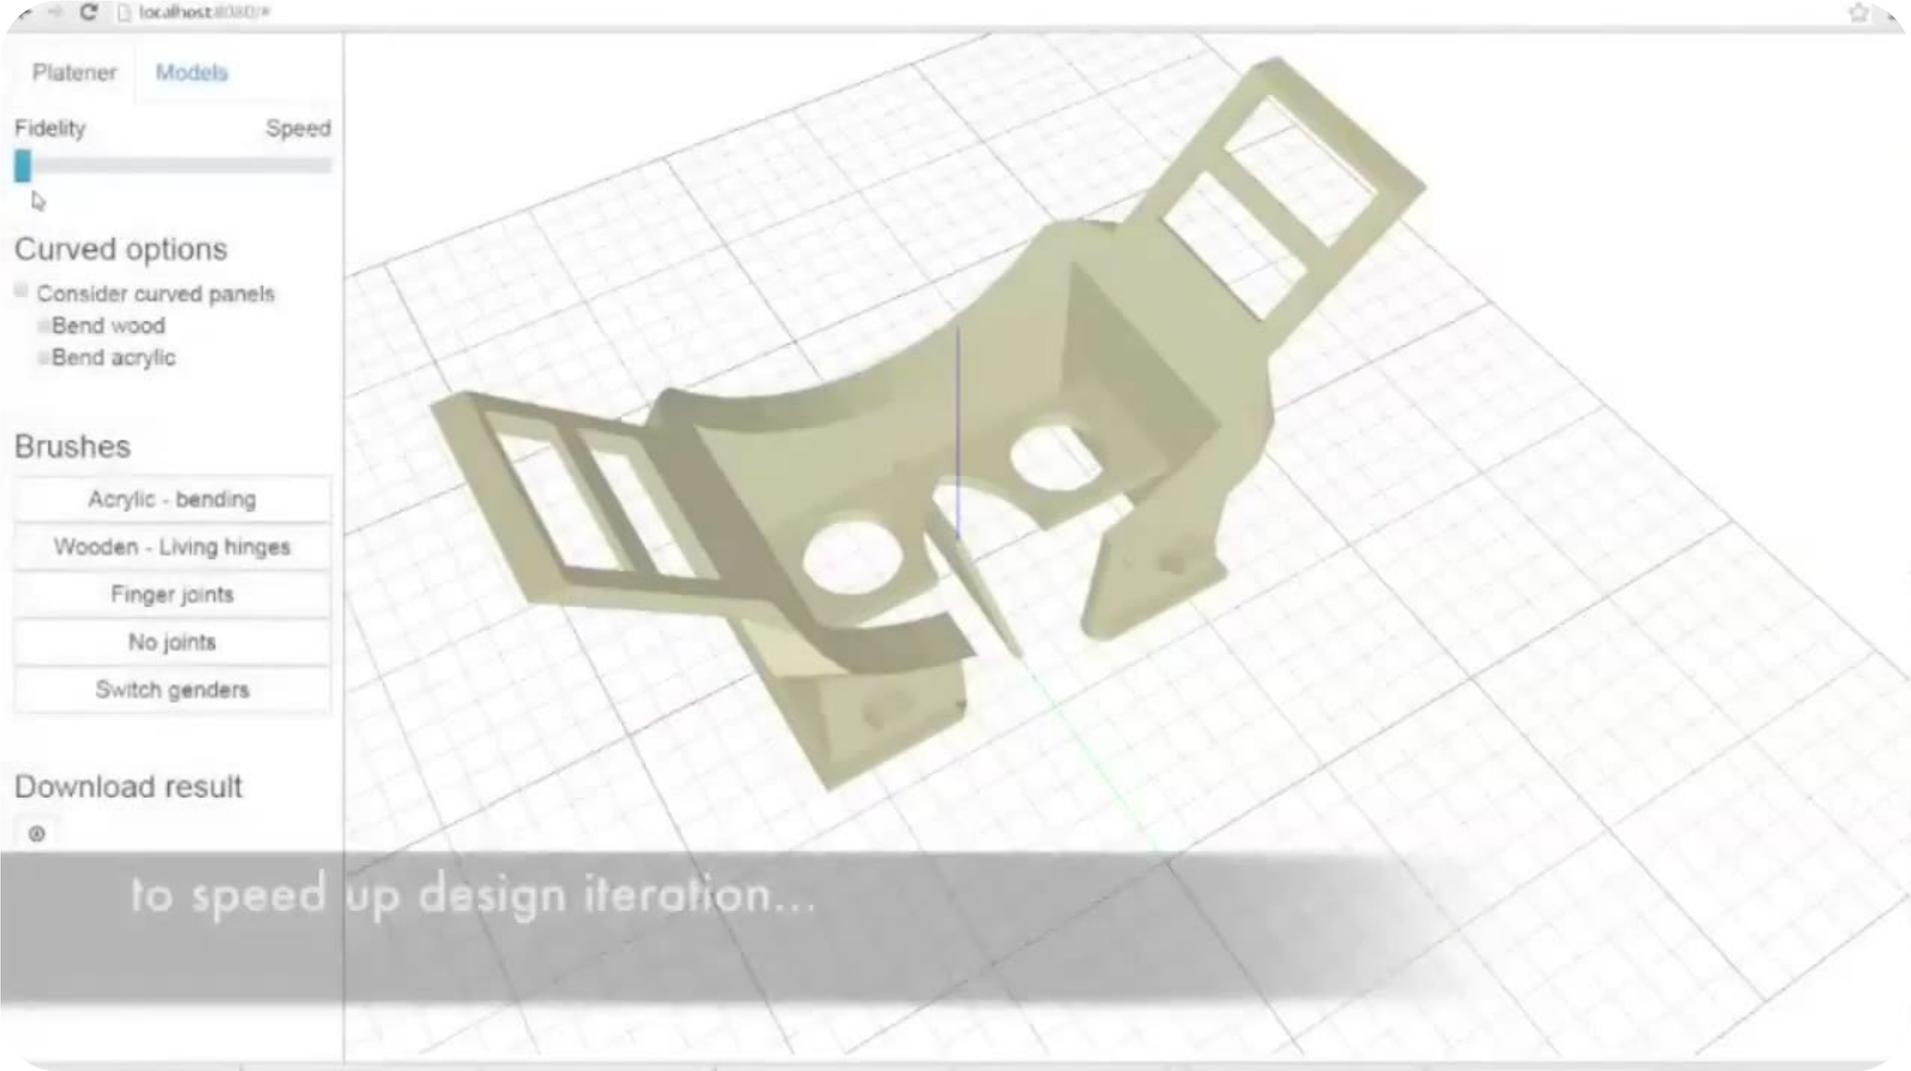

to speed up design iteration...

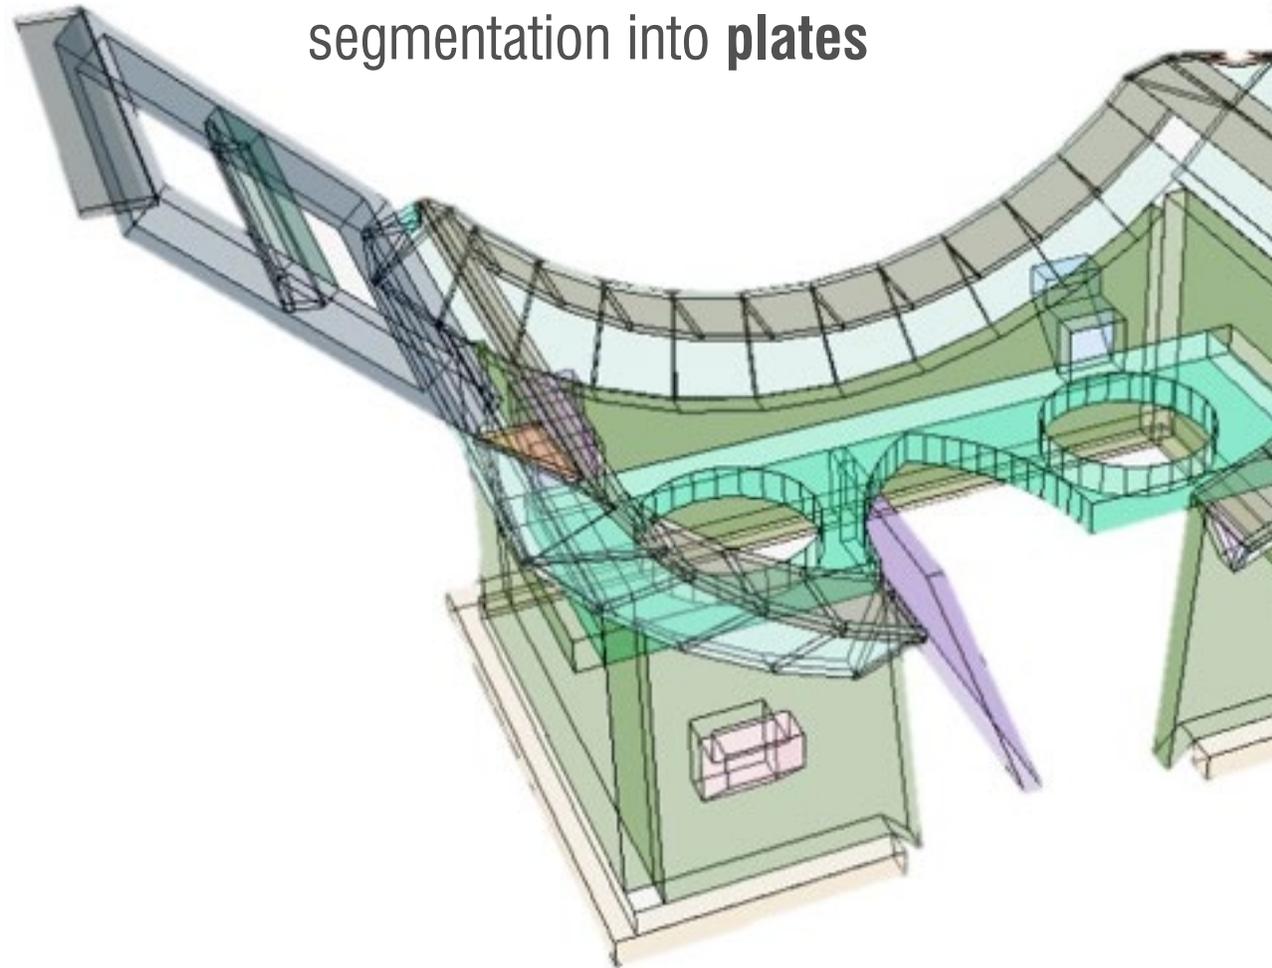

segmentation into plates



## Platener: Low-Fidelity Fabrication of 3D Objects by Substituting 3D Print with Laser-Cut Plates

Dustin Beyer, Serafima Gurevich, Stefanie Mueller, Hsiang-Ting Chen, Patrick Baudisch  
 Hasso Plattner Institute, Potsdam, Germany  
 {firstname.lastname}@hpi.uni-potsdam.de

### ABSTRACT

This paper presents Platener, a system that allows quickly fabricating intermediate design iterations of 3D models, a process also known as low-fidelity fabrication. Platener achieves its speed-up by extracting straight and curved plates from the 3D model and substituting them with laser cut parts of the same size and thickness. Only the regions that are of relevance to the current design iteration are executed as full-detail 3D prints. Platener connects the parts it has created by automatically inserting joints. To help fast assembly it engraves instructions. Platener allows users to customize substitution results by (1) specifying fidelity-speed tradeoffs, (2) choosing whether or not to convert curved surfaces to plates bent using heat, and (3) specifying the conversion of individual plates and joints interactively.

Platener is designed to best preserve the fidelity of *functional* objects, such as casings and mechanical tools, all of which contain a large percentage of straight/rectilinear elements. Compared to other low-fab systems, such as faBrickator and WirePrint, Platener better preserves the stability and functionality of such objects: the resulting assemblies have fewer parts and the parts have the same size and thickness as in the 3D model.

To validate our system, we converted 2,250 3D models downloaded from a 3D model site (*Thingiverse*). Platener achieves a speed-up of 10x or more for 39.9% of all objects.

**Author Keywords:** rapid prototyping; 3D printing; building blocks; physical prototyping.

**ACM Classification Keywords:** H5.2 [Information inter-

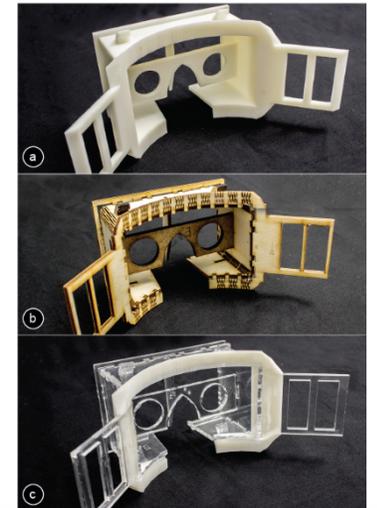


Figure 1: Platener speeds up the fabrication process by

UIST 2015

Beyer et.al.

Why **laser cutter** again?



## Kyub: A 3D Editor for Modeling Sturdy Laser-Cut Objects

Patrick Baudisch, Arthur Silber, Yannis Kommanna, Milan Gruner, Ludwig Wall, Kevin Reuss, Lukan Heilmann, Robert Kovacs, Daniel Rechlitz, and Thijs Roumen  
 Hasso Plattner Institute at the University of Potsdam  
 Potsdam, Germany  
 firstname.lastname@hpi.de



Figure 1: A selection of objects created using kyub, a software system that allows users to design 3D objects for laser cutting. By affording closed box structures, objects made using kyub are very strong. This allows users to make tables, shelves, and chairs that can hold a person. (All shown objects are assembled from 4mm plywood sheets—pressure fit, not glued).

### ABSTRACT

We present an interactive editing system for laser cutting called kyub. Kyub allows users to create models efficiently in 3D, which it then unfolds into the 2D plates laser cutters expect. Unlike earlier systems, such as FlatFab, kyub affords construction based on closed box structures, which allows users to turn very thin material, such as 4mm plywood, into objects capable of withstanding large forces, such as chairs users can actually sit on. To afford such sturdy construction, every kyub project begins with a simple finger-joint “boxel”—a structure we found to be capable of withstanding over 500kg of load. Users then

extend their model by attaching additional boxels. Boxels merge automatically, resulting in larger, yet equally strong structures. While the concept of stacking boxels allows kyub to offer the strong affordance and ease of use of a voxel-based editor, boxels are not confined to a grid and readily combine with kyub’s various geometry deformation tools. In our technical evaluation, objects built with kyub withstood hundreds of kilograms of loads. In our user study, non-engineers rated the learnability of kyub 6.1/7.

### CCS CONCEPTS

• Human-centered computing—Human computer interaction

### KEYWORDS

Personal fabrication; laser cutting; interactive editing.

### ACM Reference format:

Patrick Baudisch, Arthur Silber, Yannis Kommanna, Milan Gruner, Ludwig Wall, Kevin Reuss, Lukan Heilmann, Robert Kovacs, Daniel Rechlitz, and Thijs Roumen. 2019. Kyub: A 3D Editor for Modeling Sturdy Laser-Cut Objects. In *2019 CHI Conference on Human Factors in Computing Systems Proceedings (CHI 2019)*, May 4–9, 2019, Glasgow, Scotland, UK. ACM, New York, NY, USA. <https://doi.org/10.1145/3296605.3300796>

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, to republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions.acm.org](http://permissions.acm.org).  
 CHI 2019, May 4–9, 2019, Glasgow, Scotland, UK © 2019 Copyright is held by the owner(s). Publication rights licensed to ACM.  
 ACM ISBN 978-1-4503-5919-2/19/05...\$15.00  
<https://doi.org/10.1145/3296605.3300796>


laser features #4

**bending**

# living hinges




# living hinges

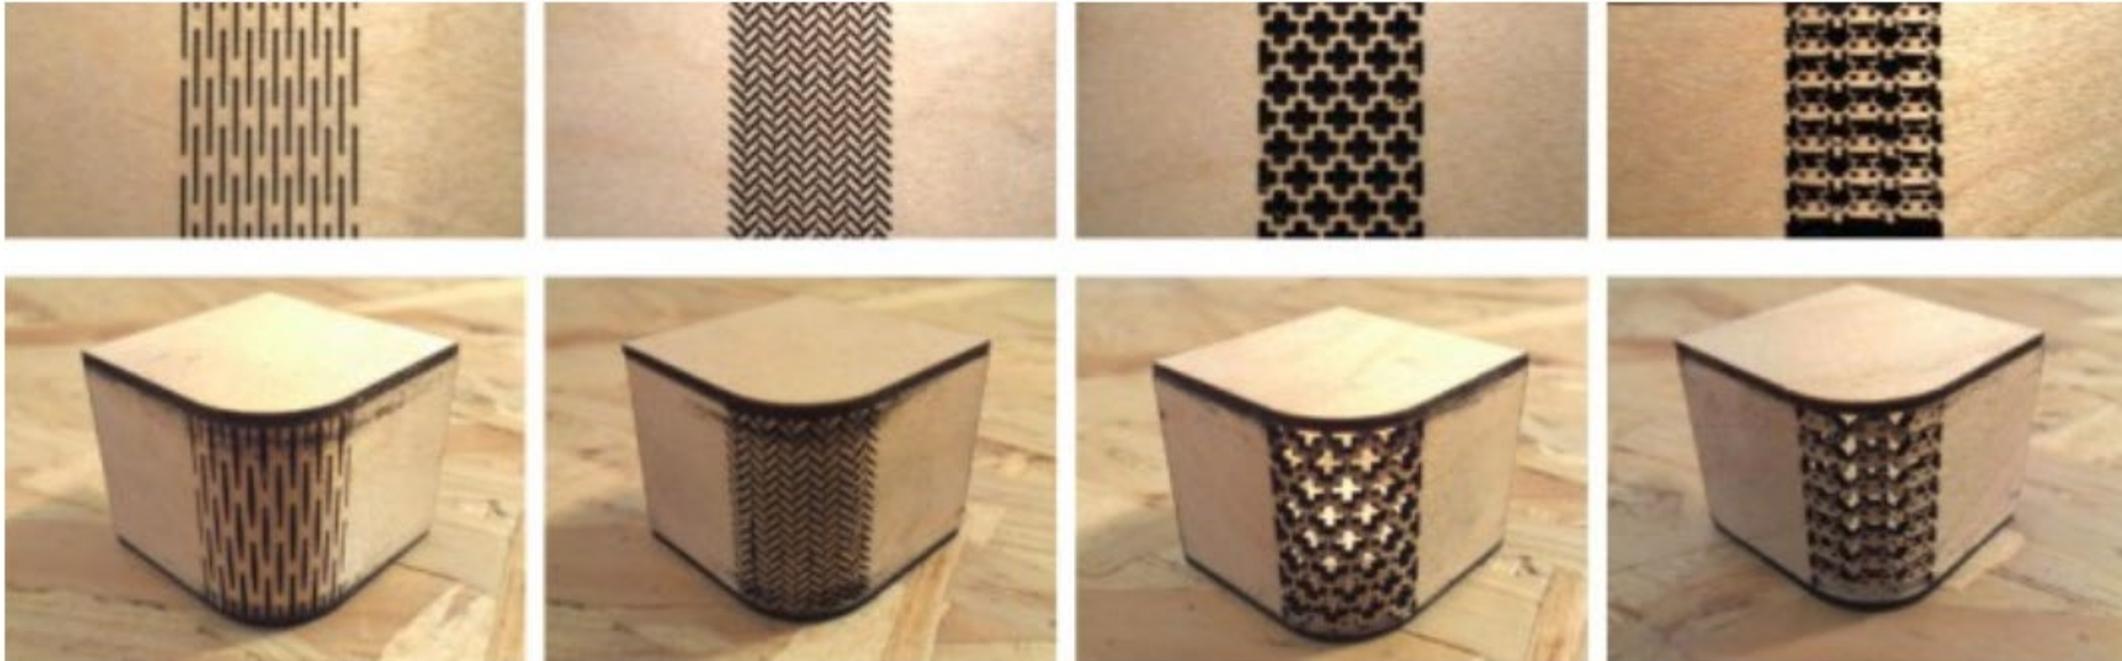


Repeated patterns with **continuous** connections  
Stiff material becomes bendable (with lightweight force applied)  
Only work for certain materials (i.e. **acrylics will not work**)

# bend acrylic

to bend acrylic use a **heat gun** or **strip heater**

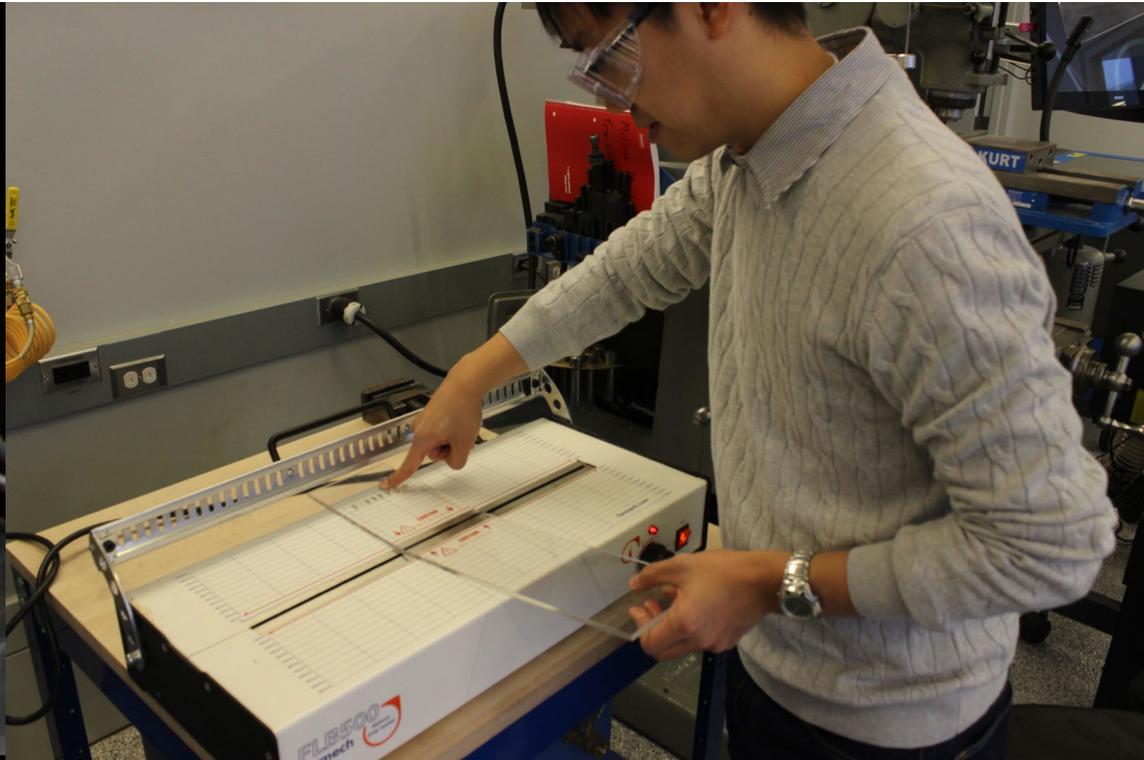


fixitsamo

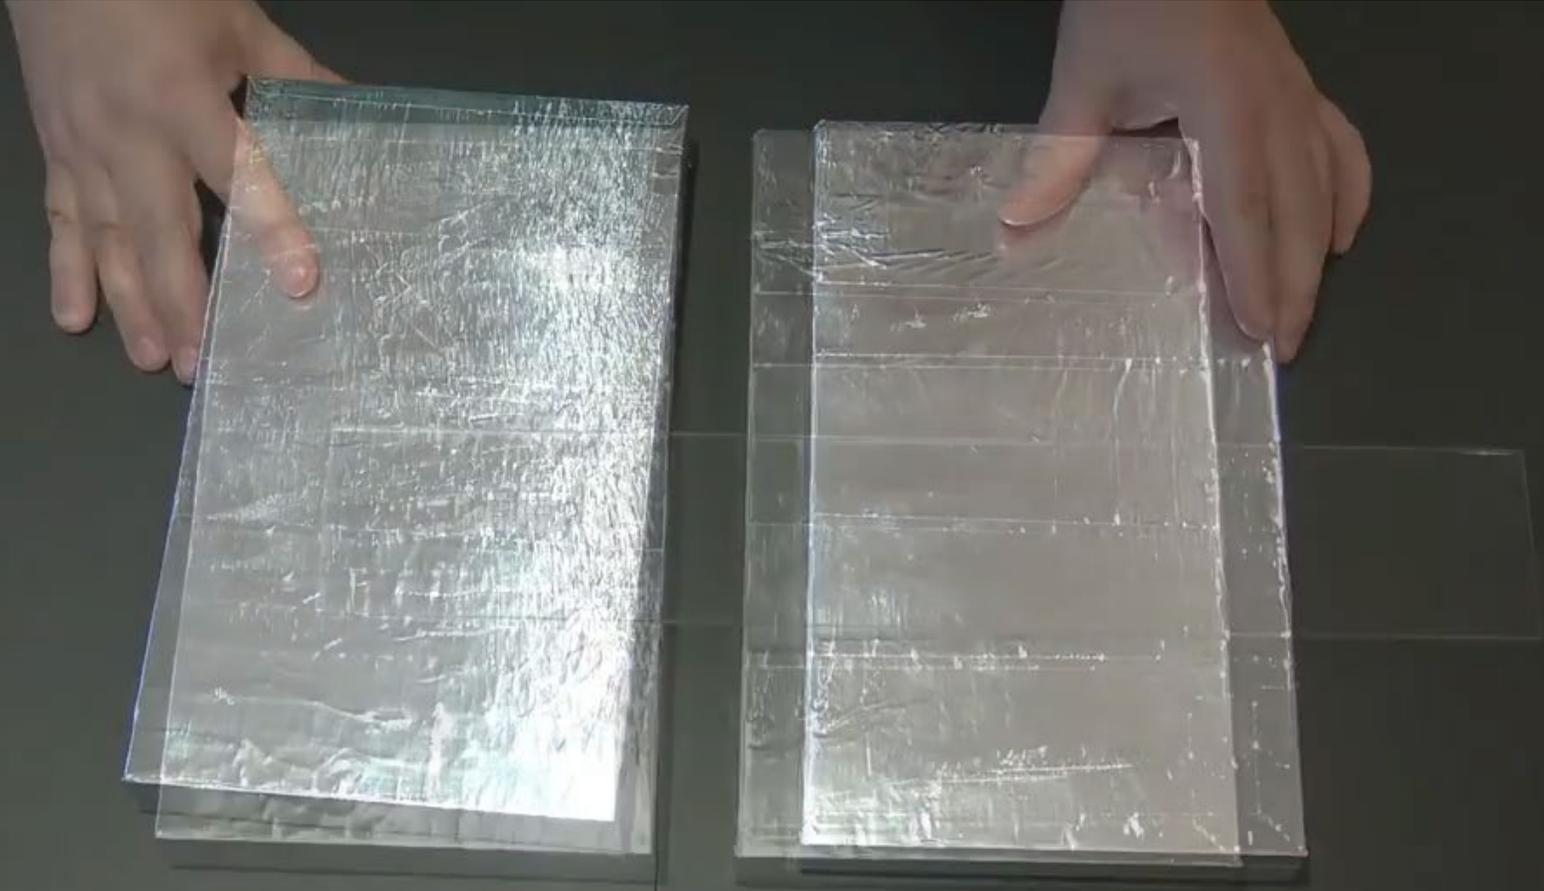


**other ways to make 3D**

# stacking

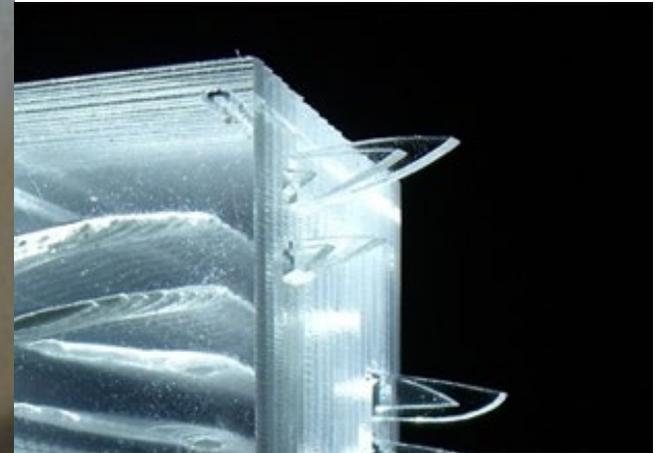


**intersecting**

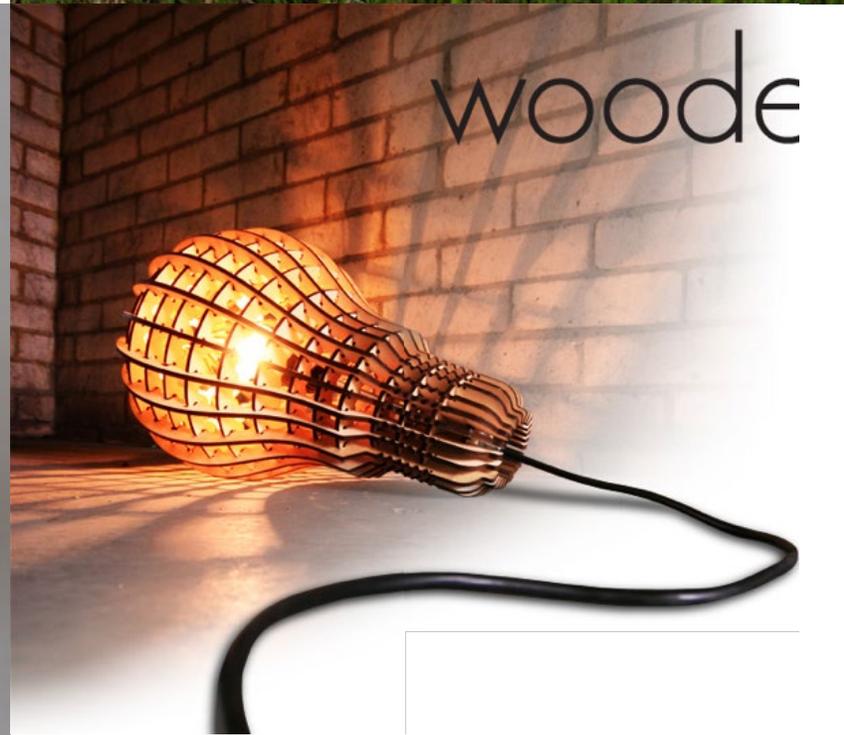

# surface folding



# Fusion 360 slicer

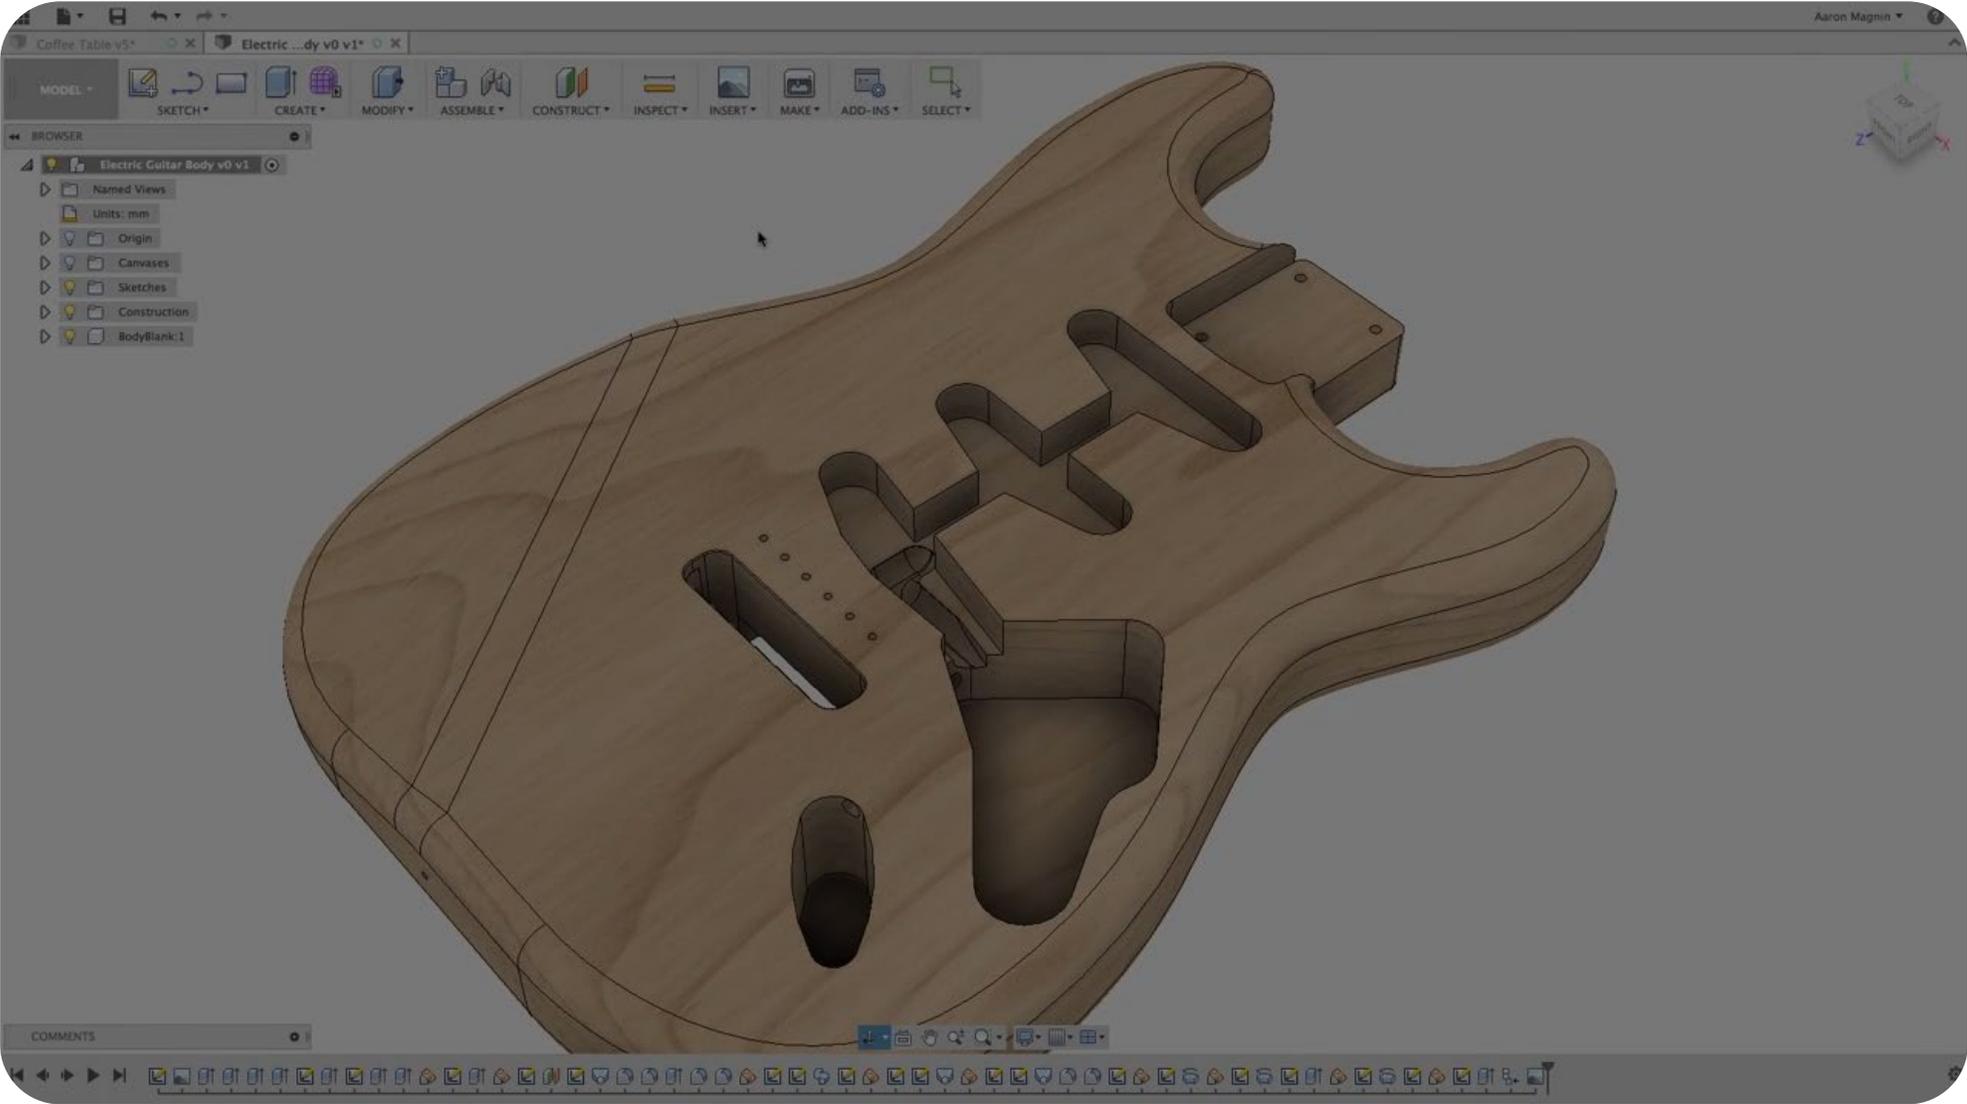

laser features #5:

**moving parts**

# GEAR GENERATOR

>>> Do you wanna try our internal gears?  
**PUBLIC BETA GeraGenerator 1.4**

## Animation:

Speed (RPM)\*:

\* Shift + Enter: Set RPM of the selected gear

## Gears:

**#0 - ratio: 1:1 - RPM: 6**

#1 - ratio: 2:1 - RPM: 3

#2 - ratio: 2:1 - RPM: 3

#3 - ratio: 10:1 - RPM: 0.6

## Connection properties

Parent gear #:

Axle connection:

Connection angle:

## Gear properties

Number of teeth\* (N):

Pitch diameter\* (D):

Diametral pitch (P):

Pressure Angle (PA):


\* Shift + Enter: modifies the Diametral pitch

## Download


Gear CAD file:

Gear vector image:

Gearset vector image:

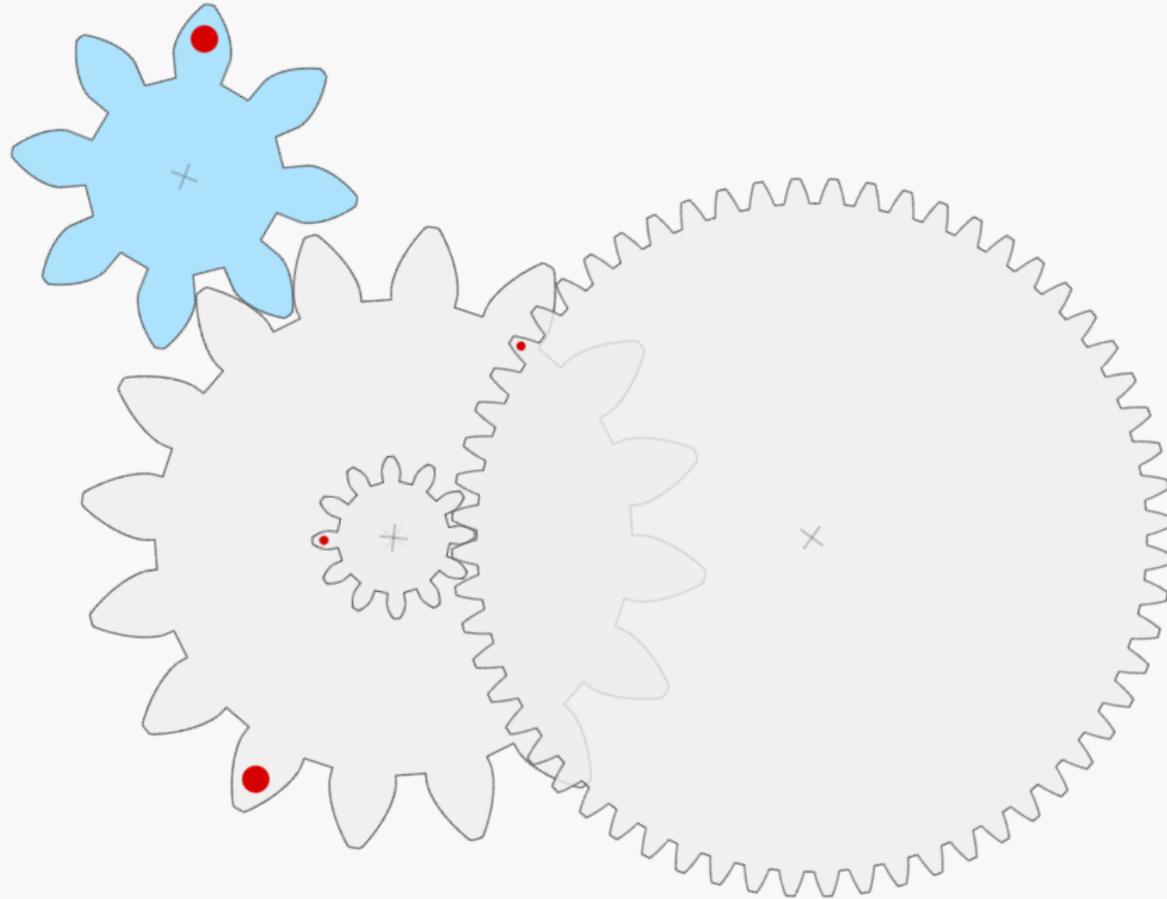

# **gears & linkages::**

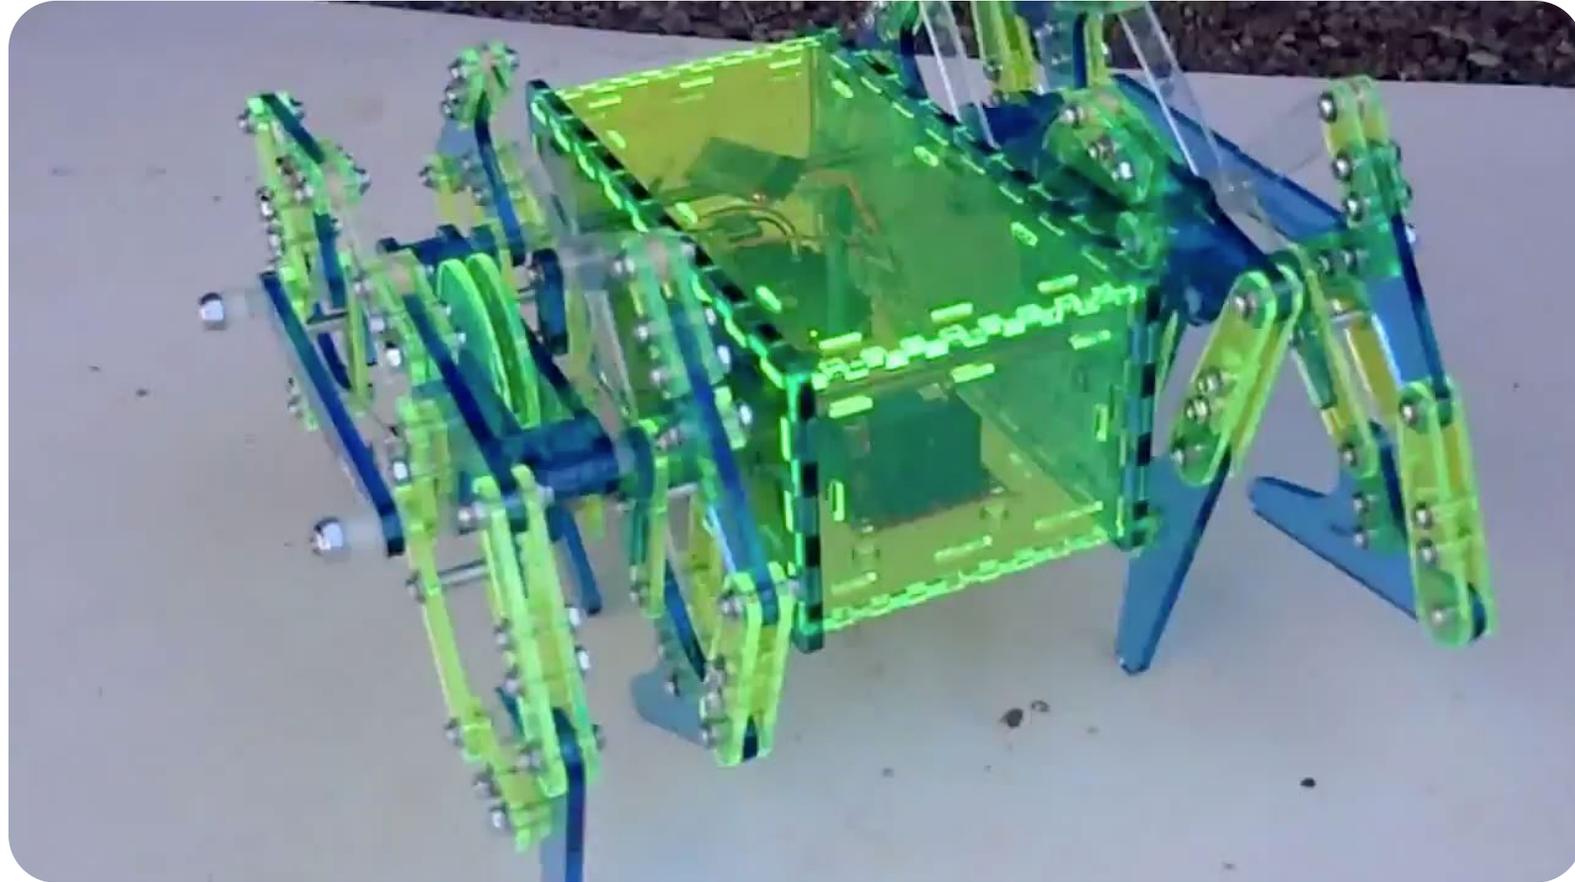

# **CO2 laser cutter types**

**industrial** laser cutter  
\$20k - 50k

(we have 2 in the makerspace)




**consumer** laser cutters  
\$3,000 (e.g., Glowforge)



**hacker** laser cutters < \$1,000





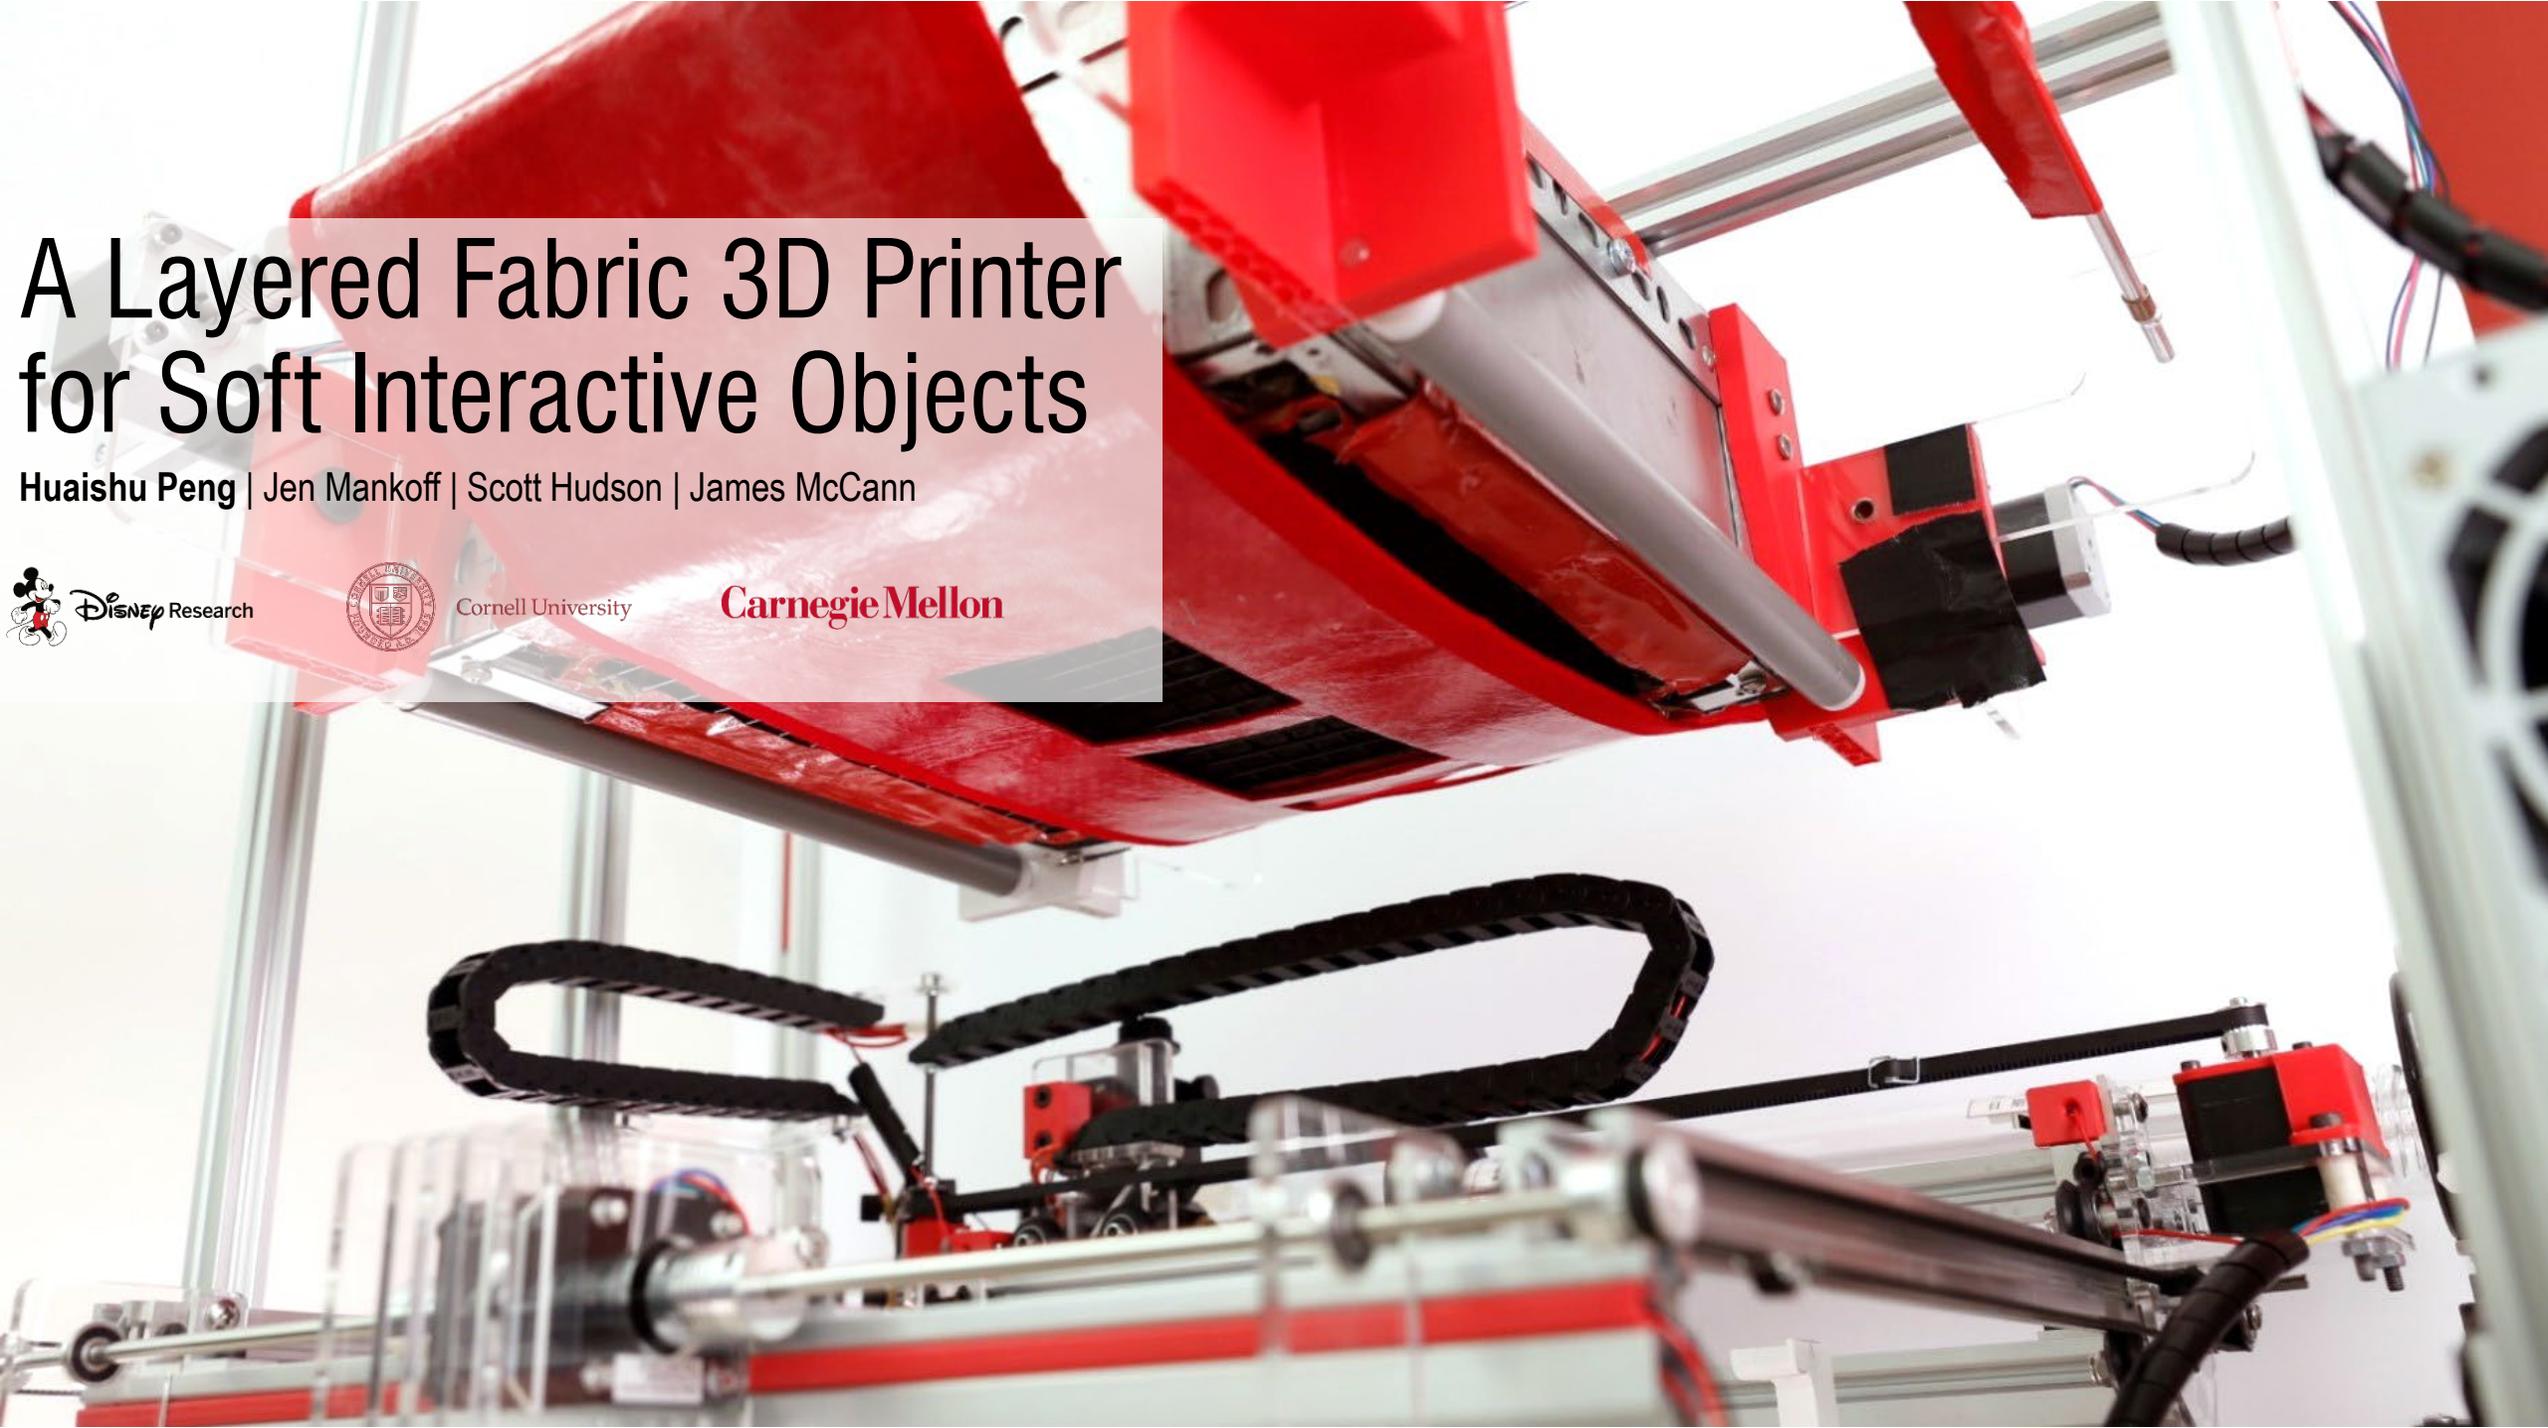

# A Layered Fabric 3D Printer for Soft Interactive Objects


Huashu Peng | Jen Mankoff | Scott Hudson | James McCann






Cornell University

Carnegie Mellon

# Printer Structure

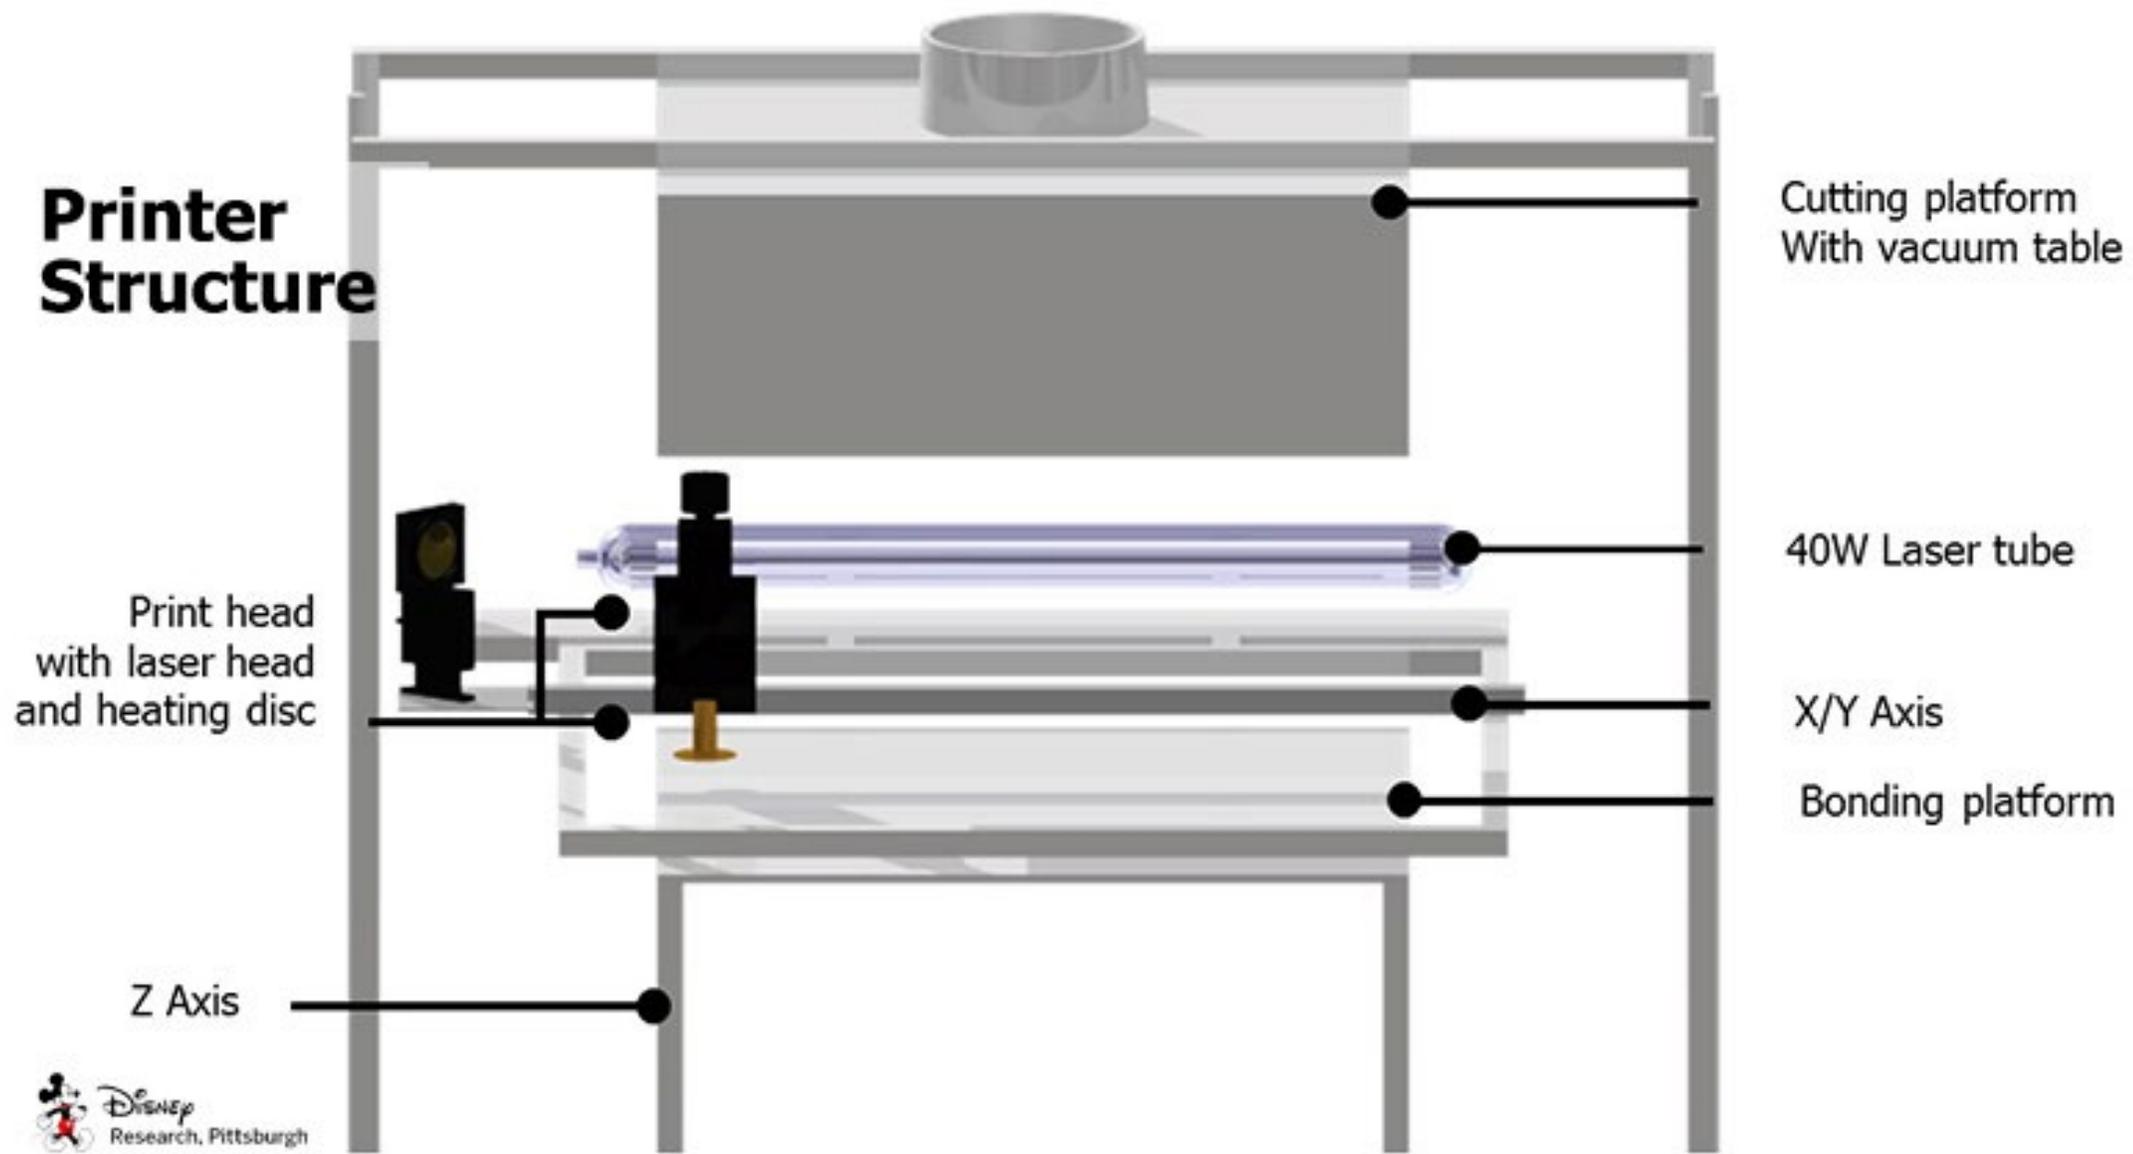

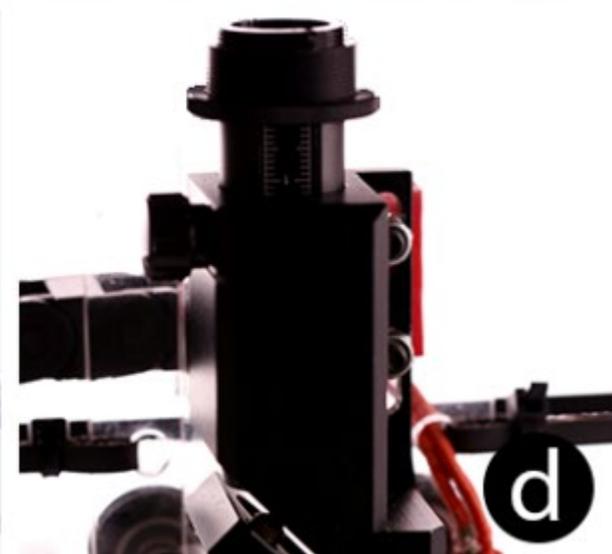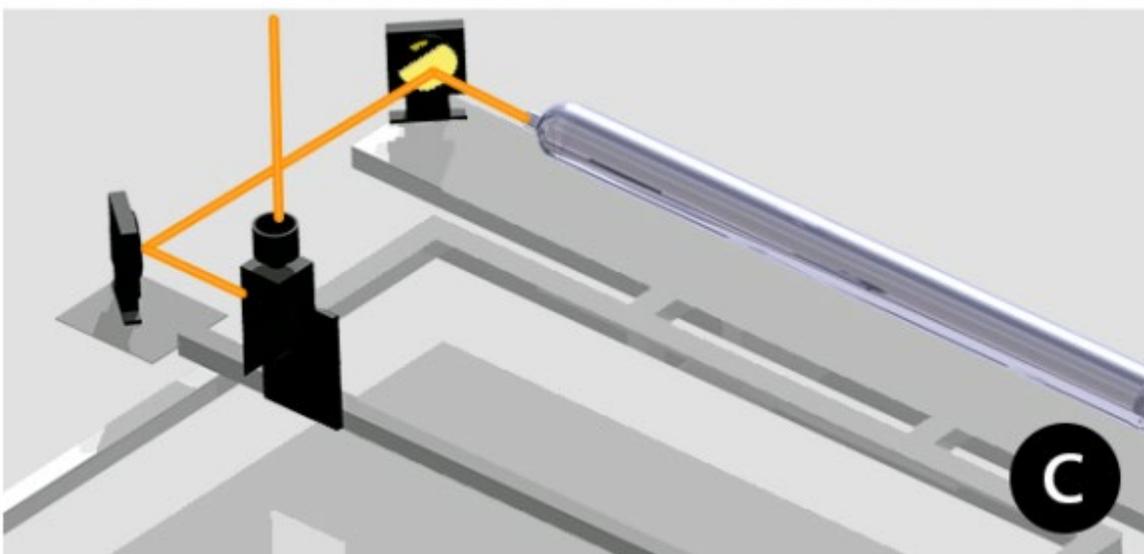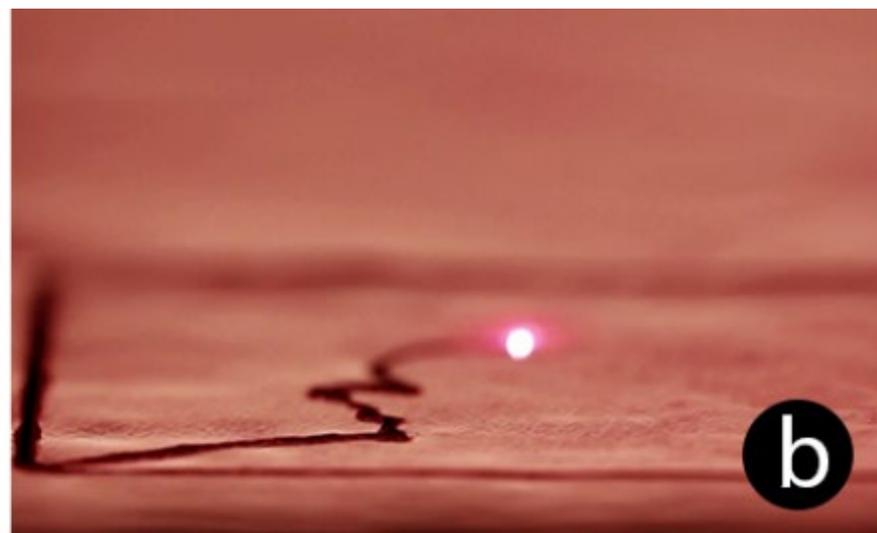



## 40W CO2 Laser Tube Machines 700mm x 50mm for Laser Engraving & Cutting

16 viewed per day Be the first to [write a review](#).

Condition: **New**

Quantity:

1

More than 10 available / [15 sold](#)

Price: **US \$100.89**

[Buy It Now](#)

[Add to cart](#)

Best Offer:

[Make Offer](#)

[Add to watch list](#)

**Free shipping**

30-day returns

Ships from United States

**Bucks** You'll earn **\$1.01** in eBay Bucks. [See conditions](#)

Shipping: **FREE** Standard Shipping | [See details](#)

Item location: Dayton, New Jersey, United States

Ships to: United States [See exclusions](#)

Delivery: Estimated between **Fri. Apr. 12** and **Tue. Apr. 16** to 14850


Payments:



**PayPal CREDIT**


No Interest if paid in full in 6 months on \$99+. [Apply Now](#) | [See terms](#)



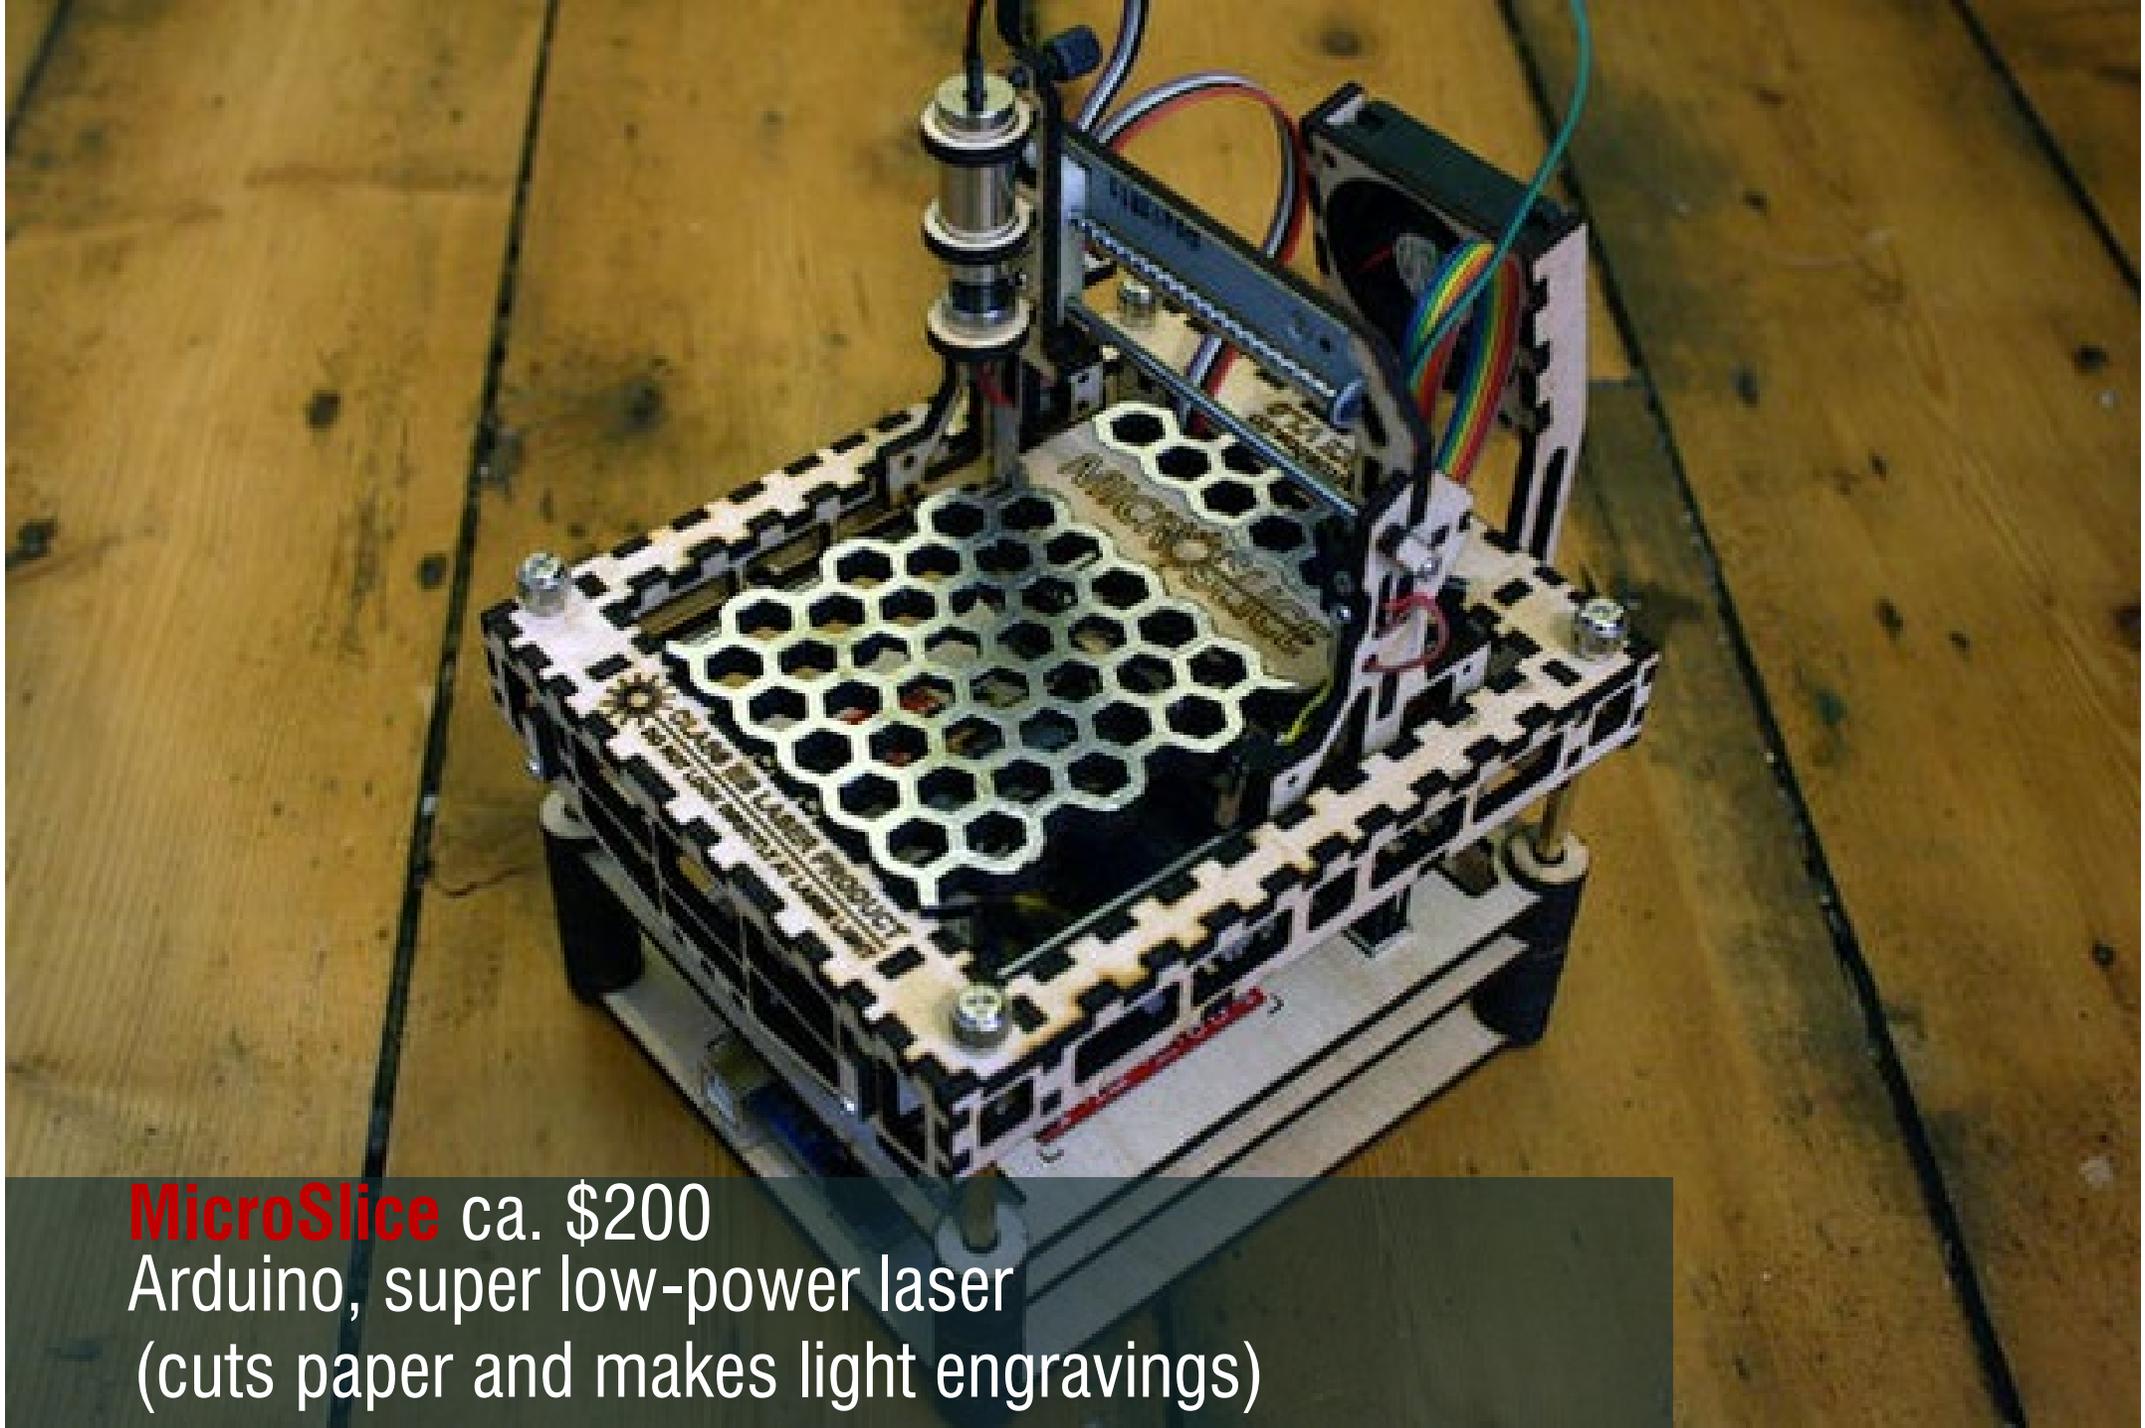

**MicroSlice** ca. \$200  
Arduino, super low-power laser  
(cuts paper and makes light engravings)

**Customize control for laser cutters**

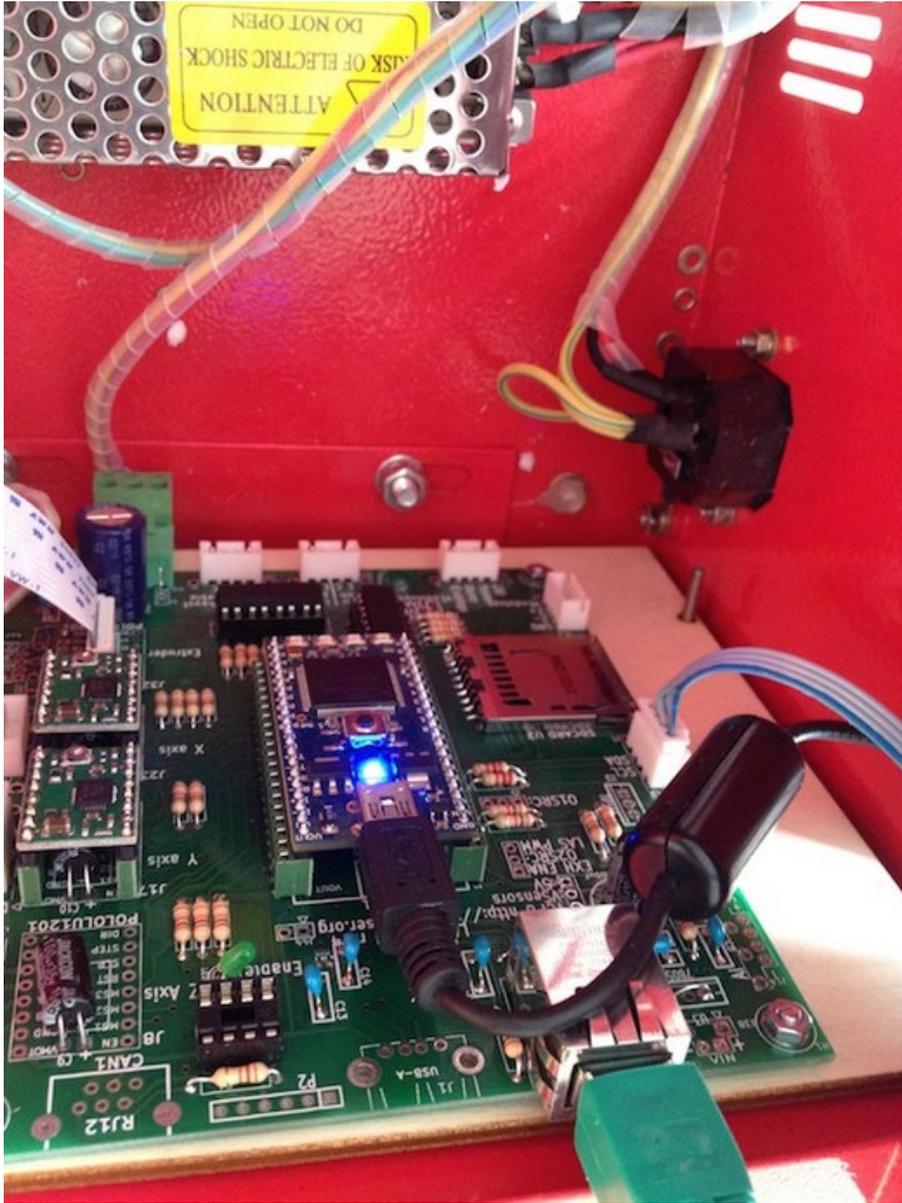


**LAOS board**  
(open source controller board)

<https://redmine.laoslaser.org/projects/laos/wiki/SimpleCode>

# gcode::

most widely used **programming language** for controlling industrial machines such as mills, lathes and cutters as well as 3D-printers

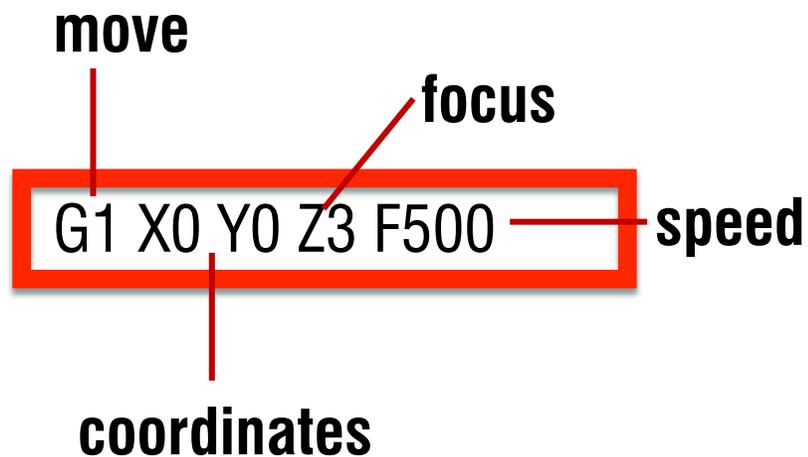

**That's also how we control 3D printers**



draw on the workpiece  
with a laser pointer



polyline

### Interactive Construction: Interactive Fabrication of Functional Mechanical Devices

Stefanie Mueller, Pedro Lopes, and Patrick Baudisch  
Hasso Plattner Institute, Potsdam, Germany  
{stefanie.mueller, pedro.lopes, patrick.baudisch}@hpi.uni-potsdam.de

**ABSTRACT**

Personal fabrication tools, such as laser cutters and 3D printers allow users to create precise objects quickly. However, working through a CAD system removes users from the workpiece. Recent interactive fabrication tools reintroduce this directness, but at the expense of precision.

In this paper, we introduce *constructable*, an interactive drafting table that produces precise physical output in every step. Users interact by drafting directly on the workpiece using a hand-held laser pointer. The system tracks the pointer, beautifies its path, and implements its effect by cutting the workpiece using a fast high-powered laser cutter.

*Constructable* achieves precision through tool-specific constraints, user-defined sketch lines, and by using the laser cutter itself for all visual feedback, rather than using a screen or projection. We demonstrate how *Constructable* allows creating simple but functional devices, including a simple gearbox, that cannot be created with traditional interactive fabrication tools.

**Author Keywords:** interactive fabrication; laser cutting; rapid prototyping; sketching; construction; mechanics.

**ACM Classification Keywords:** H5.2 [Information interfaces and presentation]: User Interfaces. - Graphical user interfaces.

**General Terms:** Design; Human Factors.

**INTRODUCTION**

Rapid prototyping/personal fabrication tools, such as 3D printers and computer controlled milling machines help users create one-off prototypes rapidly.

The process places CAD software at the front-end to per-



Figure 1: (a) *Constructable* users interact by drafting directly on the workpiece with hand-held lasers. (b) Here the user sketches a finger joint across two objects (c) The system responds by cutting the desired joint using the cutting laser. (d) *Constructable* allows creating precise & functional mechanical objects, such as this simple motorized vehicle.


(3) *Precision:* constructions aids, such as constraints allow users to precisely manufacture pieces that can perform mechanical functions.

On the flipside, the transition from traditional tools to personal fabrication tools means that all editing is now done on a computer screen, which removes users from the workpiece and prevents users from refining their design interactively along the way [31].

UIST 2012


Mueller et.al.

**advanced tricks  
with defocused laser**

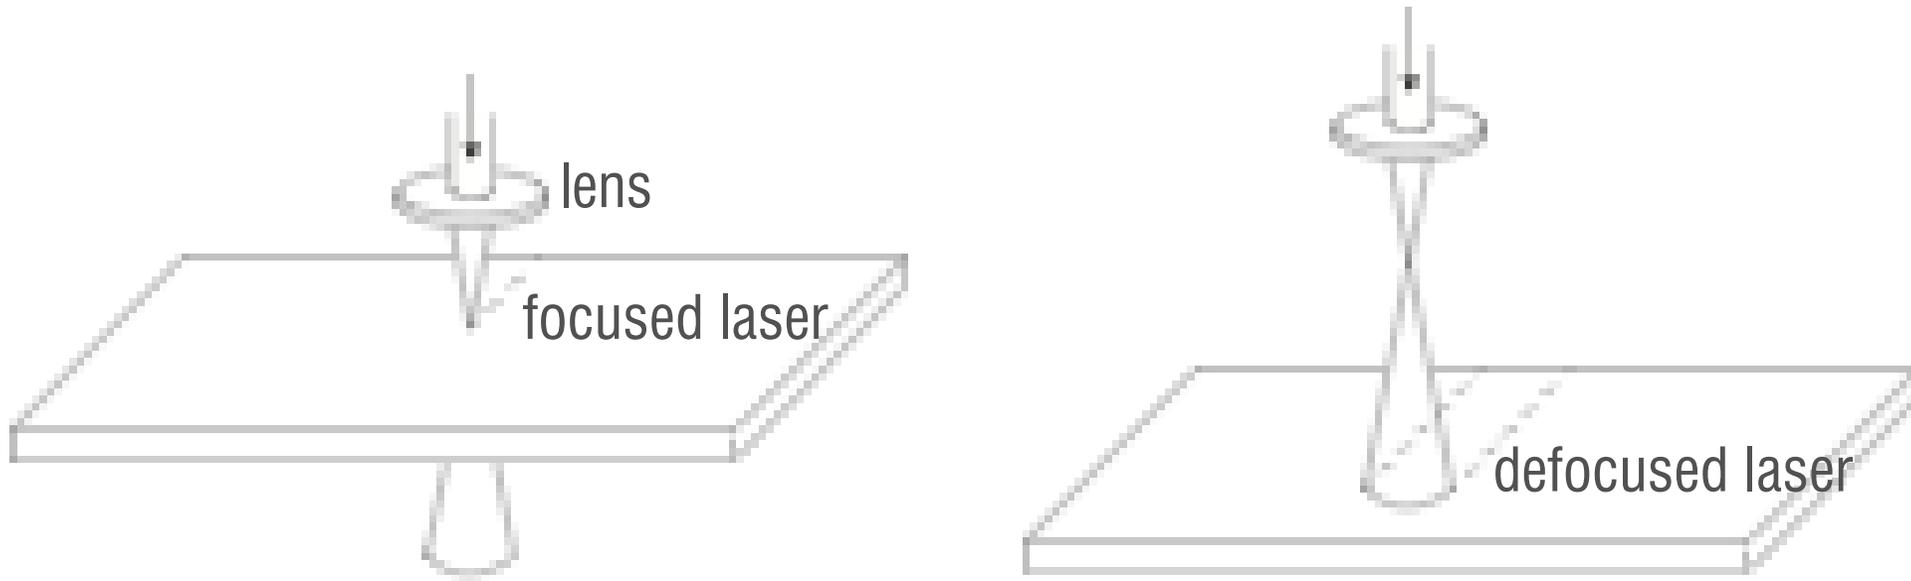


To cut-through we need to have the laser focused to the top surface of the material

Any benefit of defocusing a laser?

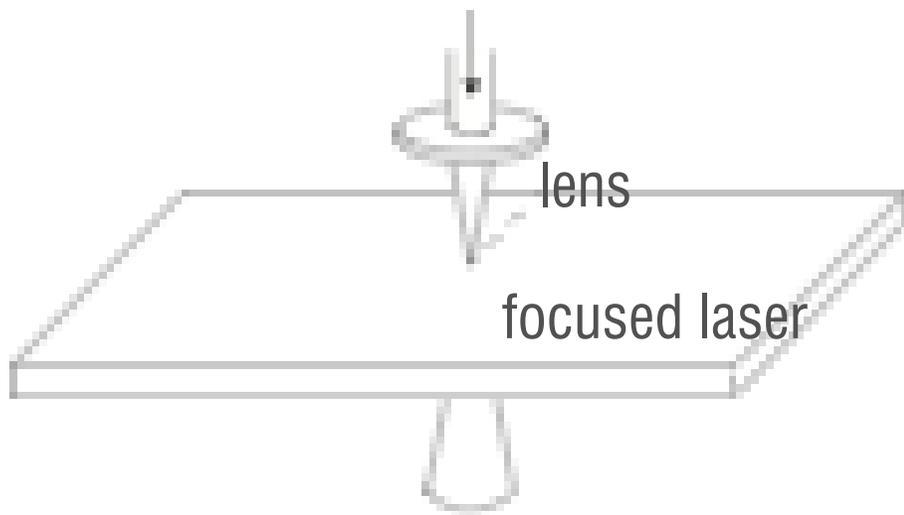

**laser cutting**

->

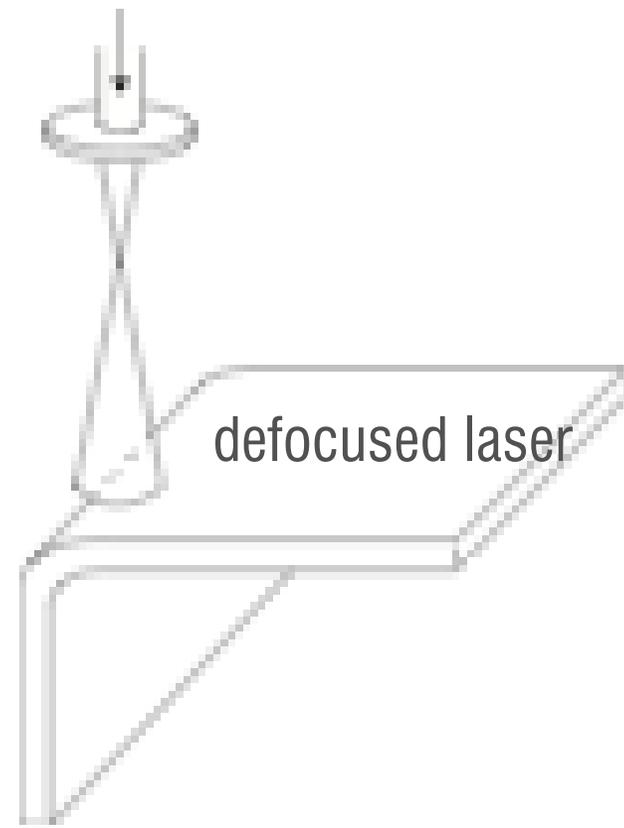

**laser bending**

3x







Session: Fabrication

CHI 2013: Changing Perspectives, Paris, France

## LaserOrigami: Laser-Cutting 3D Objects

Stefanie Mueller, Bastian Kruck, and Patrick Baudisch

Hasso Plattner Institute, Potsdam, Germany

{stefanie.mueller, bastian.kruck, patrick.baudisch}@hpi.uni-potsdam.de

### ABSTRACT

We present LaserOrigami, a rapid prototyping system that produces 3D objects using a laser cutter. LaserOrigami is substantially faster than traditional 3D fabrication techniques such as 3D printing and unlike traditional laser cutting the resulting 3D objects require no manual assembly. The key idea behind LaserOrigami is that it achieves three-dimensionality by folding and stretching the workpiece, rather than by placing joints, thereby eliminating the need for manual assembly. LaserOrigami achieves this by heating up selected regions of the workpiece until they become compliant and bend down under the force of gravity. LaserOrigami administers the heat by defocusing the laser, which distributes the laser's power across a larger surface. LaserOrigami implements cutting and bending in a single integrated process by automatically moving the cutting table up and down—when users take out the workpiece, it is already fully assembled. We present the three main design elements of LaserOrigami: the bend, the suspender, and the stretch, and demonstrate how to use them to fabricate a range of physical objects. Finally, we demonstrate an *interactive fabrication* version of LaserOrigami, a process in which user interaction and fabrication alternate step-by-step.

**Author Keywords:** rapid prototyping; laser cutting; interactive fabrication; 3D; physical prototyping.

**ACM Classification Keywords:** H5.2 [Information interfaces and presentation]; User Interfaces.

**General Terms:** Design; Human Factors.


© 2013 www.stefanienmueller.com. ON



Figure 1: LaserOrigami fabricates 3D structure by bending, rather than using joints, thereby eliminating the need for manual assembly. Here it fabricates a mobile phone screen cam by (a) cutting the contour lines and (b) heating up the bend paths until the material




CHI 2013

Mueller et al.

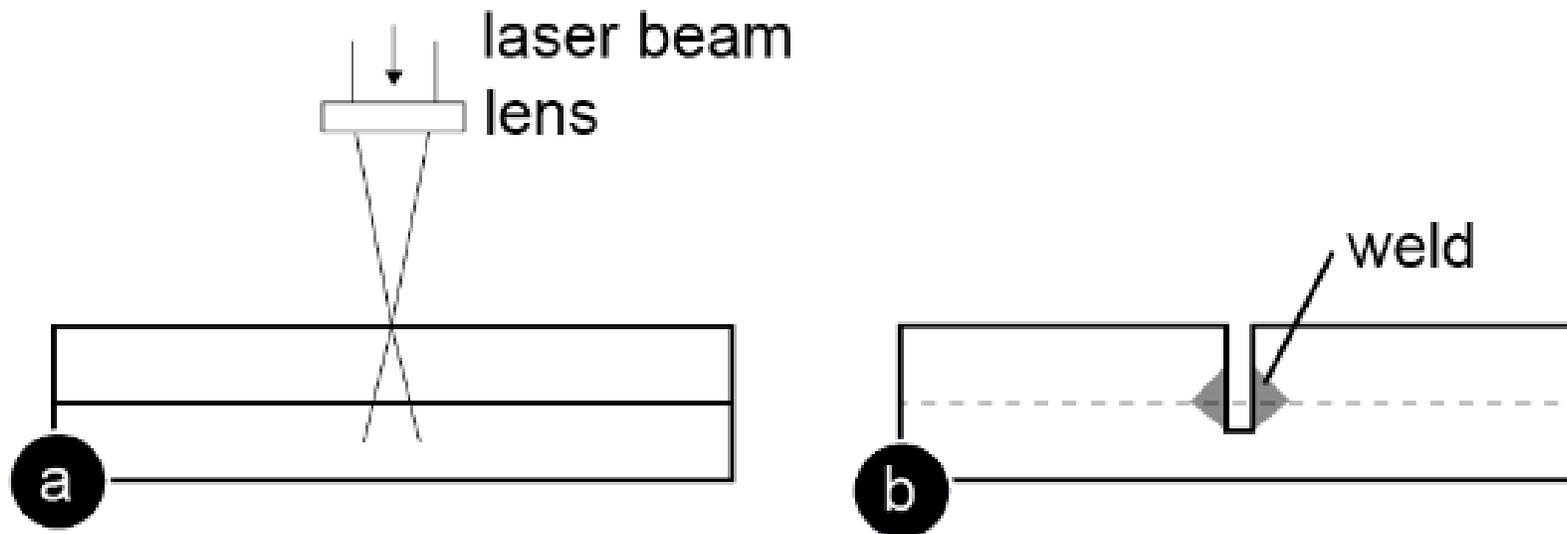

Using defocused laser to bond layers of acrylics for prototyping

## **Auto-stacking**

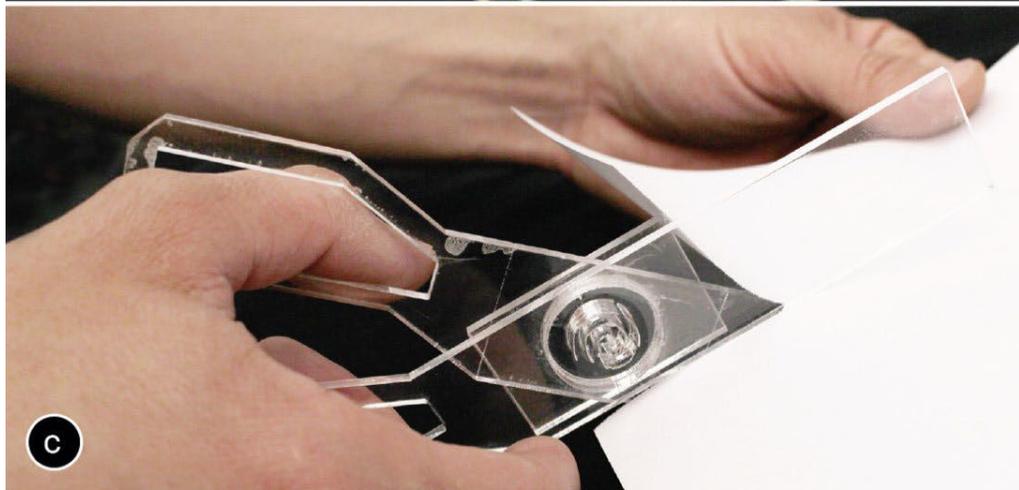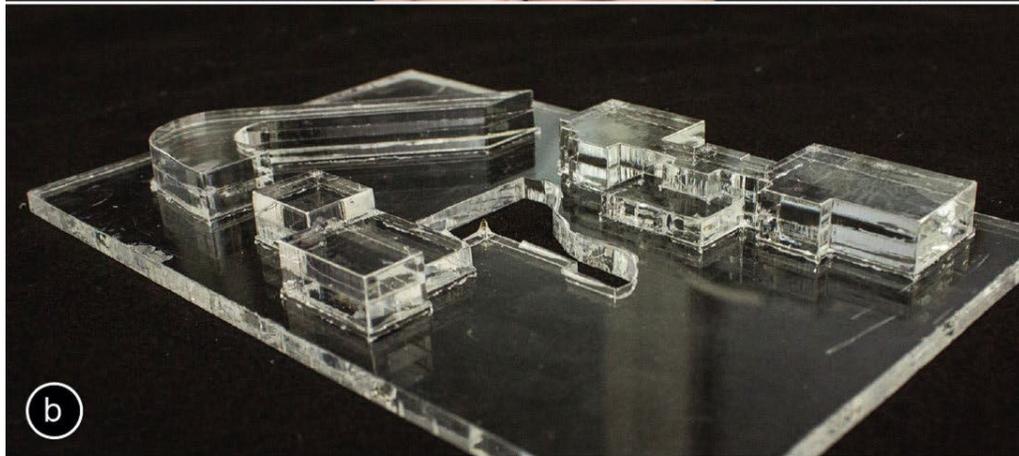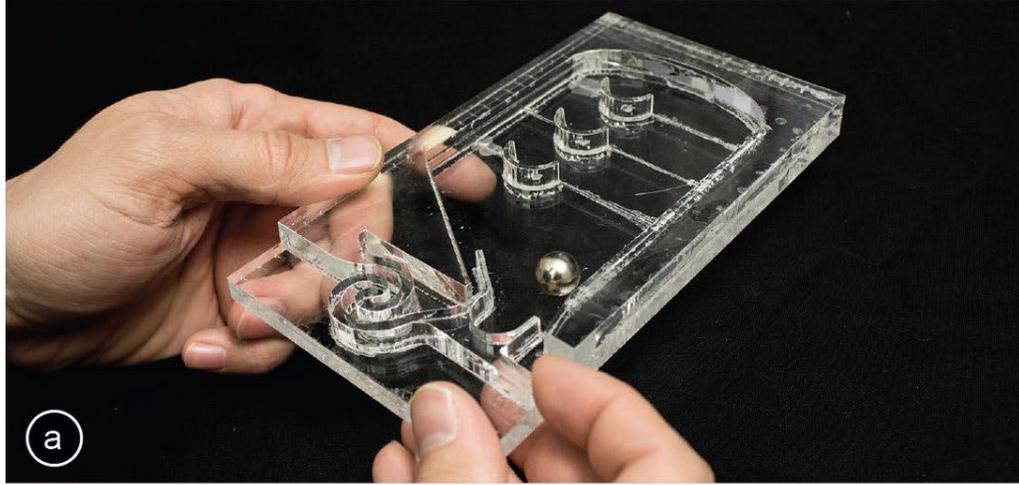



LaserStacker creates 3D objects using a new cut/weld/heal process.

### LaserStacker: Fabricating 3D Objects by Laser Cutting and Welding

Udayan Umaphathi, Hsiang-Ting Chen, Stefanie Mueller, Ludwig Wall, Anna Seufert, Patrick Baudisch  
Hasso Plattner Institute, Potsdam, Germany  
{firstname.lastname}@hpi.de

**ABSTRACT**  
Laser cutters are useful for rapid prototyping because they are fast. However, they only produce planar 2D geometry. One approach to creating non-planar objects is to cut the object in horizontal slices and to stack and glue them. This approach, however, requires manual effort for the assembly and time for the glue to set, defeating the purpose of using a fast fabrication tool.

We propose eliminating the assembly step with our system *LaserStacker*. The key idea is to use the laser cutter to not only cut but also to *weld*. Users place not one acrylic sheet, but a stack of acrylic sheets into their cutter. In a single process, *LaserStacker* cuts each individual layer to shape (through all layers above it), *welds* layers by melting material at their interface, and *heals* undesired cuts in higher layers. When users take out the object from the laser cutter, it is already assembled.

To allow users to model stacked objects efficiently, we built an extension to a commercial 3D editor (*SketchUp*) that provides tools for defining which parts should be connected and which remain loose. When users hit the *export* button, *LaserStacker* converts the 3D model into cutting, welding, and healing instructions for the laser cutter.

We show how *LaserStacker* not only allow making static objects, such as architectural models, but also objects with moving parts and simple mechanisms, such as scissors, a simple pinball machine, and a mechanical toy with gears.

**Author Keywords:** rapid prototyping; laser cutting.  
**ACM Classification Keywords:** H5.2 [Information interfaces and presentation]: User interfaces.

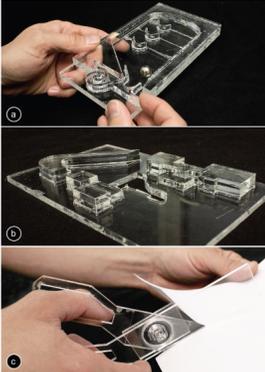



Figure 1: *LaserStacker* produces laser cut objects consisting of multiple layers of acrylic without requiring manual assembly: It assembles the object by not only cutting with the laser but

UIST 2015

Umaphathi et.al.

**Other methods to create 3(2.5)D shape with laser cutter?**



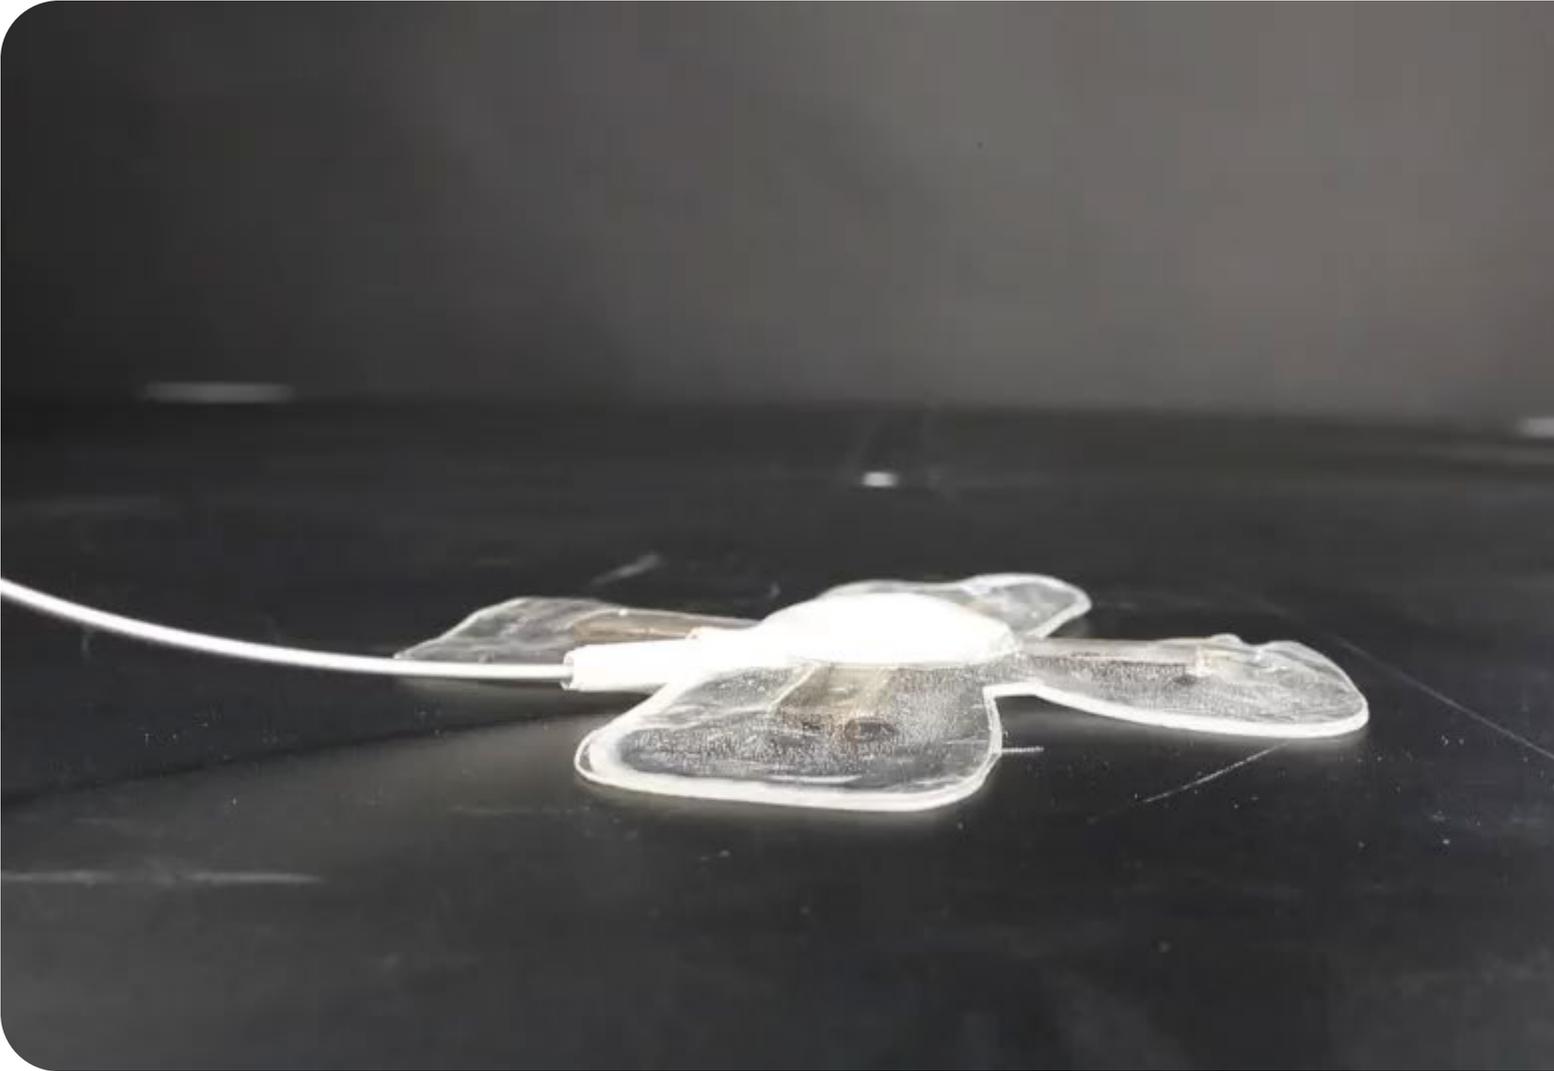

## BlowFab: Rapid Prototyping for Rigid and Reusable Objects using Inflation of Laser-cut Surfaces

**Junichi Yamaoka**  
Keio University  
Fujisawa, Japan  
yamajun@sfc.keio.ac.jp

**Ryuma Niiyama**  
The University of Tokyo  
Tokyo, Japan  
niiyama@isi.imi.i.u-  
tokyo.ac.jp

**Yasunaki Kakehi**  
Keio University  
Fujisawa, Japan  
ykakehi.keio.ac.jp

### ABSTRACT

This study proposes BlowFab, a prototyping method used to create a 2.5-dimensional prototype in a short time by combining laser cutting and blow molding techniques. The user creates adhesive areas and inflatable areas by engraving and cutting multilayered plastic sheets using a laser cutter. These adhesive areas are fused automatically by overlapping two crafted sheets and softening them with a heater. The user can then create hard prototypes by injecting air into the sheets.

Objects can be bent in any direction by cutting incisions or engraving a resistant resin. The user can create uneven textures by engraving a pattern with a heat-resistant film. These techniques can be used for prototyping various strong inflatable objects. The finished prototype is strong and can be collapsed readily for storage when not required.

In this study, the design process is described using the proposed method. The study also evaluates possible bending mechanisms and texture expression methods along with various usage scenarios and discusses the resolution, strength, and reusability of the prototype developed.

### ACM Classification Keywords

H5.2. Information Interfaces and Presentation; User Interfaces.

### Author Keywords

Fabrication; Prototyping/Implementation; Creativity Support; Smart materials.

### INTRODUCTION

Inflatable membrane structures such as temporary buildings and portable kayaks are widely used owing to their light weight and portability. These structures derive their strength from the internal pressure of air against their membranes. In the recent past, several studies of soft robotics and shape changing interfaces of human-computer interaction (HCI) have proposed techniques for creating inflatable

three-dimensional (3D) objects using soft materials such as silicone rubber [21, 13]. These techniques can be used to create programmable shapes, such as soft actuators and temporary furniture, by injecting air into flat objects. Large objects such as temporary houses are flattened or made compact after use. Because these products are made of soft elastic materials such as rubber, it is necessary to continue to pump air into the products to maintain their shape. In addition, there is a risk of air escaping from even a small hole, making the structure unusable. Detecting these tiny holes can be challenging. This risk also reduces their potential usage in even slightly tough environments and terrains.

Blow molding, which is a manufacturing method used to make plastic bottles, can be used to produce a hard product by injecting air into a thermo-reversible resin capsule. This method is flexible and the shape of the object can be changed freely when the material is heated and softened. However, a mold is necessary when making an object using blow molding.

Therefore, we propose BlowFab, which combines the blow molding technology using a thermo-reversible resin, the technology used for making inflatable products, and rapid digital fabrication technology to create hard inflatable products. BlowFab can be used to create a 3D prototype in a short time by combining laser cutting and blow molding techniques. The user begins by creating adhesive and inflatable areas by engraving and cutting multilayered plastic sheets using a laser cutter. Two such cutout sheets are softened using a heater (or a heat gun) and placed together. The adhesive areas are fused automatically, leaving the space for inflation. The user can create hard prototypes by injecting air into the sheets. The objects can be bent in any direction by making a specially designed cutting pattern or engraving a resistant resin. The user can even create uneven textures by engraving a pattern with a heat-resistant film. These techniques can be used for prototyping various strong inflatable and reusable objects (Figure 1).

**UIST 2018**

Yamaoka et.al.

Remember the **fiber laser** I mentioned earlier?



## Fibercuit: Prototyping High-Resolution Flexible and Kirigami Circuits with a Fiber Laser Engraver

Zeyu Yan\*  
zeyuy@umd.edu  
Department of Computer Science,  
University of Maryland, College Park  
College Park, MD, USA

Anup Sathya\*  
anupsat@umd.edu  
Department of Computer Science,  
University of Maryland, College Park  
College Park, MD, USA

Sahra Yusuf  
fyusuf4@gmu.edu  
George Mason University  
Fairfax, VA, USA

Jyh-Ming Lien  
jmlen@gmu.edu  
George Mason University  
Fairfax, VA, USA

Huaishu Peng  
huaishu@umd.edu  
Department of Computer Science,  
University of Maryland, College Park  
College Park, MD, USA




Figure 1: Fibercuit overview. a) Our fiber laser engraver setup with a custom rotary table. b) Cutting the conductive layer on our custom composite using the fiber laser. c) A kirigami flower circuit that can function as an Arduino. d) A custom stretchable flex cable. e) A kirigami crane with a battery holder and 2 LEDs.

### ABSTRACT

Prototyping compact devices with unique form factors often requires the PCB manufacturing process to be outsourced, which can be expensive and time-consuming. In this paper, we present Fibercuit, a set of rapid prototyping techniques to fabricate high-resolution, flexible circuits on-demand using a fiber laser engraver. We showcase techniques that can laser cut copper-based composites to form fine-pitch conductive traces, laser fold copper substrates that can form kirigami structures, and laser solder surface-mount electrical components using off-the-shelf soldering pastes. Combined with our software pipeline, an end user can design and fabricate flexible circuits which are dual-layer and three-dimensional, thereby exhibiting a wide range of form factors. We demonstrate Fibercuit by showcasing a set of examples, including a custom dice, flex cables, custom end-stop switches, electromagnetic coils, LED earrings and a circuit in the form of kirigami crane.

\*Both authors contributed equally to this research.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or to republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).  
IST '22, October 29–November 2, 2022, Bend, OR, USA  
© 2022 Association for Computing Machinery.  
ACM ISBN 978-1-4503-9329-1/22/10...\$15.00  
<https://doi.org/10.1145/3526113.3545652>

### CCS CONCEPTS

• Human-centered computing → Interactive systems and tools; Interaction devices • Hardware → Printed circuit boards.

### KEYWORDS


fiber laser, laser cut, PCB, circuit board, kirigami, flexible PCB

### ACM Reference Format:


Zeyu Yan, Anup Sathya, Sahra Yusuf, Jyh-Ming Lien, and Huaishu Peng. 2022. Fibercuit: Prototyping High-Resolution Flexible and Kirigami Circuits with a Fiber Laser Engraver. In *The 35th Annual ACM Symposium on User Interface Software and Technology (UIST '22)*, October 29–November 2, 2022, Bend, OR, USA. ACM, New York, NY, USA, 13 pages. <https://doi.org/10.1145/3526113.3545652>

### 1 INTRODUCTION


In the ongoing effort to weave computing into our daily lives [49], designing smart devices has been a major research focus in HCI. As these devices aim to discretely recede into the environment or onto the user's body, they usually possess small and unconventional form factors. Building and prototyping such devices requires multiple rounds of iterative design to successfully integrate the function into the form. While the consumerization of 3D printers and laser cutters has shortened the iteration cycle, this advancement has been largely withheld from the PCB design and manufacturing process. Due to their flexibility and convenience, breadboards are still the most popular method to quickly prototype circuits. Apart from requiring bulky breakout boards for all surface-mounted components (SMD),

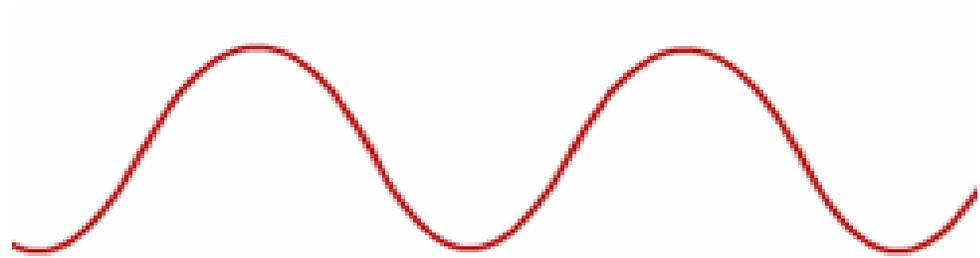


CO<sub>2</sub> laser  
10600 nm

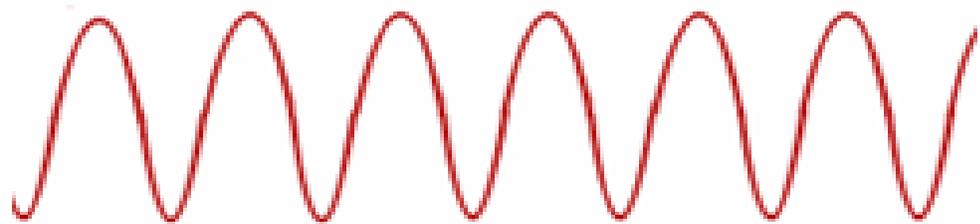


fiber laser  
1064 nm

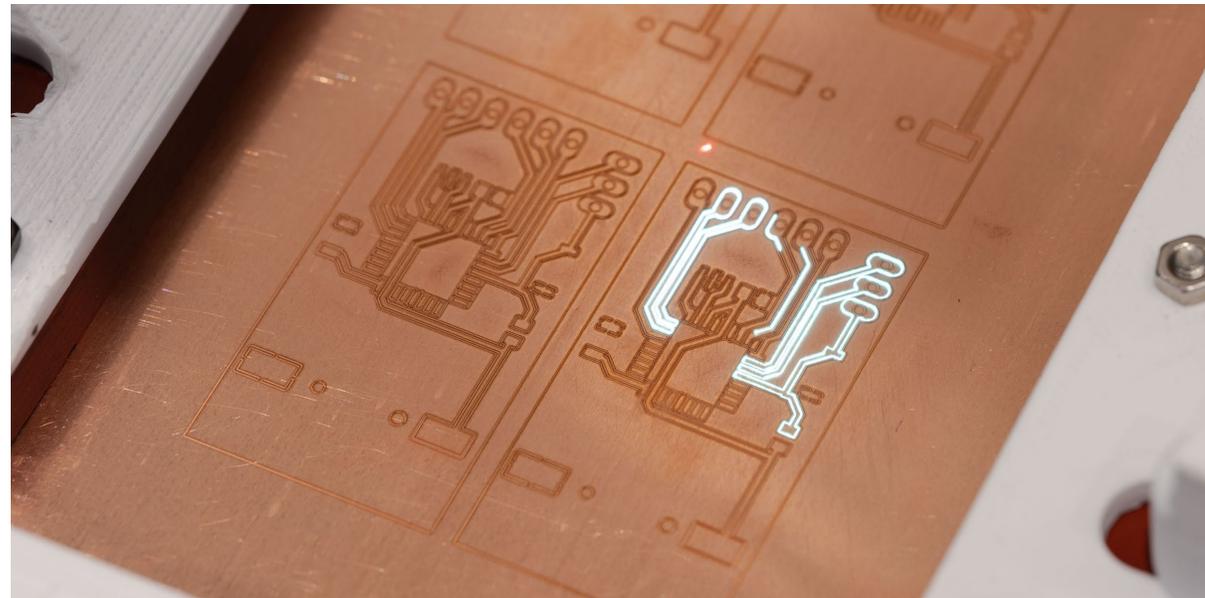

Cutting the Outline of  
the Traces and the Isolating Area.

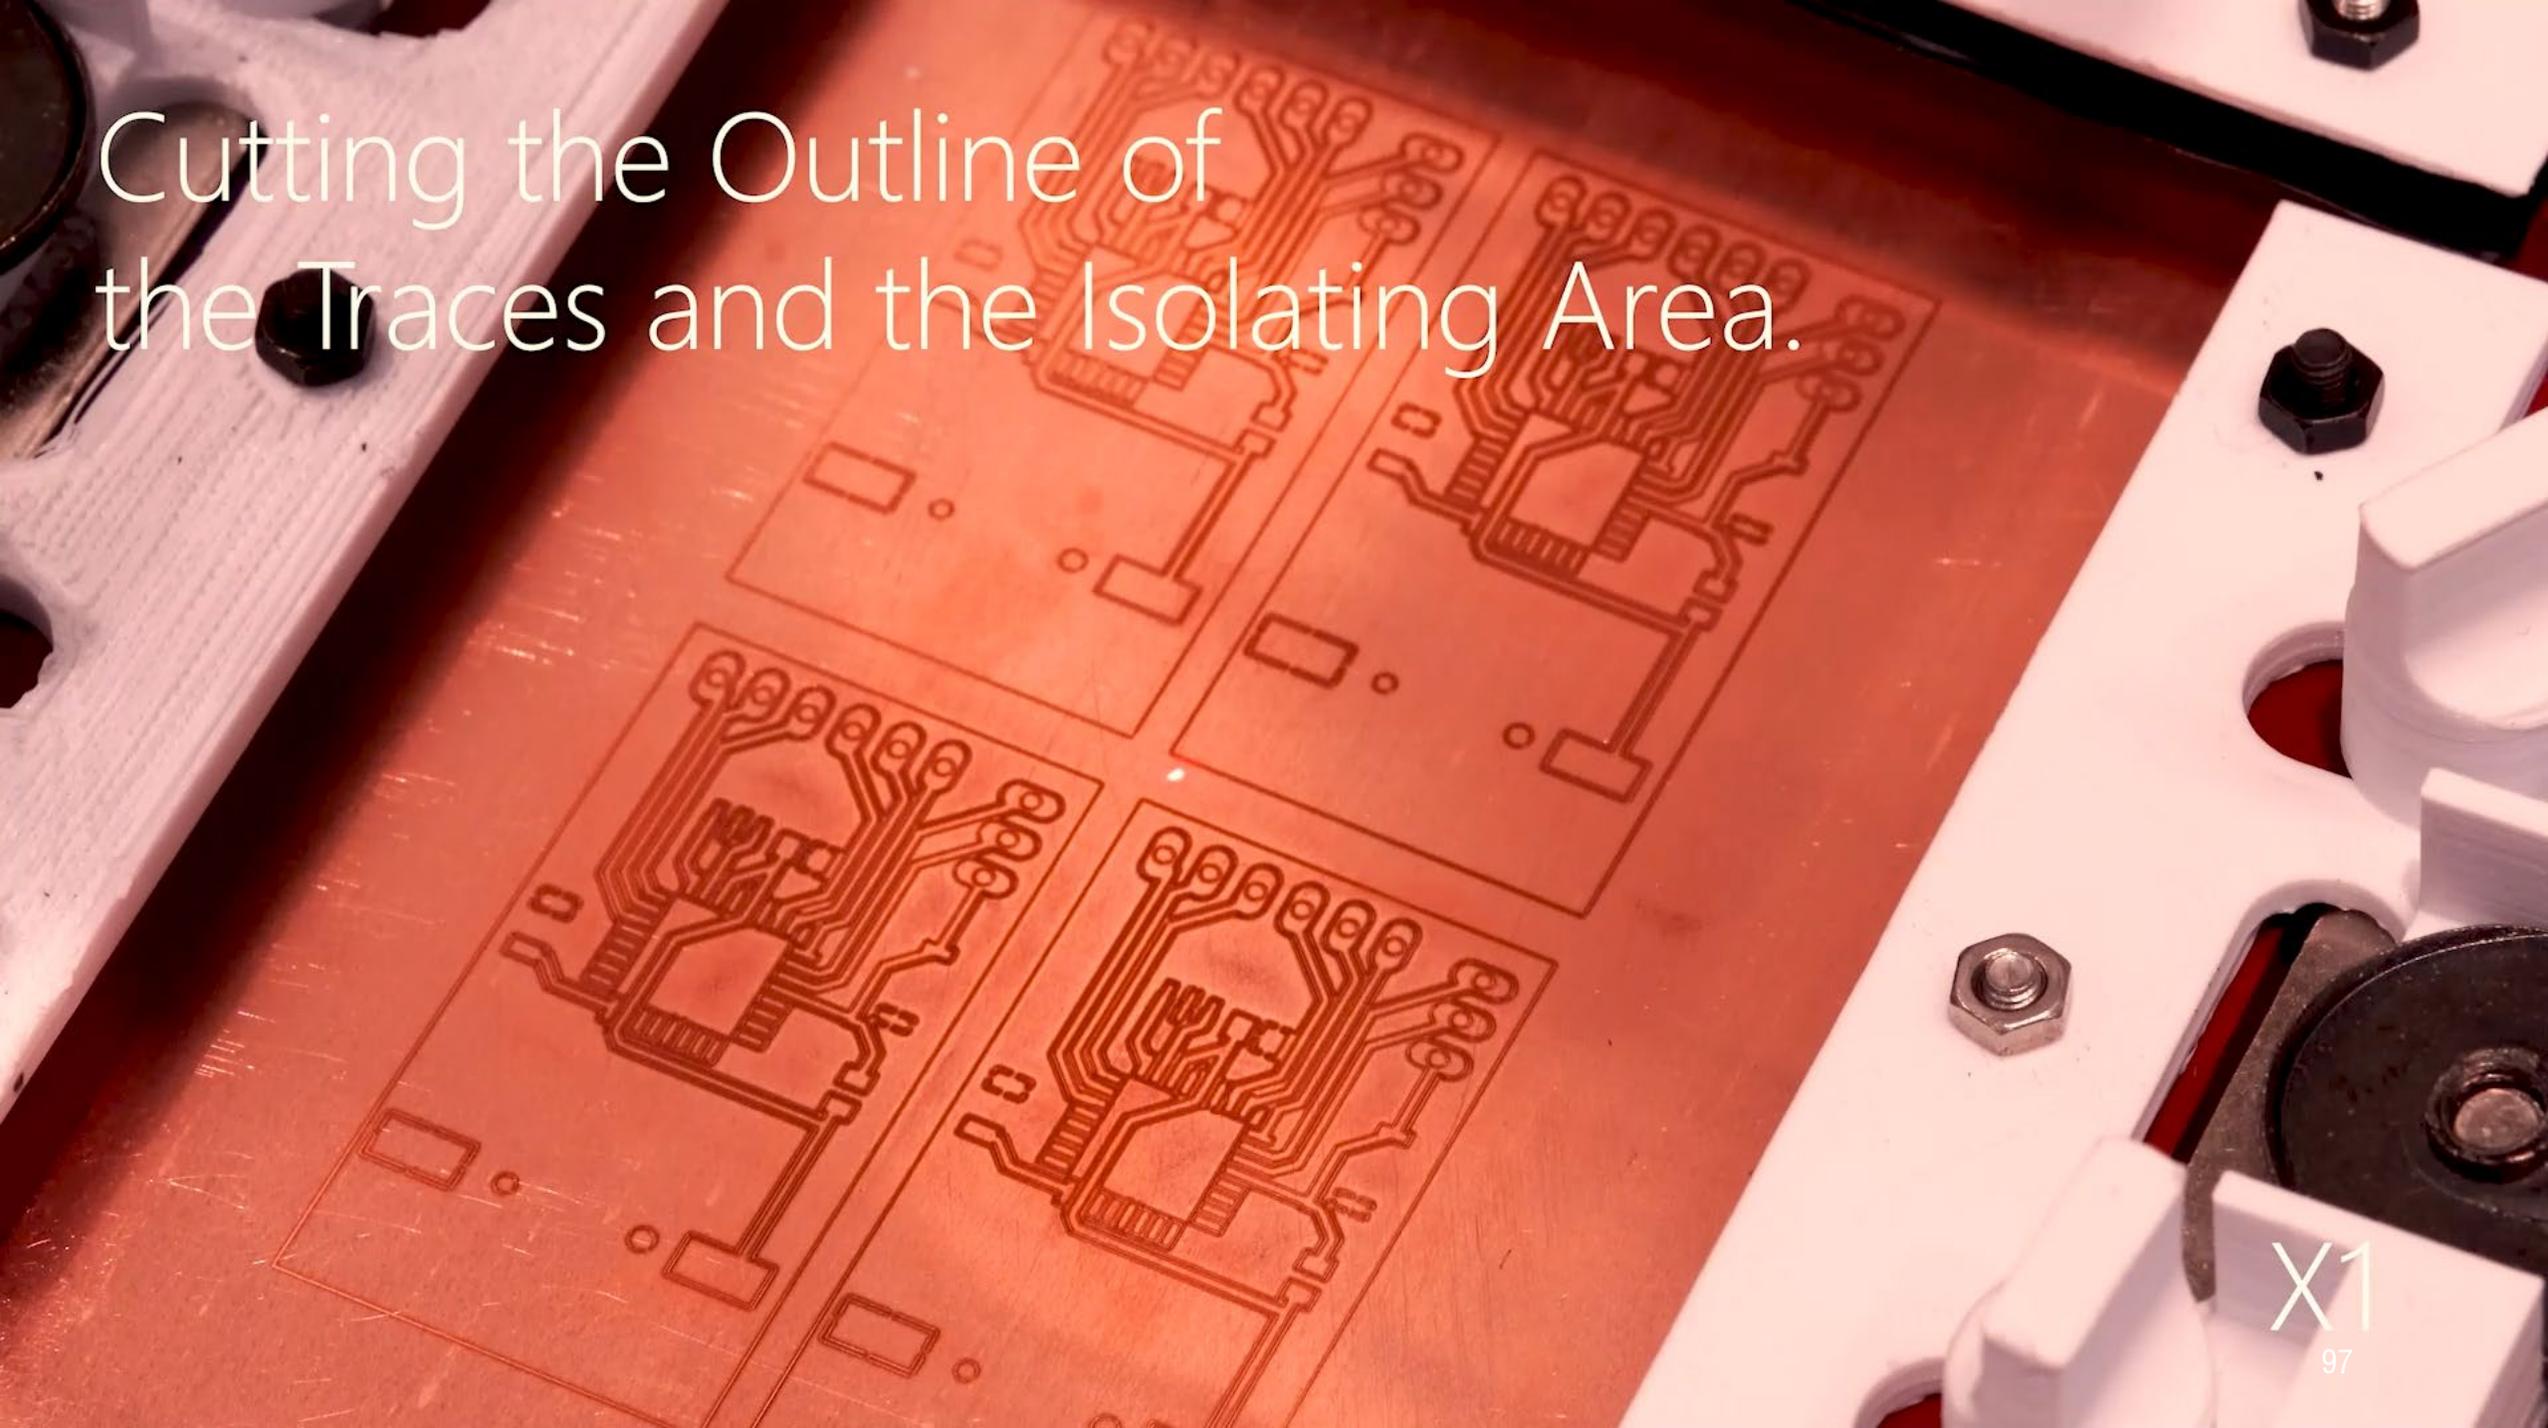

# Fibercuit

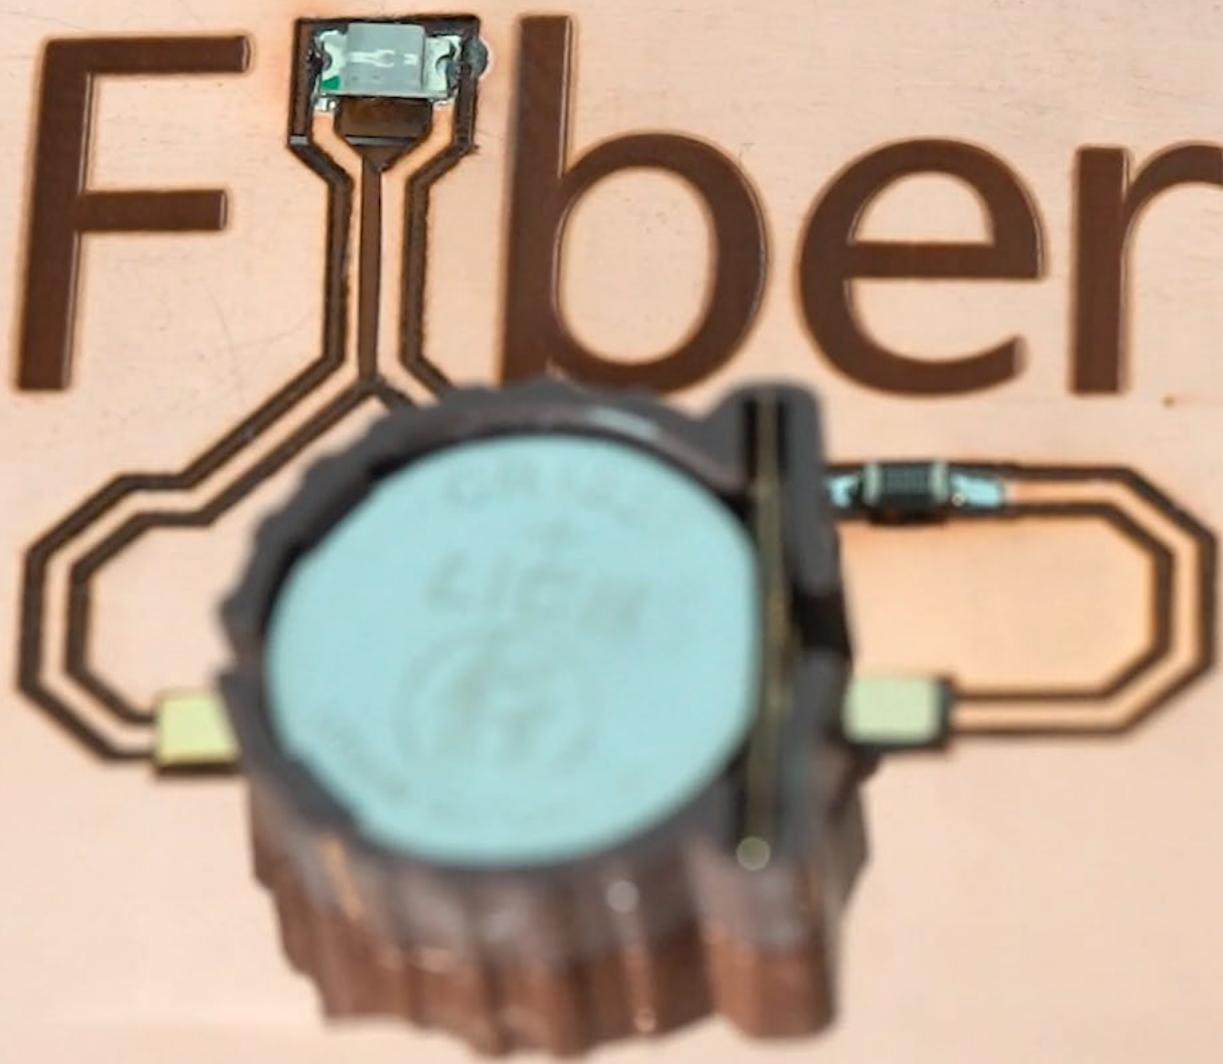

create outline

Tools


- draw regular polygon
- change fold angle
- load component
- draw circuit trace

Settings

- change grid spacing
- reset view

Close Controls

Examples

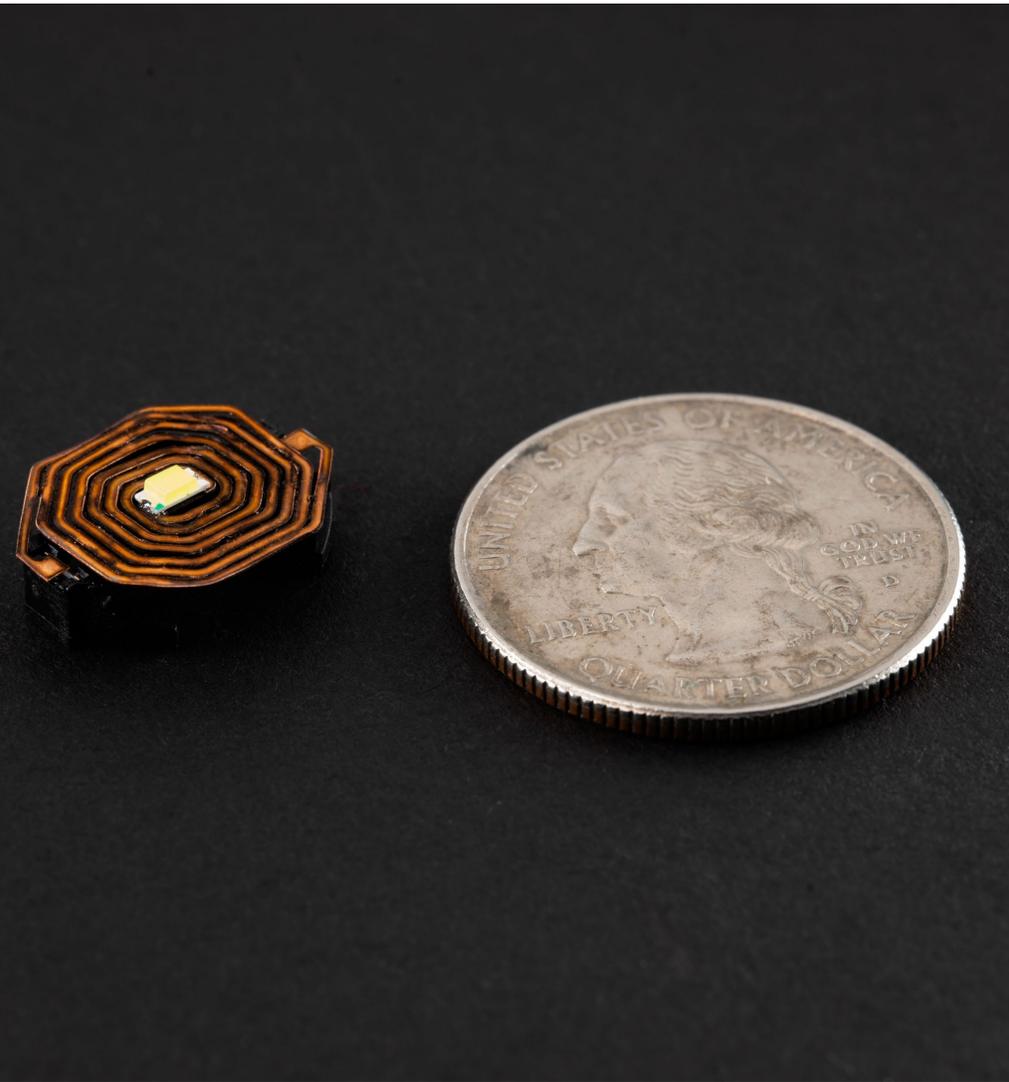



laser features #1

## Raster engraving

laser features #2

## Vector engraving/cutting

laser features #3


## Joints - creating 3D objects

laser features #4

## bending

laser features #5

## moving parts

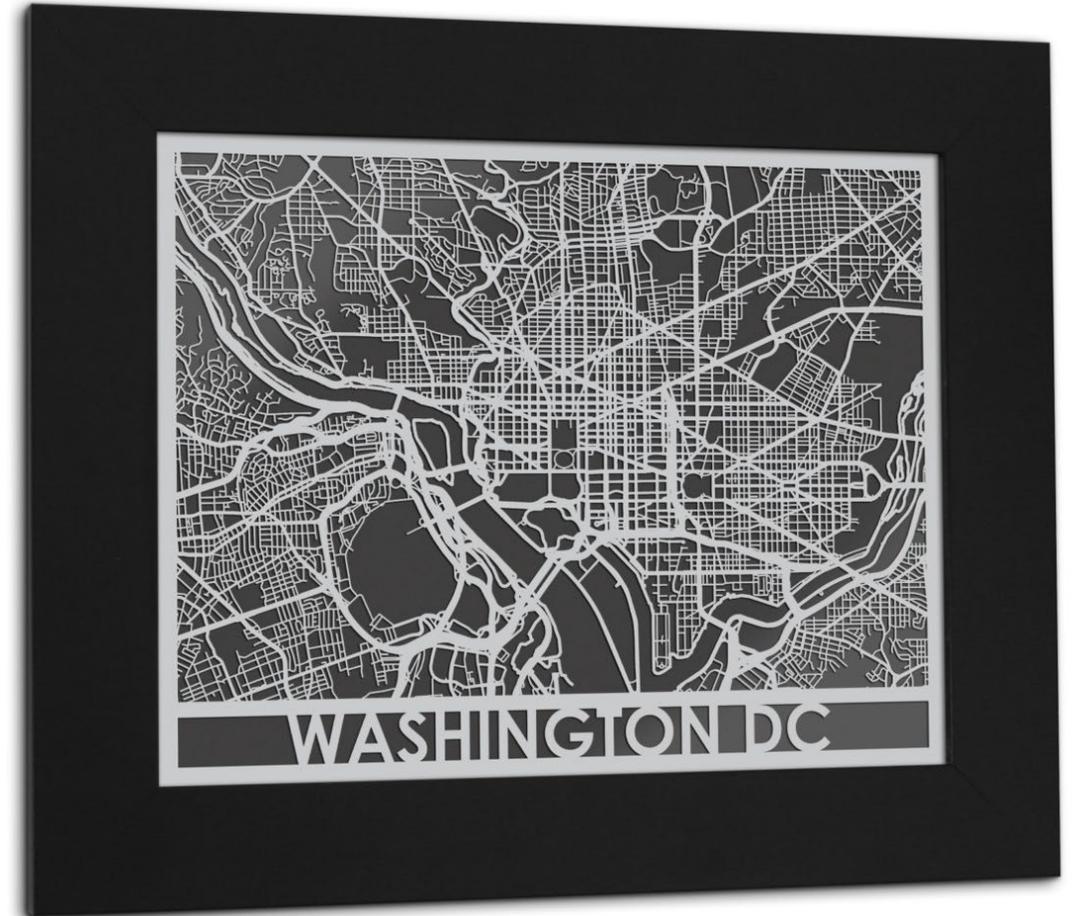

# Optional readings

## Fibercuit: Prototyping High-Resolution Flexible and Kirigami Circuits with a Fiber Laser Engraver

Zeyu Yan\*  
zeyuy@umd.edu  
Department of Computer Science,  
University of Maryland, College Park  
College Park, MD, USA

Anup Sathya\*  
anupsat@umd.edu  
Department of Computer Science,  
University of Maryland, College Park  
College Park, MD, USA

Sahra Yusuf  
fyusuf4@gmu.edu  
George Mason University  
Fairfax, VA, USA

Jyh-Ming Lien  
jmlien@gmu.edu  
George Mason University  
Fairfax, VA, USA

Huaishu Peng  
huaishu@umd.edu  
Department of Computer Science,  
University of Maryland, College Park  
College Park, MD, USA



Figure 1: Fibercuit overview. a) Our fiber laser engraver setup with a custom rotary table. b) Cutting the conductive layer on our custom composite using the fiber laser. c) A kirigami flower circuit that can function as an Arduino. d) A custom stretchable flex cable. e) A kirigami crane with a battery holder and 2 LEDs.

### ABSTRACT

Prototyping compact devices with unique form factors often requires the PCB manufacturing process to be outsourced, which can be expensive and time-consuming. In this paper, we present Fibercuit, a set of rapid prototyping techniques to fabricate high-resolution, flexible circuits on-demand using a fiber laser engraver. We showcase techniques that can laser cut copper-based composites to form fine-pitch conductive traces, laser fold copper substrates that can form kirigami structures, and laser solder surface-mount electrical components using off-the-shelf soldering pastes. Combined with our software pipeline, an end user can design and fabricate flexible circuits which are dual-layer and three-dimensional, thereby exhibiting a wide range of form factors. We demonstrate Fibercuit by showcasing a set of examples, including a custom dice, flex cables, custom end-stop switches, electromagnetic coils, LED earrings and a circuit in the form of kirigami crane.

\*Both authors contributed equally to this research.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or to republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).  
UIST '22, October 29–November 2, 2022, Bend, OR, USA  
© 2022 Association for Computing Machinery.  
ACM ISBN 978-1-4503-9320-1/22/10...\$35.00  
<https://doi.org/10.1145/3526113.3545652>

### CCS CONCEPTS

• Human-centered computing → Interactive systems and tools, Interaction devices • Hardware → Printed circuit boards.

### KEYWORDS

fiber laser, laser cut, PCB, circuit board, kirigami, flexible PCB

### ACM Reference Format:

Zeyu Yan, Anup Sathya, Sahra Yusuf, Jyh-Ming Lien, and Huaishu Peng. 2022. Fibercuit: Prototyping High-Resolution Flexible and Kirigami Circuits with a Fiber Laser Engraver. In *The 35th Annual ACM Symposium on User Interface Software and Technology (UIST '22)*, October 29–November 2, 2022, Bend, OR, USA. ACM, New York, NY, USA, 13 pages. <https://doi.org/10.1145/3526113.3545652>

### 1 INTRODUCTION

In the ongoing effort to weave computing into our daily lives [49], designing smart devices has been a major research focus in HCI. As these devices aim to discreetly recede into the environment or onto the user's body, they usually possess small and unconventional form factors. Building and prototyping such devices requires multiple rounds of iterative design to successfully integrate the function into the form. While the consumerization of 3D printers and laser cutters has shortened the iteration cycle, this advancement has been largely withheld from the PCB design and manufacturing process. Due to their flexibility and convenience, breadboards are still the most popular method to quickly prototype circuits. Apart from requiring bulky breakout boards for all surface-mounted components (SMD),

## LaserFactory: A Laser Cutter-based Electromechanical Assembly and Fabrication Platform to Make Functional Devices & Robots

Martin Nisser  
MIT CSAIL  
Cambridge, Massachusetts  
nisser@mit.edu

Christina Liao  
MIT CSAIL  
Cambridge, Massachusetts  
cliao@mit.edu

YuChen Chai  
MIT CSAIL  
Cambridge, Massachusetts  
yechai@mit.edu

Aradhana Adhikari  
MIT CSAIL  
Cambridge, Massachusetts  
adhikara@mit.edu

Steve Hodges  
Microsoft Research Cambridge, UK  
Cambridge, United Kingdom  
steve.hodges@microsoft.com

Stefanie Mueller  
MIT CSAIL  
Cambridge, Massachusetts  
stefanie.mueller@mit.edu

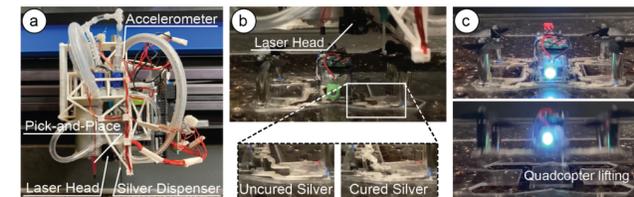


Figure 1: LaserFactory is an integrated fabrication process that creates fully functional devices. (a) Our hardware add-on to an existing laser cutter consists of a silver dispenser and pick-and-place mechanism and allows the machine to not only cut geometry, but also create circuit traces and assemble electronic components. Our accelerometer-based motion classifier enables the add-on to interface with the laser cutter without the need to change the underlying firmware. (b) To cure the deposited silver traces, we developed a laser soldering method that uses the heat of the defocused laser to make the traces conductive. (c) After laser soldering, the fabricated device is fully functional.

### ABSTRACT

LaserFactory is an integrated fabrication process that augments a commercially available fabrication machine to support the manufacture of fully functioning devices without human intervention. In addition to creating 2D and 3D mechanical structures, LaserFactory creates conductive circuit traces with arbitrary geometries, picks-and-places electronic and electromechanical components, and solders them in place. To enable this functionality, we make four contributions. First, we build a hardware add-on to the laser cutter head that can deposit silver circuit traces and assemble components. Second, we develop a new method to cure dispersed silver using a CO<sub>2</sub> laser. Third, we build a motion-based signaling method

that allows our system to be readily integrated with commercial laser cutters. Finally, we provide a design and visualization tool for making functional devices with LaserFactory. Having described the LaserFactory system, we demonstrate how it is used to fabricate devices such as a fully functioning quadcopter and a sensor-equipped wristband. Our evaluation shows that LaserFactory can assemble a variety of differently sized components (up to 65g), that these can be connected by narrow traces (down to 0.75mm) that become highly conductive after laser soldering (3.2Ω/m), and that our acceleration-based sensing scheme works reliably (to 99.5% accuracy).

### CCS CONCEPTS

• Human-centered computing → Human computer interaction (HCI).

### KEYWORDS

Human-computer interaction, rapid prototyping, personal fabrication, printed electronics, robotics



This work is licensed under a Creative Commons Attribution International 4.0 License.

CHI '21, May 8–13, 2021, Yokohama, Japan  
© 2021 Copyright held by the owner/authors(s).  
ACM ISBN 978-1-4503-8096-6/21/05.  
<https://doi.org/10.1145/3411764.3445692>

# UIST 2022

Yan et.al.

# CHI 2021

Nisser et.al.