

Smartwatch/Wearable Interaction

Huaishu Peng | UMD CS | Spring 2026







1972, first digital watch
Hamilton Watch Company and
Electro/Data Inc



1985, Epson RC-20 Wrist Computer
Calculator, Memo, 2K RAM and a
Touchscreen



1999, Samsung SPH-WP10
Smartwatch that can make calls

Fat-finger syndrome

Small screen

One hand operation

Between devices interaction

Anything that a smartwatch
can do but a smartphone
can't?



2015, Apple Watch

Input

Output



Input

Output



What if your hand is occupied





Your solution?

Electromyography (EMG) Sensor




2008, Daito Manabe

<https://www.youtube.com/watch?v=YxdIYFCp5Ic>

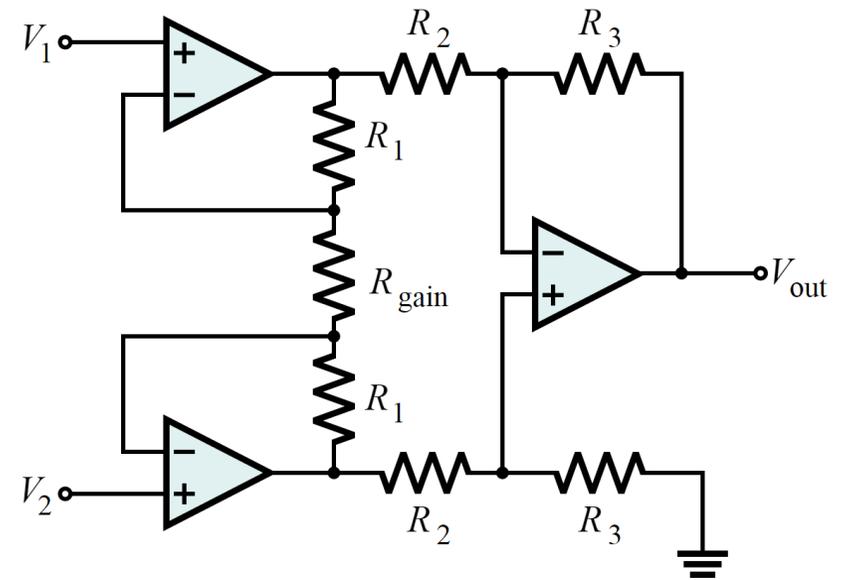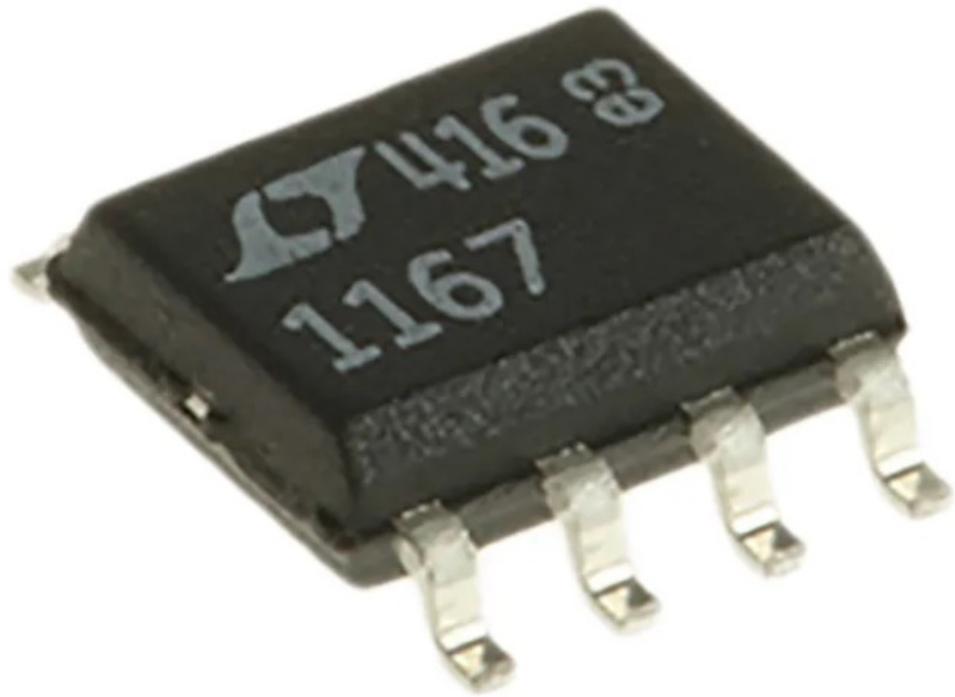

EMG Sensor

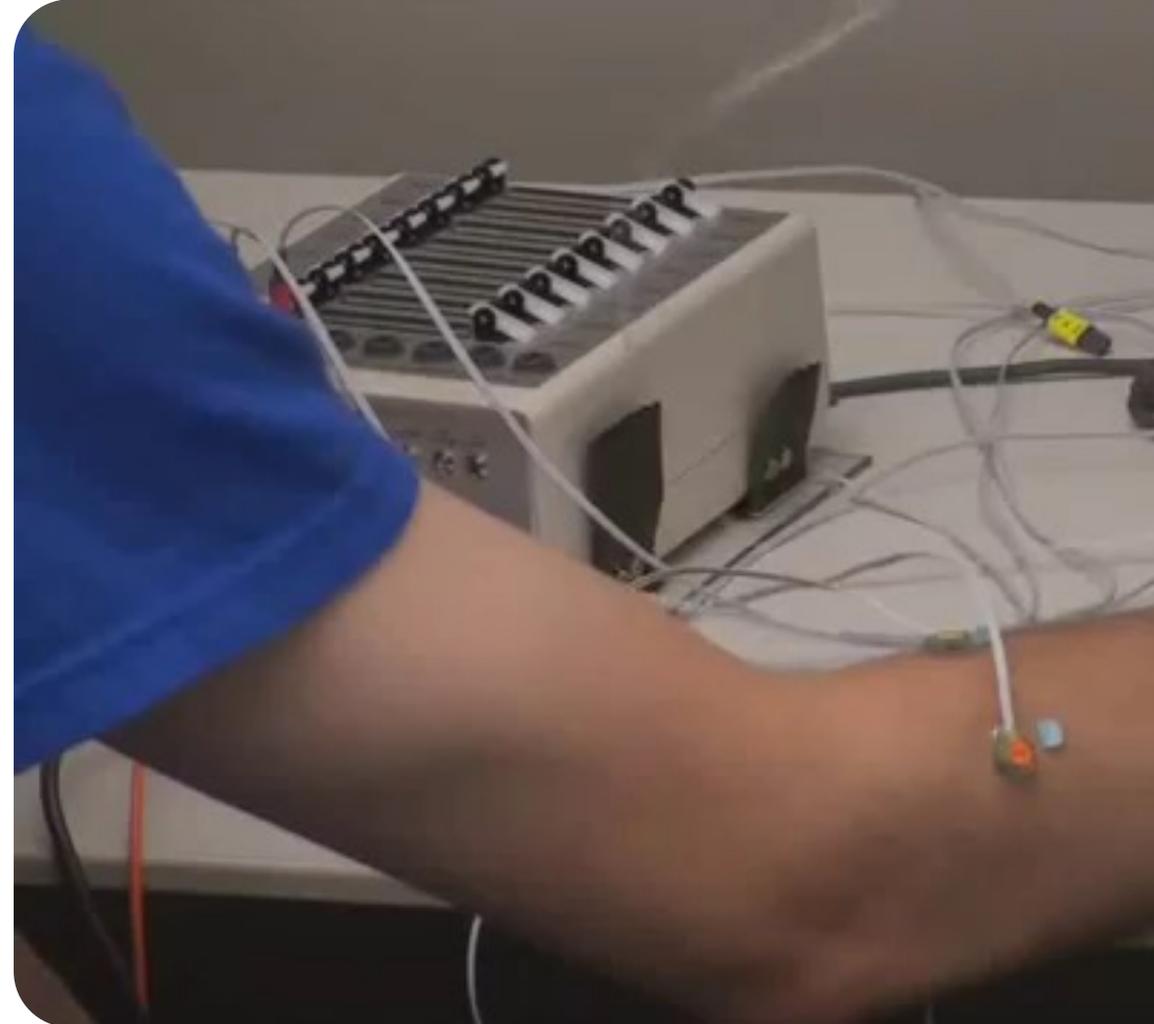

Enabling Always-Available Input with Muscle-Computer Interfaces

T. Scott Saponas¹, Desney S. Tan², Dan Morris², Ravin Balakrishnan⁴, Jim Turner³, James A. Landay¹
¹Computer Science and Engineering DUB Group University of Washington {ssaponas, landay}@cs.washington.edu
²Microsoft Research {desney, dan}@microsoft.com
³Microsoft Corporation jturner@microsoft.com
⁴Department of Computer Science University of Toronto ravin@dgp.toronto.edu

ABSTRACT

Previous work has demonstrated the viability of applying offline analysis to interpret forearm electromyography (EMG) and classify finger gestures on a physical surface. We extend those results to bring us closer to using muscle-computer interfaces for always-available input in real-world applications. We leverage existing taxonomies of natural human grips to develop a gesture set covering interaction in free space even when hands are busy with other objects. We present a system that classifies these gestures in real-time and we introduce a bi-manual paradigm that enables use in interactive systems. We report experimental results demonstrating four-finger classification accuracies averaging 79% for pinching, 85% while holding a travel mug, and 88% when carrying a weighted bag. We further show generalizability across different arm postures and explore the tradeoffs of providing real-time visual feedback.

ACM Classification: H.1.2 [User/Machine Systems]; H.5.2 [User Interfaces]: Input devices and strategies; B.4.2 [Input/Output Devices]: Channels and controllers

General terms: Design, Human Factors

Keywords: Electromyography (EMG), Muscle-Computer Interface, input, interaction.

INTRODUCTION

Our hands and our ability to control them have evolved over thousands of years, yielding an amazing ability to precisely manipulate tools. As such, we have often crafted our environments and technologies to take advantage of this ability. For example, many current computer interfaces require manipulating physical devices such as keyboards, mice, and joysticks. Even future looking research systems

Previous work has explored hands-free and implement-free input techniques based on a variety of sensing modalities. For example, computer vision enables machines to recognize faces, track movement and gestures, and reconstruct 3D scenes [24]. Similarly, speech recognition allows for hands-free interaction, enabling a variety of speech-based desktop and mobile applications [8, 11]. However, these technologies have several inherent limitations. First, they require observable interactions that can be inconvenient or socially awkward. Second, they are relatively sensitive to environmental factors such as light and noise. Third, in the case of computer vision, sensors that visually sense the environment are often susceptible to occlusion.

We assert that computer input systems can leverage the full bandwidth of finger and hand gestures without requiring the user to manipulate a physical transducer. In this paper, we show how forearm electromyography (EMG) can be used to detect and decode human muscular movement in real time, thus enabling interactive finger gesture interaction. We envision that such sensing can eventually be achieved with an unobtrusive wireless forearm EMG band (see Figure 1).

Previous work exploring muscle-sensing for input has primarily focused either on using a single large muscle (rather than the fingers) [2, 3, 4, 22, 25], which does not provide the breadth of input signals required for computer input, and/or on situations where the hand and arm are constrained to a surface [3, 4, 15, 21, 23, 25], which is not a realistic usage scenario for always-available input devices. Saponas et al. [18] demonstrated the feasibility of using offline machine learning techniques to interpret forearm muscle-sensing and classify finger gestures on a surface. We extend their offline classification results to achieve online classification.

UIST 2009
Saponas et.al. from MSR

EMG Sensor

Product Index > Development Boards, Kits, Programmers > Evaluation Boards > Expansion Boards, Daughter Cards > SparkFun Electronics DEV-27924

Dark Mode Share

New at DigiKey



Image shown is a representation only. Exact specifications should be obtained from the product data sheet.



DEV-27924

DigiKey Part Number 1568-DEV-27924-ND

Manufacturer [SparkFun Electronics](#)

Manufacturer Product Number DEV-27924

Description MYOWARE 2 MUSCLE SENSOR

Manufacturer Standard Lead Time 12 Weeks

Customer Reference

Detailed Description

Electromyography (EMG) Sensor MyoWare Platform Evaluation Expansion Board

Datasheet [Datasheet](#)

In-Stock: 45

[Check for Additional Incoming Stock](#)

QUANTITY

[Add to List](#)

[Add to Cart](#)

All prices are in USD

Bulk

| QUANTITY | UNIT PRICE | EXT PRICE |
|----------|------------|-----------|
| 1 | \$43.50000 | \$43.50 |

Myo Wristband ~\$300+

What if your hand is occupied



Your solution?


WristWhirl: One-handed Continuous Smartwatch Input using Wrist Gestures

Contribution

One hand input

Continuous 2D input

Keeping the screen stable

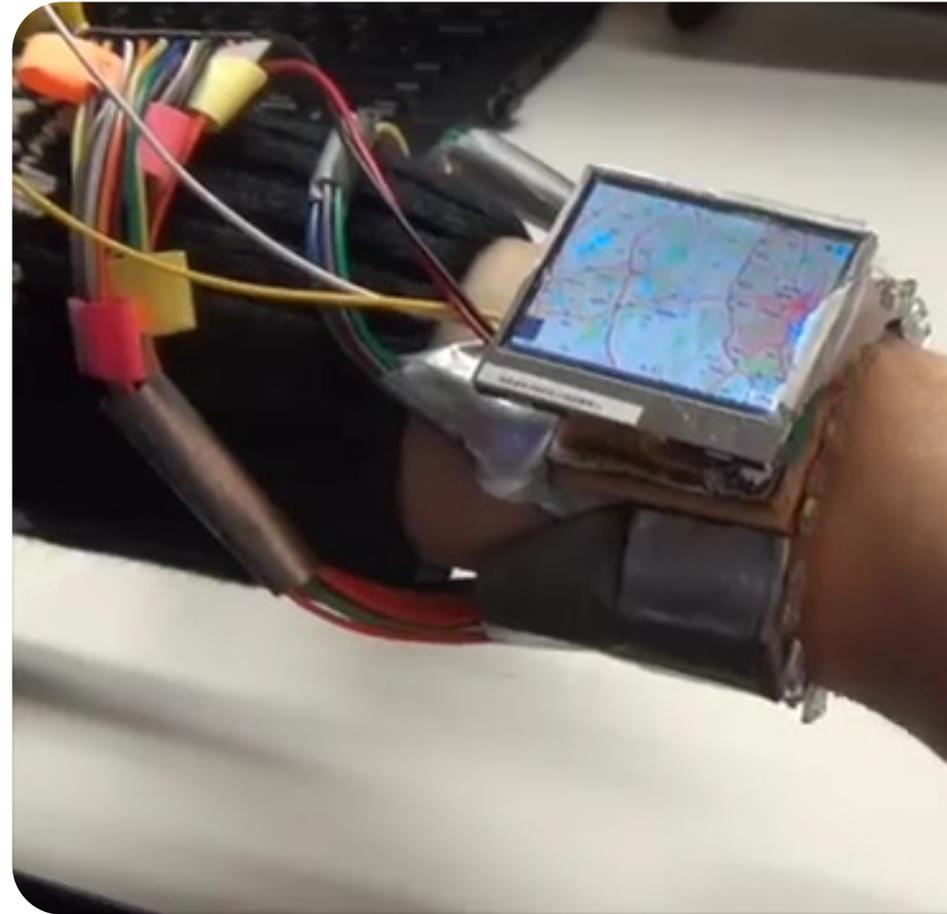

WristWhirl: One-handed Continuous Smartwatch Input using Wrist Gestures

Jun Gong¹, Xing-Dong Yang¹, Pourang Irani²

Dartmouth College¹, University of Manitoba²
{jun.gong.gr; xing-dong.yang}@dartmouth.edu, pourang.irani@cs.umanitoba.ca

ABSTRACT

We propose and study a new input modality, WristWhirl, that uses the wrist as an always-available joystick to perform one-handed continuous input on smartwatches. We explore the influence of the wrist's bio-mechanical properties for performing gestures to interact with a smartwatch, both while standing still and walking. Through a user study, we examine the impact of performing 8 distinct gestures (4 directional marks, and 4 free-form shapes) on the stability of the watch surface. Participants were able to perform directional marks using the wrist as a joystick at an average rate of half a second and free-form shapes at an average rate of approximately 1.5secs. The free-form shapes could be recognized by a S1 gesture recognizer with an accuracy of 93.8% and by three human inspectors with an accuracy of 85%. From these results, we designed and implemented a proof-of-concept device by augmenting the watchband using an array of proximity sensors, which can be used to draw gestures with high quality. Finally, we demonstrate a number of scenarios that benefit from one-handed continuous input on smartwatches using WristWhirl.

Author Keywords

One-handed interaction; smartwatch; smartwatch input; continuous input; gestural input.

ACM Classification Keywords

H.5.2 [Information interfaces and presentation]: User Interfaces. - Graphical user interfaces.

INTRODUCTION

Interacting with a smartwatch often necessitates both hands, especially for continuous input such as flicking the device screen with the opposite-side hand (OSH) [34]. This becomes tedious as such wearable devices are predominantly valuable for glancing at information when the users' hands are occupied while holding objects or busy at other tasks.

Efforts are underway at developing methods to allow same-side hand (SSH) operation on smartwatches. However, these

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored.

have primarily targeted discrete input operations, such as in the case of micro-interactions [2], [33] or for assigning commands to finger postures [10, 24, 36]. Tilting the wrist is a viable approach [9], but comes at the cost of quickly losing visual contact with the display as tilt movements can exceed the acceptable screen viewing ranges [9, 23]. Performing more expressive continuous gestural input still remains challenging using the same-side hand.

We study and present an alternative approach, WristWhirl, an interaction technique that uses continuous wrist movements, or whirls, for one-handed operation on smartwatches (Figure 1). When observing the collective range-of-motions of the wrist along each of its axes of movement [12] (see Figure 2 and the WRIST AS JOYSTICK section), the hand can be viewed as a natural joystick. We explore the ability of the human wrist to perform complex gestures using full wrist motions, or wrist whirls. We first demonstrate that wrist whirl is sufficiently expressive to capture common touch interactions as well as generate free-form shapes (Figure 1 right) without impacting screen viewing stability. To validate the use of WristWhirl in different application scenarios, we implemented a proof-of-concept wristband sensor (Figure 1 left) by augmenting the strap of a smartwatch using an array of infrared proximity sensors, facing the user's palm. The sensors detect the wrist's joystick-like motion by sensing the degree of flexion/extension and ulnar/radial deviation of the wrist motion. Our preliminary system evaluation showed that the user could use the prototype to draw gestures at a quality comparable to that achieved by a commercial motion tracking system (e.g. Vicon [3]). Our approach does not seek to replace two-handed use of smartwatches, but instead provides an alternative to same-sided smartwatch input.



UIST 2015

Gong et.al. from Dartmouth

WristWhirl: One-handed Continuous Smartwatch Input using Wrist Gestures



Will the wrist input be useful?

Study before building

-- using external Vicon Tracker

WristWhirl: One-handed Continuous Smartwatch Input using Wrist Gestures


Exploring the concept feasibility before implementation

8 gestures
Hand down while standing/walking
Hand up while standing/walking




WristWhirl: One-handed Continuous Smartwatch Input using Wrist Gestures

Exploring the concept feasibility before implementation

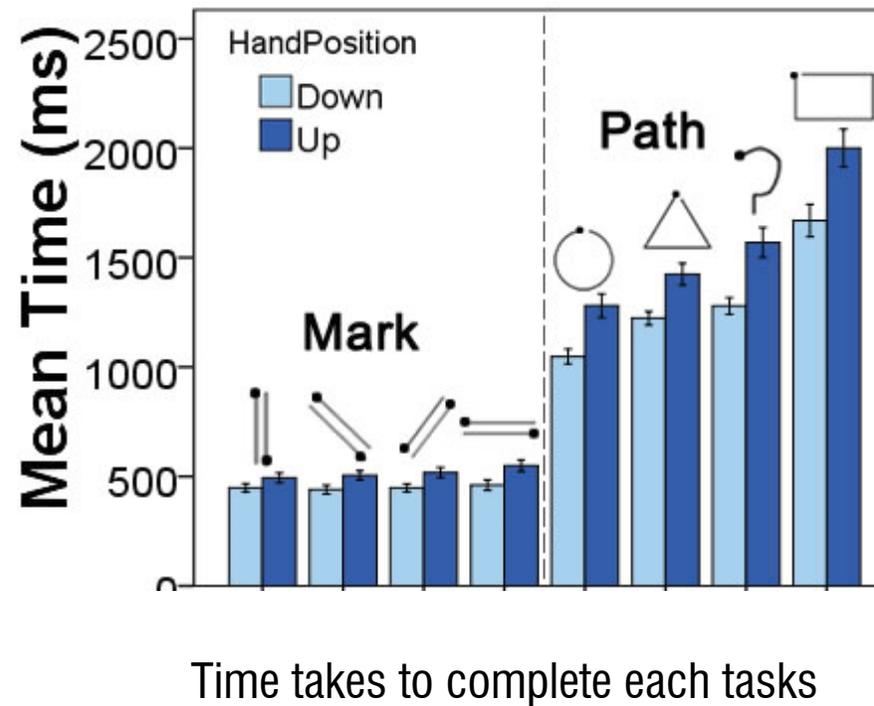

WristWhirl: One-handed Continuous Smartwatch Input using Wrist Gestures

Exploring the concept feasibility before implementation

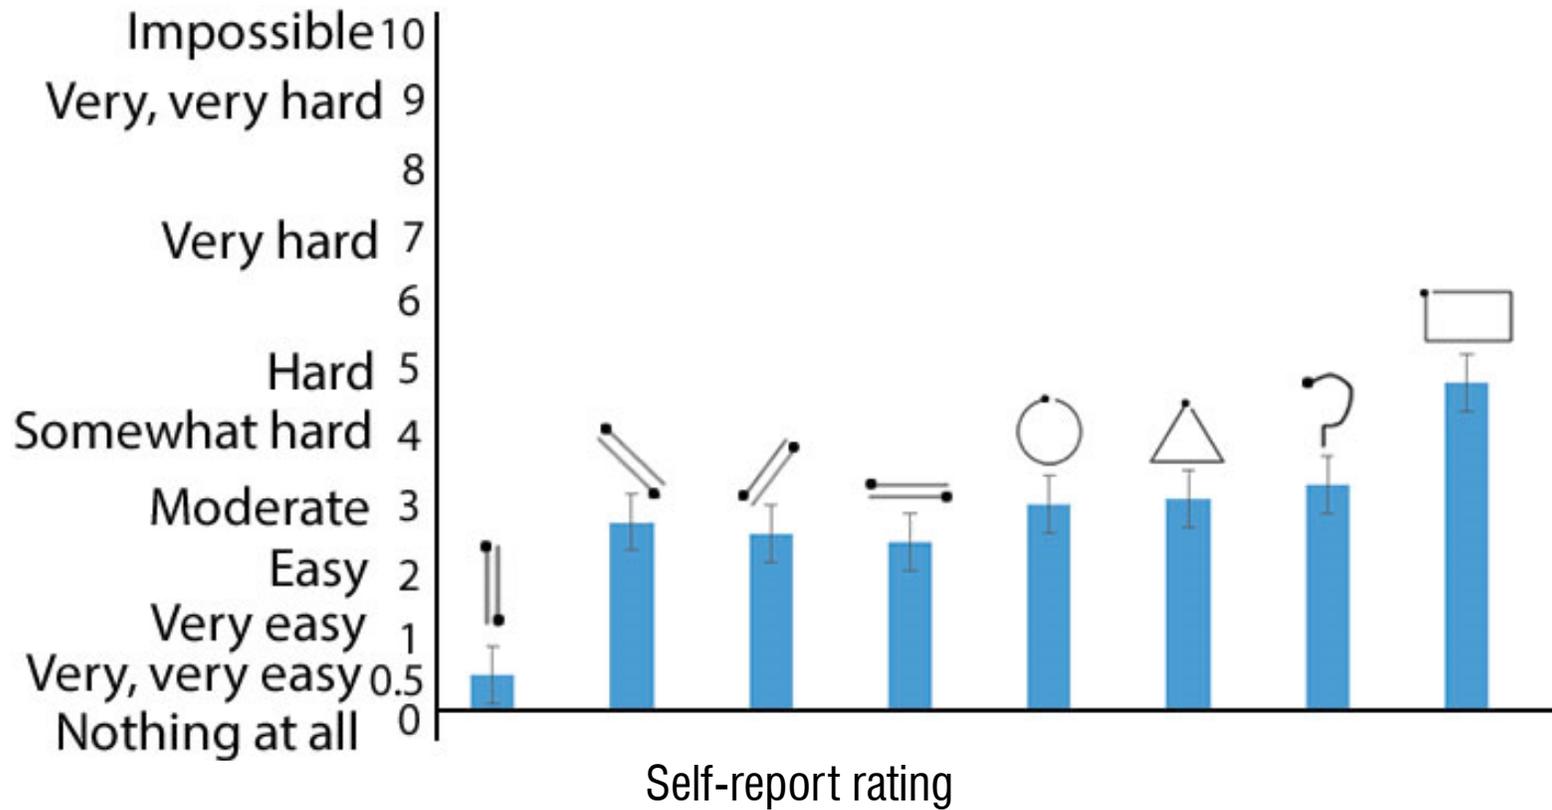

WristWhirl: One-handed Continuous Smartwatch Input using Wrist Gestures

Implementation



Piezo Vibration Sensor - Small Horizontal

SEN-09198 ROHS ✓

★ ★ ★ ☆ ☆ 2

\$2.95

Volume sales pricing

- 1 +

Quantity discounts available

ADD TO CART

DESCRIPTION

DOCUMENTS


The Minisense 100 from Measurement Specialties is a low-cost cantilever-type vibration sensor loaded by a mass to offer high sensitivity at low frequencies. Useful for detecting vibration and 'tap' inputs from a user. A small AC and large voltage (up to +/-90V) is created when the film moves back and forth. A simple resistor should get the voltage down to ADC levels. Can also be used for impact sensing or a flexible switch.

Comes with machine pins that allows for horizontal mounting.



WristWhirl: One-handed Continuous Smartwatch Input using Wrist Gestures


Implementation

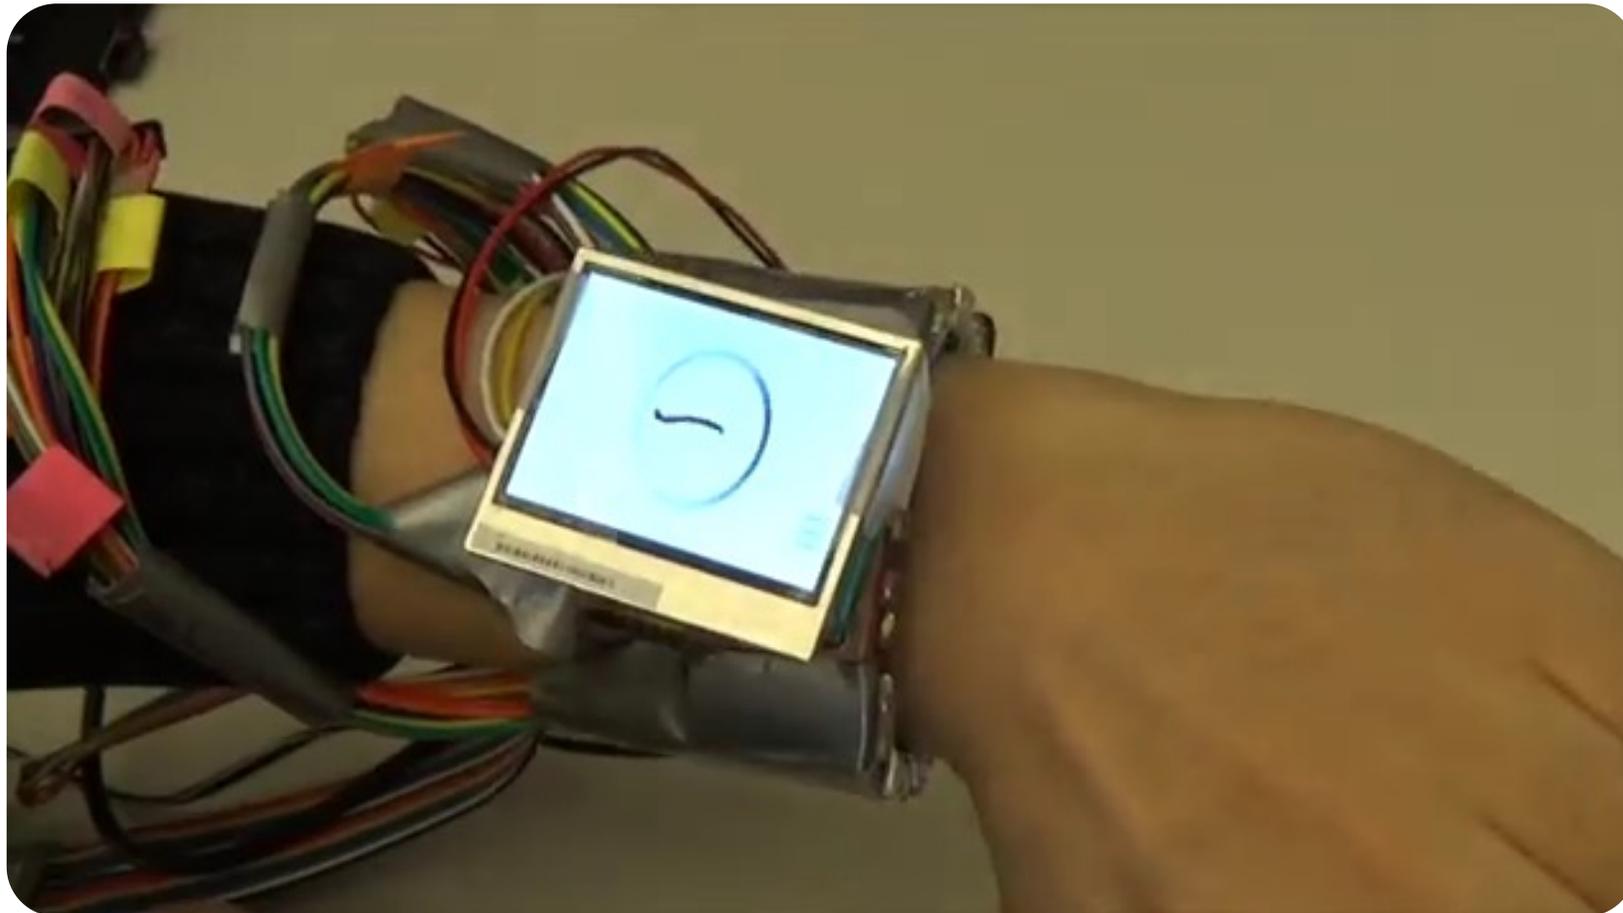

WristWhirl: One-handed Continuous Smartwatch Input using Wrist Gestures

Recognition -> \$1 Unistroke Recognizer


<http://depts.washington.edu/madlab/proj/dollar/index.html>

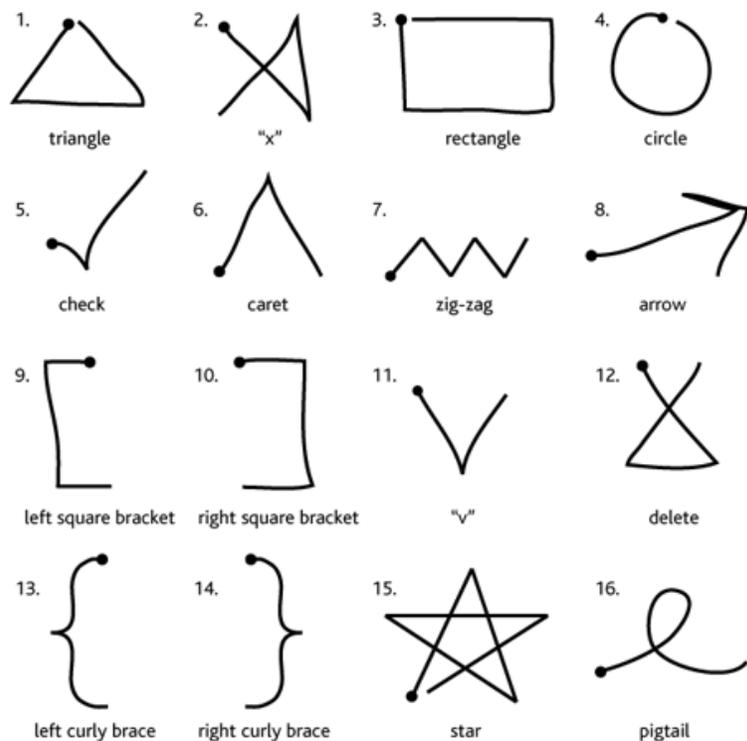

- Use Golden Section Search (*original*)
- Use Protractor (*faster*)

Make strokes on this canvas. If a misrecognition occurs, add the misrecognized unistroke as an example of the intended gesture.


Result: check (0.93) in 1 ms.

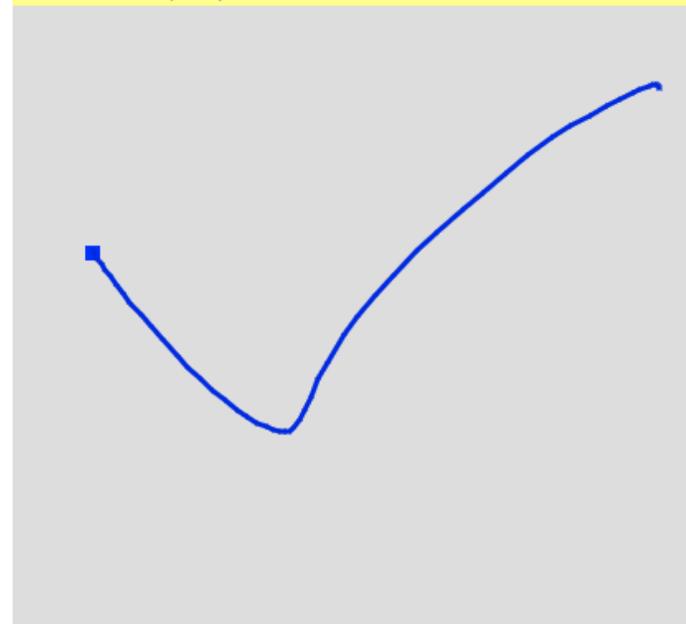

Add as example of existing type:
Add as example of custom type:
Delete all user-defined gestures:

WristWhirl: One-handed Continuous Smartwatch Input using Wrist Gestures

Application

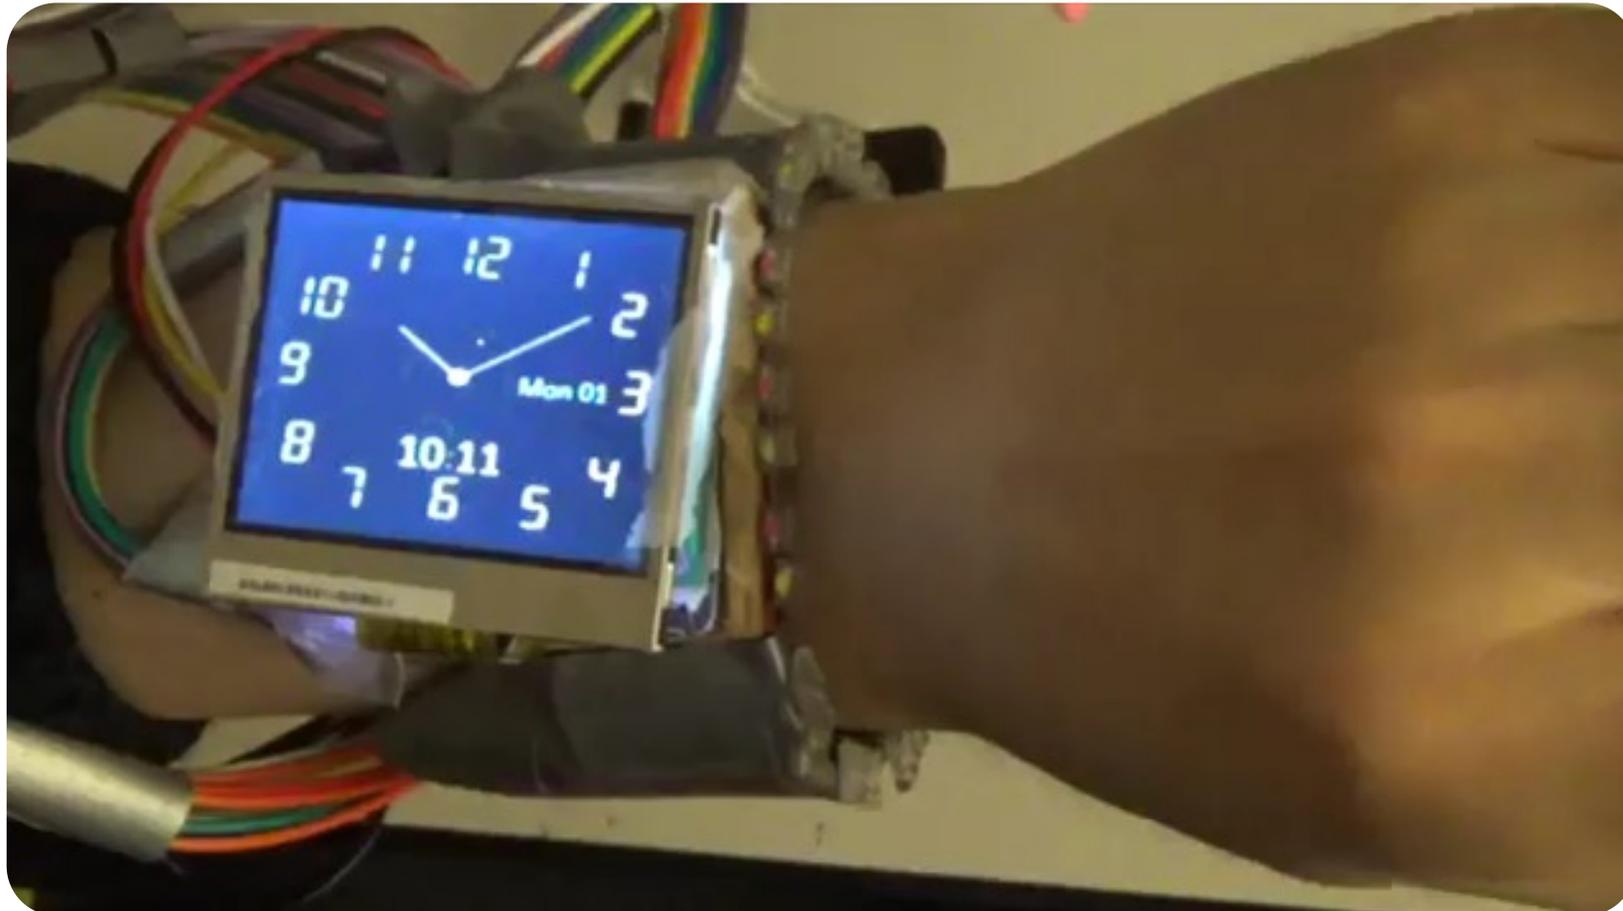

WristWhirl: One-handed Continuous Smartwatch Input using Wrist Gestures

Application

Killer app?



CHI 2018 Honourable Mention

CHI 2018, April 21–26, 2018, Montréal, QC, Canada

WristText: One-handed Text Entry on Smartwatch using Wrist Gestures

Jun Gong¹, Zheer Xu^{1,2}, Qifan Guo^{1,2}, Teddy Seyed¹, Xiang 'Anthony' Chen³, Xiaojun Bi⁴, Xing-Dong Yang¹

Dartmouth College¹, Shanghai Jiao Tong University², University of Science and Technology of China³, University of Calgary⁴, Carnegie Mellon University⁵, Stony Brook University⁶

{jun.gong.g; xing-dong.yang}@dartmouth.edu, zheerxu@outlook.com, guoqifan@mail.ustc.edu.cn, xiangchen@acm.org, teddy.seyed@ucalgary.ca, xiaojun@cs.stonybrook.edu



Figure 1. (a) One-handed text entry on a smartwatch by whirling the wrist; (b) to enter "you", a user selects [YZAB] → [ONML] → [UVWX] by striking the wrist N → S → W. The entered text and suggested auto-completer are shown on the screen.

ABSTRACT
We present WristText - a one-handed text entry technique for smartwatches using the joystick-like motion of the wrist. A user enters text by whirling the wrist of the watch hand, towards six directions which each represent a key in a circular keyboard, and where the letters are distributed in an alphabetical order. The design of WristText was an iterative process, where we first conducted a study to investigate optimal key size, and found that keys needed to be 55° or wider to achieve over 90% striking accuracy. We then computed an optimal keyboard layout, considering a joint optimization problem of striking accuracy, striking comfort, word disambiguation. We evaluated the performance of WristText through a five-day study with 10 participants in two text entry scenarios: hand-up and hand-down. On average, participants achieved a text entry speed of 9.9 WPM across all sessions, and were able to type as fast as 15.2 WPM by the end of the last day.

Author Keywords
Smartwatch; text entry; one-handed input;

INTRODUCTION
Text entry is a common and important task in daily mobile life [7], comprising of approximately 40% of mobile activity [10]. However, entering text on a smartwatch is challenging because of the small form factor and its wearable context. One of the most commonly observed problems is the need to use one or both hands for a task (e.g. driving or walking while holding an umbrella or shopping bags). This is cumbersome in the context of smartwatches, as a user is required to interrupt their ongoing task to enter text, which reduces the purposefulness of smartwatches, as they are predominantly valuable for accessing information while on-the-go. To mitigate this problem, one solution is speech input, which is socially inappropriate in some situations (e.g. at meetings or classrooms) [6], and may also expose the user's privacy. Another solution is to enable one-handed interaction for smartwatches using the same-side hand (SSH) [31]. However, prior work has primarily been targeted at general interactions, such as assigning discrete

CHI 2018
Gong et.al. from Dartmouth

Fat-finger syndrome

Small screen

One hand operation

Between devices interaction

Anything that a smartwatch
can do but a smartphone
can't?



SkinTrack: Using the Body as an Electrical Waveguide for Continuous Finger Tracking on the Skin

Interaction on skin

Continuous touch tracking

Non-obtrusive



SKIN-BASED CONTROLLER

Tracking Fingers #chi4good, CHI 2016, San Jose, CA, USA

SkinTrack: Using the Body as an Electrical Waveguide for Continuous Finger Tracking on the Skin

Yang Zhang¹ Junhan Zhou² Gierad Laput¹ Chris Harrison¹
¹Human-Computer Interaction Institute, ²Electrical and Computer Engineering Department
Carnegie Mellon University
5000 Forbes Avenue, Pittsburgh, PA 15213
(yang.zhang, gierad.laput, chris.harrison)@cs.cmu.edu, junhanz@ece.cmu.edu

ABSTRACT
SkinTrack is a wearable system that enables continuous touch tracking on the skin. It consists of a ring, which emits a continuous high frequency AC signal, and a sensing wristband with multiple electrodes. Due to the phase delay inherent in a high-frequency AC signal propagating through the body, a phase difference can be observed between pairs of electrodes. SkinTrack measures these phase differences to compute a 2D finger touch coordinate. Our approach can segment touch events at 99% accuracy, and resolve the 2D location of touches with a mean error of 7.6mm. As our approach is compact, non-invasive, low-cost and low-powered, we envision the technology being integrated into future smartwatches, supporting rich touch interactions beyond the confines of the small touchscreen.

Author Keywords
Finger tracking, waveguide, smartwatch, on-body interaction, around-device interaction, ADI

ACM Classification Keywords
H.5.2, [User interfaces] – Input devices and strategies.

INTRODUCTION
Small wearable devices—such as smartwatches and digital jewelry—are first becoming viable computing platforms. However, their small size severely limits the user experience. For example, touchscreens on smartwatches suffer not only from a paucity of interactive surface area, but also must contend with significant finger occlusion. In general, the interfaces on these devices rely on basic input modalities (often four or fewer onscreen buttons, or even just directional swipes). In response, many research efforts have investigated how to leverage the area around devices to




Figure 1. Our sensor band and signal-emitting ring allow the arm to be appropriated for continuous, on-skin touch tracking (top), expanding interaction beyond the small confines of a smartwatch touchscreen (bottom).

In this paper, we propose a novel sensing approach for appropriating the skin as an interactive, touch-tracking surface (Figure 1). Our system, SkinTrack, has two key components. First is a ring that emits an imperceptible and harmless 80MHz, 1.2Vpp AC signal into the finger on which it is worn. The second component is a wristband, worn on the opposite arm, and instrumented with a structured electrode pattern. When the user's finger touches the skin, the electrical signal propagates into the arm tissue and

CHI 2016

Zhang et.al. from CMU


SkinTrack: Using the Body as an Electrical Waveguide for Continuous Finger Tracking on the Skin

Will IR array work?




SkinTrack: Using the Body as an Electrical Waveguide for Continuous Finger Tracking on the Skin

Solution

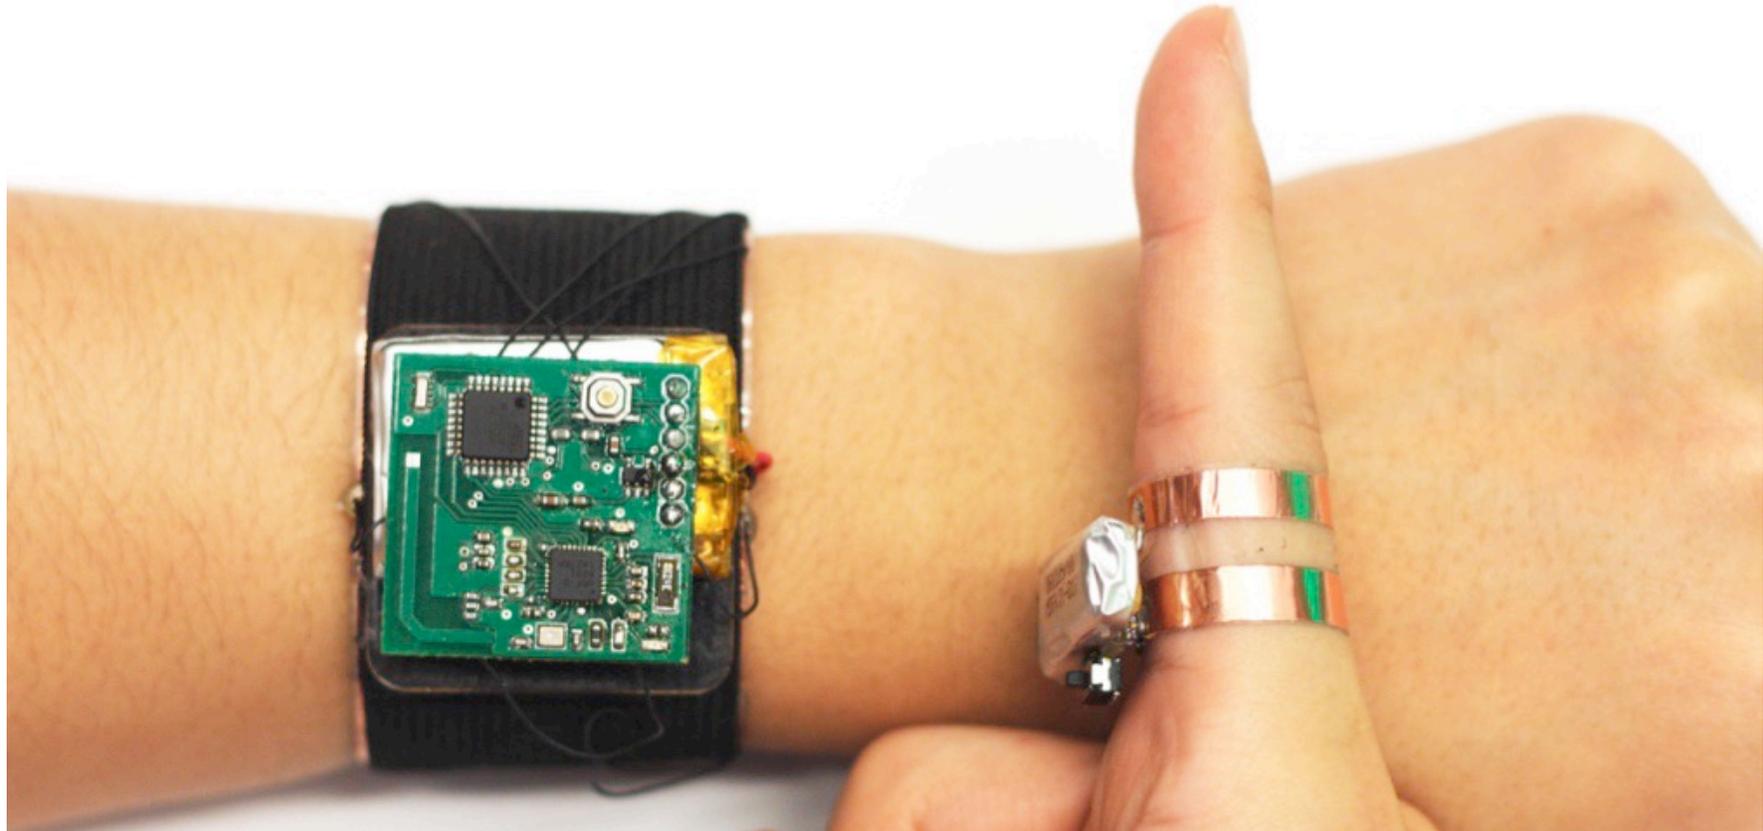

SkinTrack: Using the Body as an Electrical Waveguide for Continuous Finger Tracking on the Skin

Sensing principle

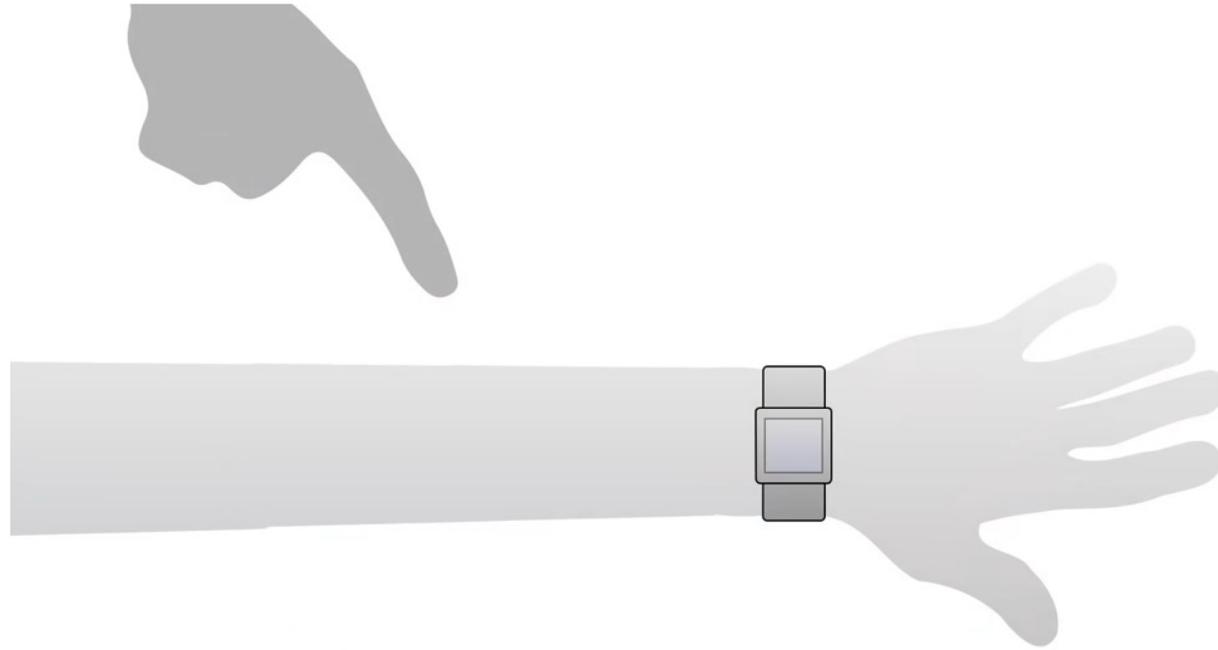


SkinTrack: Using the Body as an Electrical Waveguide for Continuous Finger Tracking on the Skin

Sensing principle

$\lambda = \text{wave speed/frequency}$
or
 $\lambda = v / f$




-> Frequency: 80MHz AC signal
-> Speed: 7.3×10^7 m/s

-> Length: 91cm wavelength
-> 1cm equals 4 degree phase shift

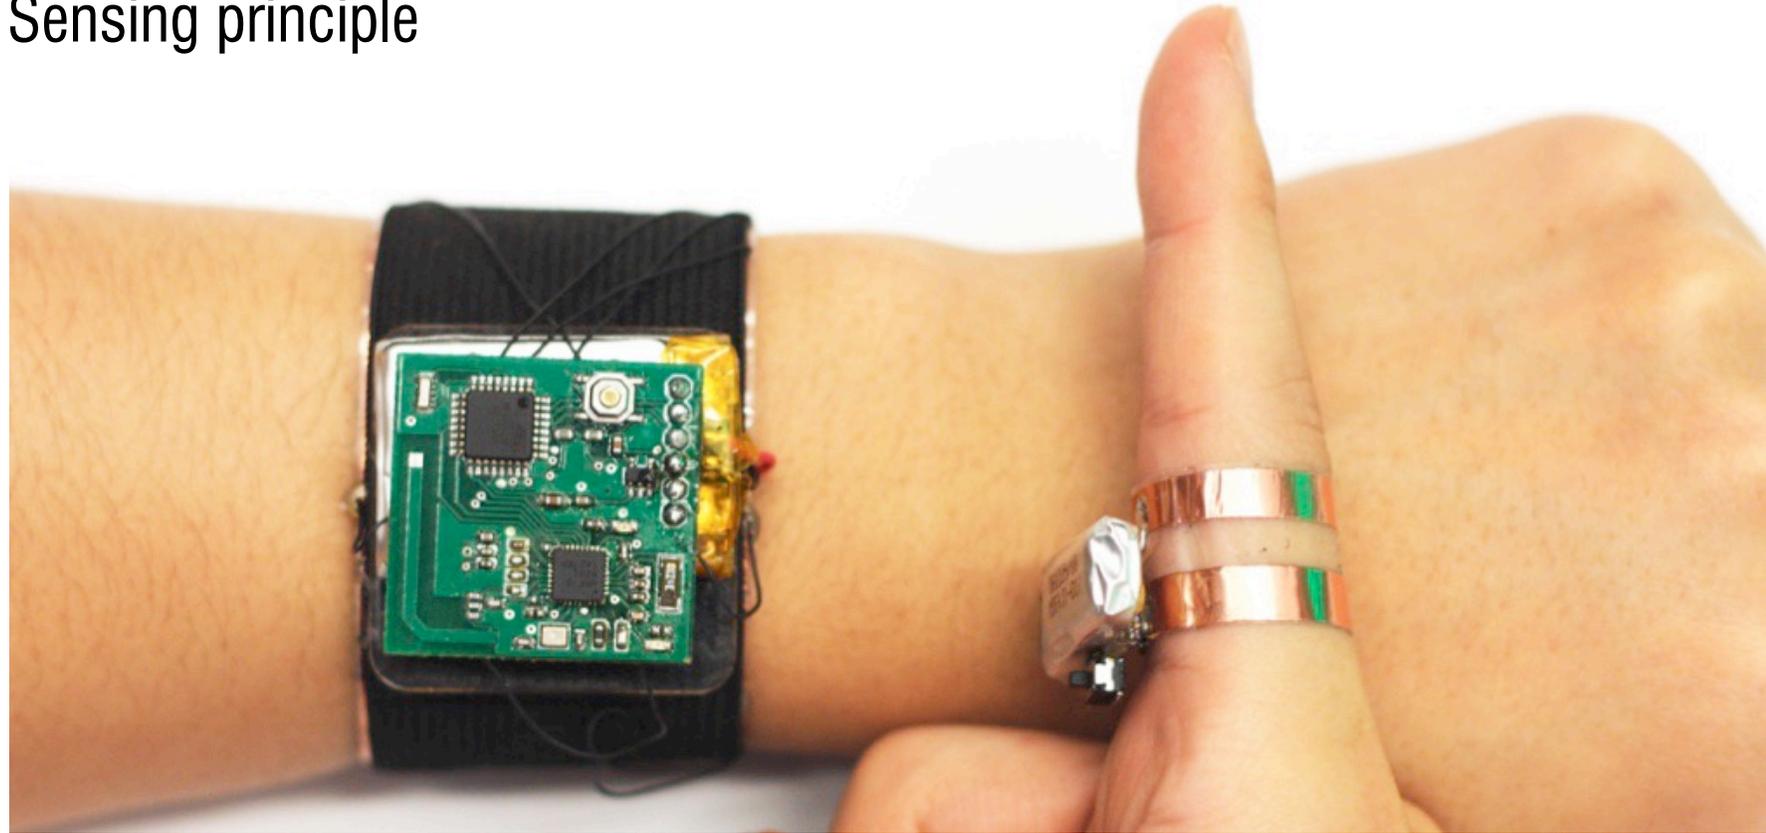

SkinTrack: Using the Body as an Electrical Waveguide for Continuous Finger Tracking on the Skin

Hardware

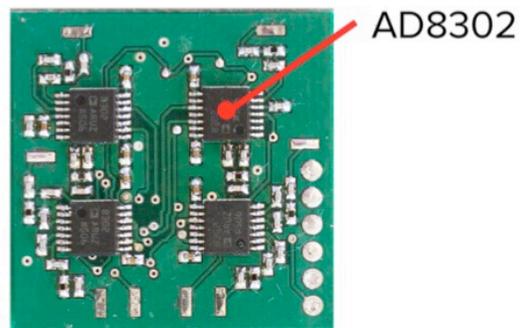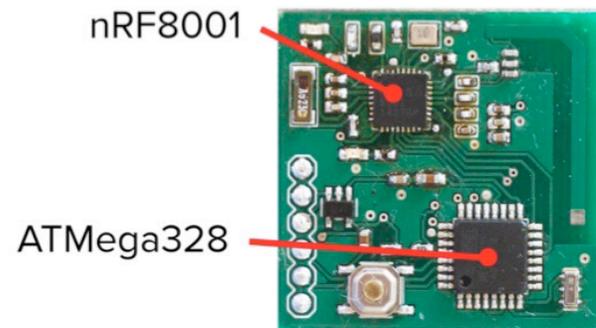
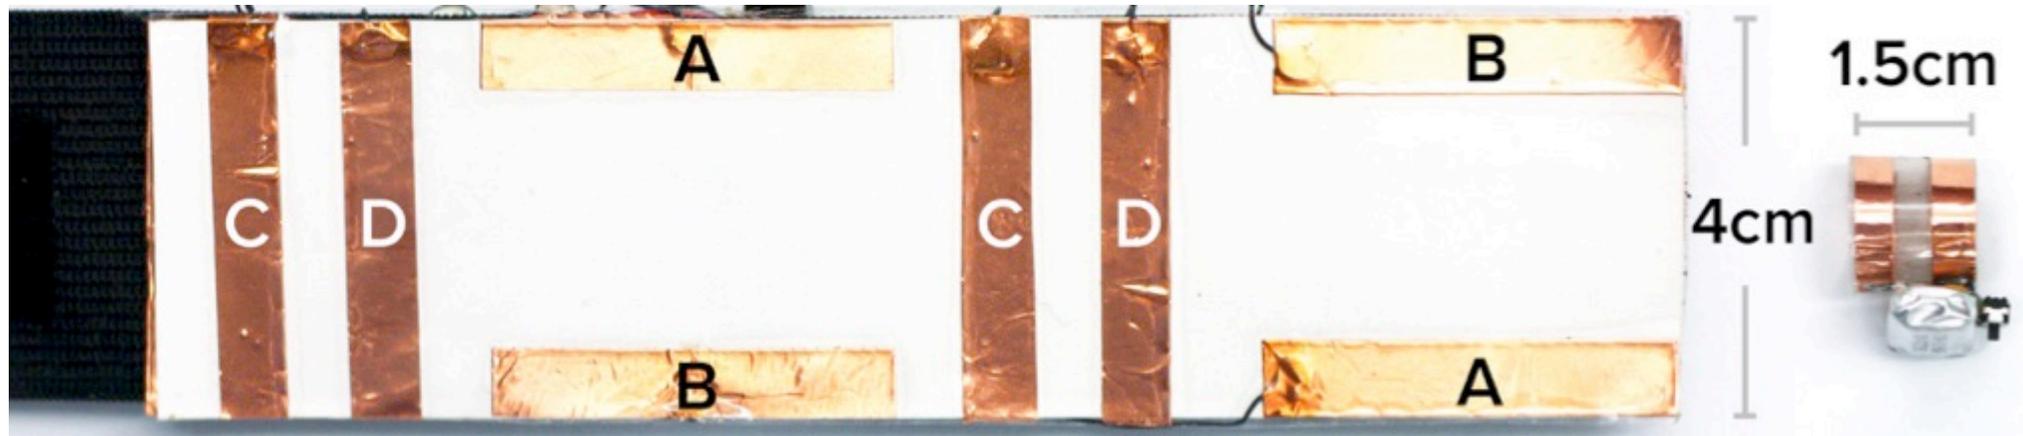


Ring: 80MHz oscillator
110 mAh
15h battery life

Band: 4 electrode pairs

SkinTrack: Using the Body as an Electrical Waveguide for Continuous Finger Tracking on the Skin

Evaluation

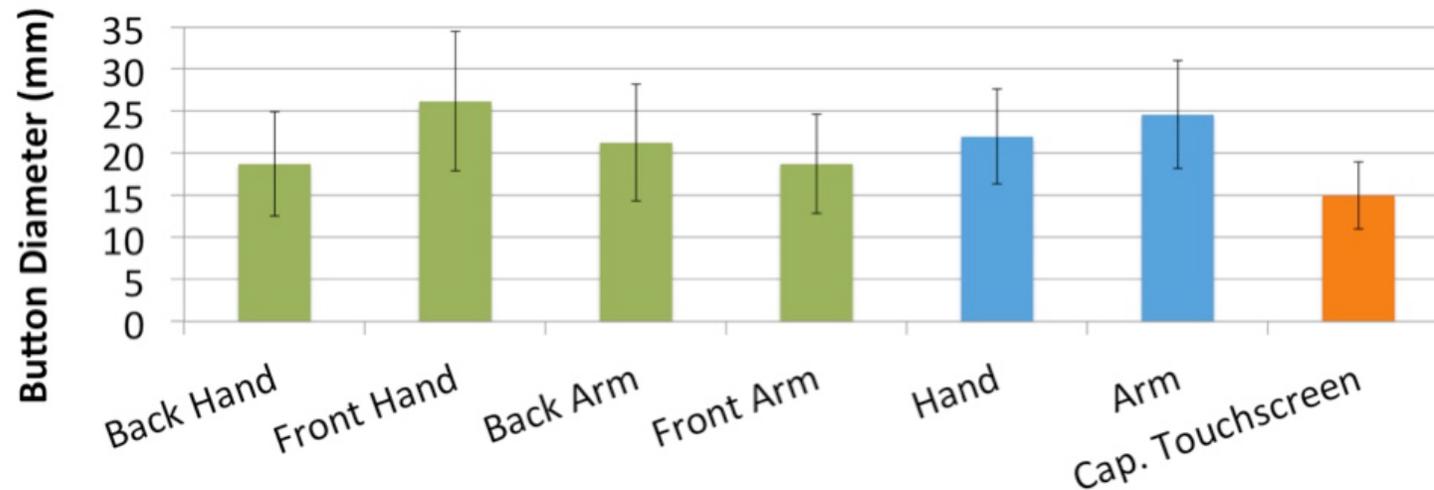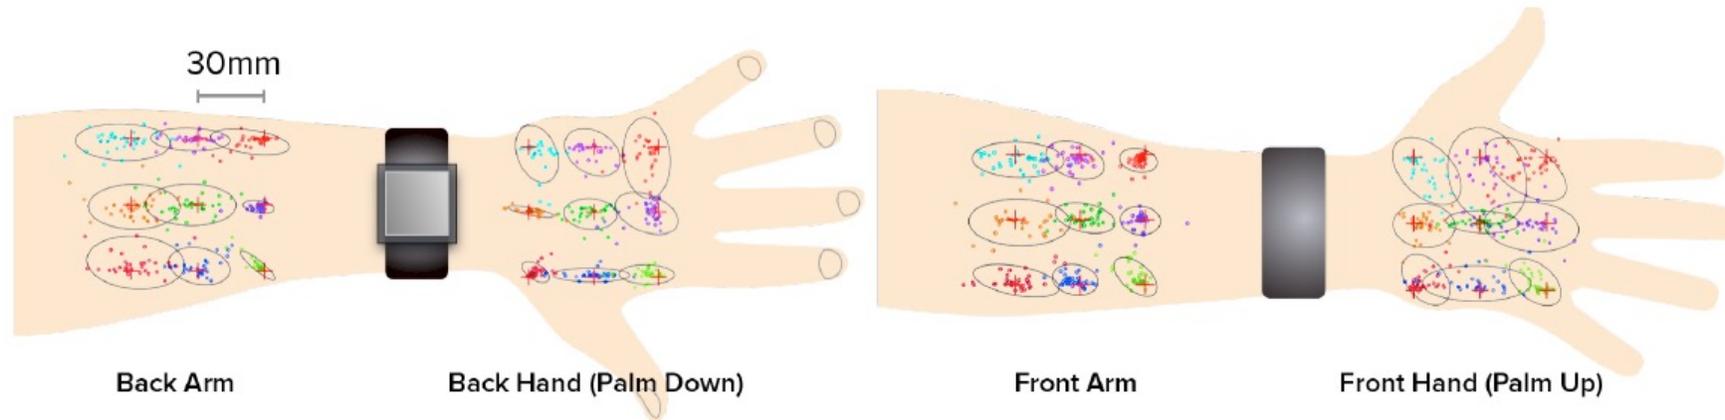

SkinTrack: Using the Body as an Electrical Waveguide for Continuous Finger Tracking on the Skin

Application



Fat-finger syndrome

Small screen

One hand operation

Between devices interaction

Anything that a smartwatch
can do but a smartphone
can't?




ViBand: High-Fidelity Bio-Acoustic Sensing Using Commodity Smartwatch Accelerometers

Gesture detection

Object detection

All with built-in sensors

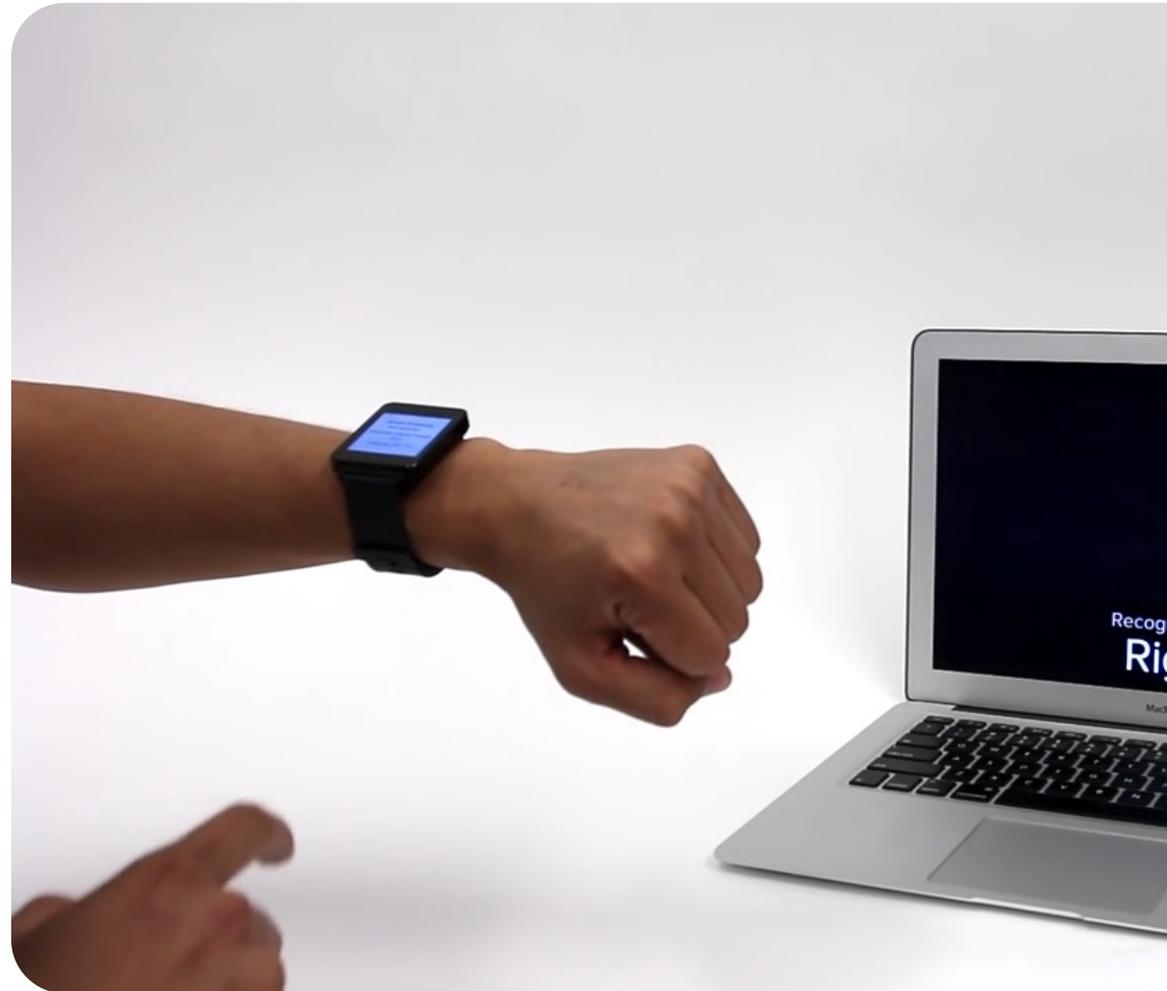

ViBand: High-Fidelity Bio-Acoustic Sensing Using Commodity Smartwatch Accelerometers

Gierad Laput Robert Xiao Chris Harrison
Carnegie Mellon University, Human-Computer Interaction Institute
5000 Forbes Ave, Pittsburgh, PA 15213
{gierad.laput, brx, chris.harrison}@cs.cmu.edu

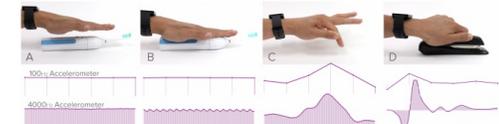


Figure 1. Comparison of 100 Hz vs. 4000 Hz accelerometer signals. At steady state, both signals look identical (A). However, high frequency micro-vibrations propagating through the arm are missed by the 100 Hz accelerometer (B). Characteristic vibrations can come from oscillating objects (B), hand gestures (C) and the operation of mechanical objects (D).

ABSTRACT

Smartwatches and wearables are unique in that they reside on the body, presenting great potential for always-available input and interaction. Their position on the wrist makes them ideal for capturing *bio-acoustic* signals. We developed a custom smartwatch kernel that boosts the sampling rate of a smartwatch's existing accelerometer to 4 kHz. Using this new source of high-fidelity data, we uncovered a wide range of applications. For example, we can use bio-acoustic data to classify hand gestures such as flicks, claps, scratches, and taps, which combine with on-device motion tracking to create a wide range of expressive input modalities. Bio-acoustic sensing can also detect the vibrations of grasped mechanical or motor-powered objects, enabling passive object recognition that can augment everyday experiences with context-aware functionality. Finally, we can generate structured vibrations using a transducer, and show that data can be transmitted through the human body. Overall, our contributions unlock user interface techniques that previously relied on special-purpose and/or cumbersome instrumentation, making such interactions considerably more feasible for inclusion in future consumer devices.

Author Keywords
Wearables; Gestures; Object Detection; Vibro-Tags

ACM Classification Keywords

H.5.2. [User interfaces] – Input devices and strategies.

INTRODUCTION

Watches are unique among computing devices in that they are worn, offering great potential to transform arms and hands into expressive input and sensing platforms. As people use their hands, tiny micro-vibrations propagate through the arm, carrying information about the objects they interact with and the activities they perform throughout the day. Smartwatches are ideally situated to capture these vibrations (Figures 1 and 2).


Although all modern smartwatches contain accelerometers, their APIs generally limit the sampling rate to around 100 Hz (Figure 1, top purple lines). This is sufficient for their main use: detecting the orientation of the watch (e.g., to automatically activate the screen when raised). Some smartwatches also track step count (~2 Hz), which is also easily captured with 100 Hz sampling.

In this work, we use an off-the-shelf smartwatch with a modified OS kernel to capture accelerometer data at 4000 times per second (Figure 1, bottom purple lines). This fast sampling allows the smartwatch to not only capture coarse motions, but also rich bio-acoustic signals. For example, in

UIST 2016
Laput et.al. from CMU


ViBand: High-Fidelity Bio-Acoustic Sensing Using Commodity Smartwatch Accelerometers

Sensing principle

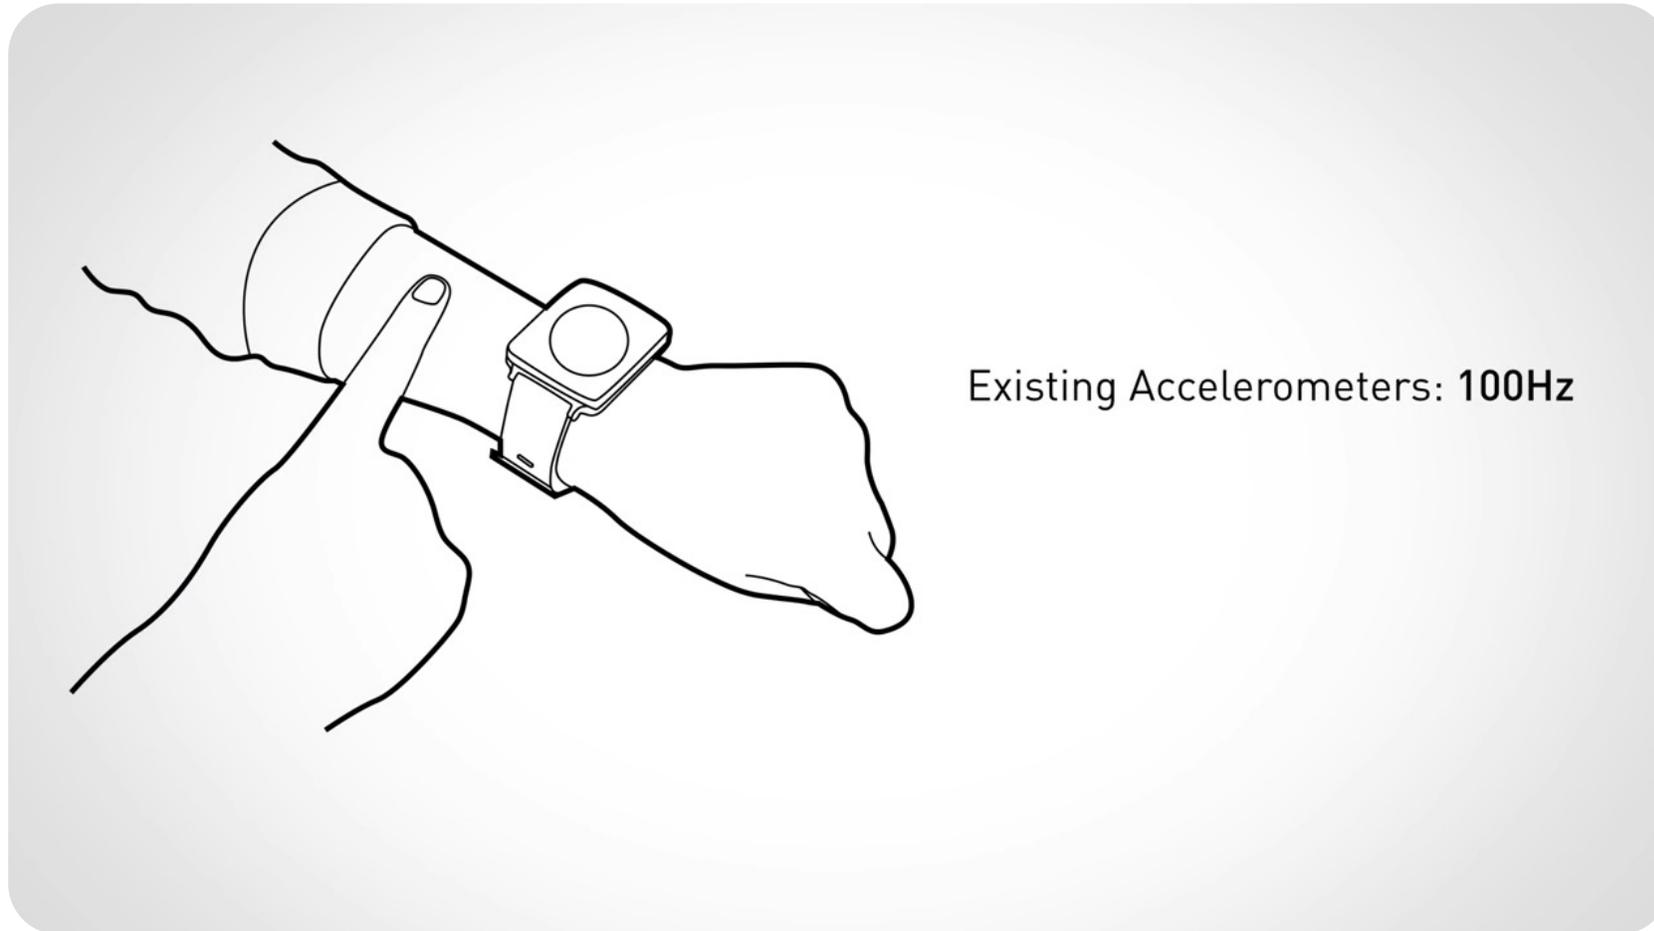


ViBand: High-Fidelity Bio-Acoustic Sensing Using Commodity Smartwatch Accelerometers

Sensing principle

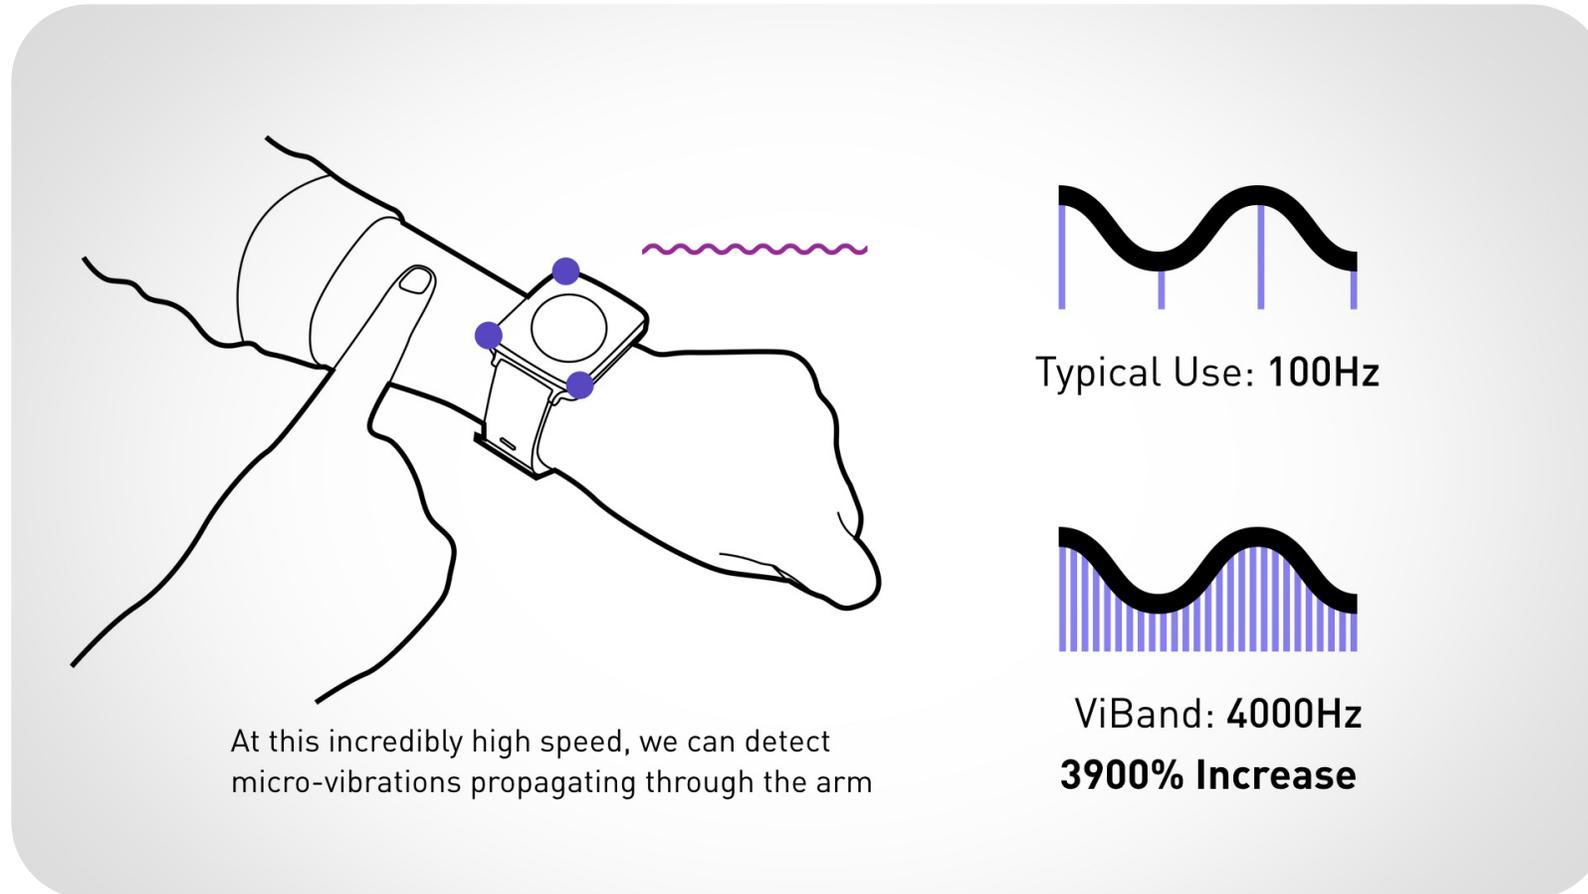

ViBand: High-Fidelity Bio-Acoustic Sensing Using Commodity Smartwatch Accelerometers

Sensing principle


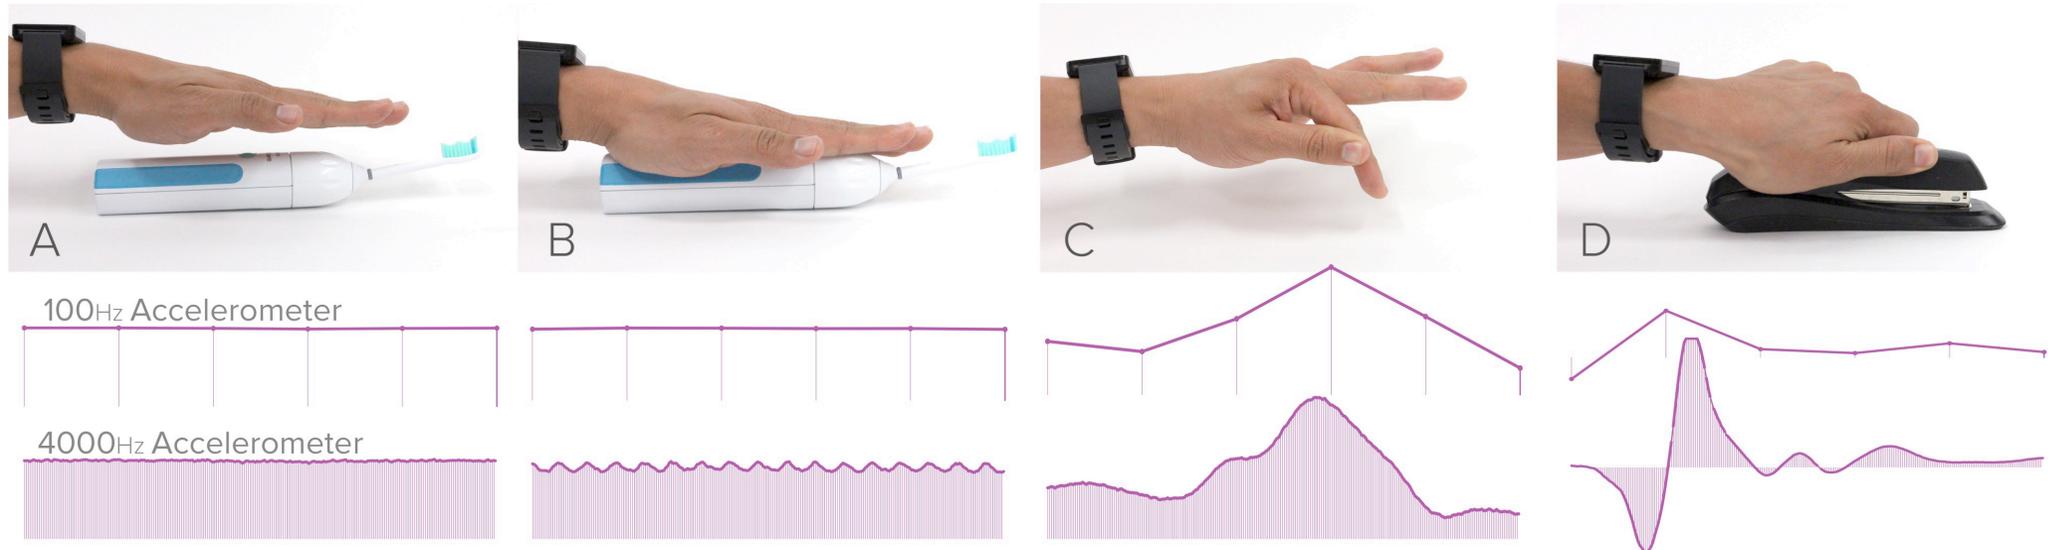


Use the high-speed mode of existing accelerometer

Only need to modify it's kernel – pure software solution!

ViBand: High-Fidelity Bio-Acoustic Sensing Using Commodity Smartwatch Accelerometers

Implementation

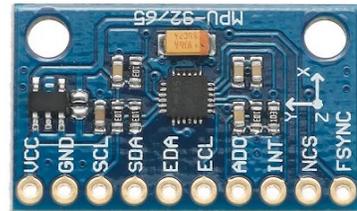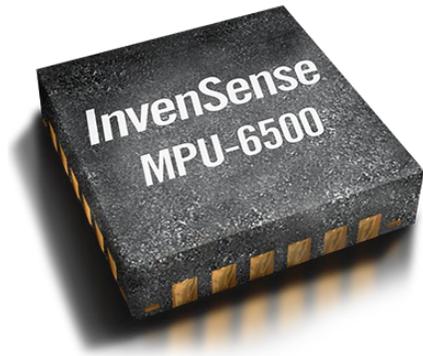

Banggood GY-6500 MPU6500 6DOF 6 Axis Attitude Acceleration Gyroscope Sensor Module SPI Interface



from USA.Banggood

Description MPU 6500 module three axis gyroscope three axis acceleration Module Model GY 6500 Use the chip MPU 6500 Power supply 3 5v internal low voltage regulator ...

See more details at USA.Banggood »

\$3.05


Free shipping. No tax
USA.Banggood

74% positive (11,707)

Visit site

ViBand: High-Fidelity Bio-Acoustic Sensing Using Commodity Smartwatch Accelerometers

Implementation

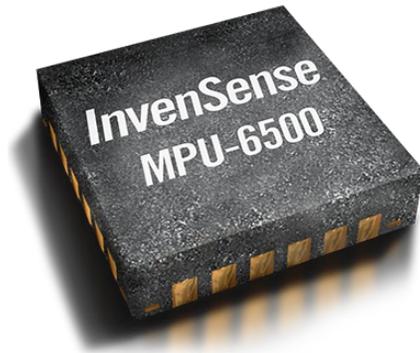

| PARAMETER | CONDITIONS | MIN | TYP | MAX | Units | Notes |
|------------------------------|--|------|-------|------|-------|-------|
| SUPPLY VOLTAGES | | | | | | |
| VDD | | 1.71 | 1.8 | 3.45 | V | 1 |
| VDDIO | | 1.71 | 1.8 | 3.45 | V | 1 |
| SUPPLY CURRENTS | | | | | | |
| Normal Mode | 6-axis | | 3.4 | | mA | 1 |
| | 3-axis Gyroscope | | 3.2 | | mA | 1 |
| | 3-Axis Accelerometer, 4kHz ODR | | 450 | | μA | 1 |
| Accelerometer Low Power Mode | 0.98 Hz update rate | | 7.27 | | μA | 1,2 |
| | 31.25 Hz update rate | | 18.65 | | μA | 1,2 |
| Standby Mode | | | 1.6 | | mA | 1 |
| Full-Chip Sleep Mode | | | 6 | | μA | 1 |
| TEMPERATURE RANGE | | | | | | |
| Specified Temperature Range | Performance parameters are not applicable beyond Specified Temperature Range | -40 | | +85 | °C | 1 |


Table 3: D.C. Electrical Characteristics

Notes:

1. Derived from validation or characterization of parts, not guaranteed in production.
2. Accelerometer Low Power Mode supports the following output data rates (ODRs): 0.24, 0.49, 0.98, 1.95, 3.91, 7.81, 15.63, 31.25, 62.50, 125, 250, 500Hz. Supply current for any update rate can be calculated as:
 - a. Supply Current in μA = 6.9 + Update Rate * 0.376

ViBand: High-Fidelity Bio-Acoustic Sensing Using Commodity Smartwatch Accelerometers

Implementation

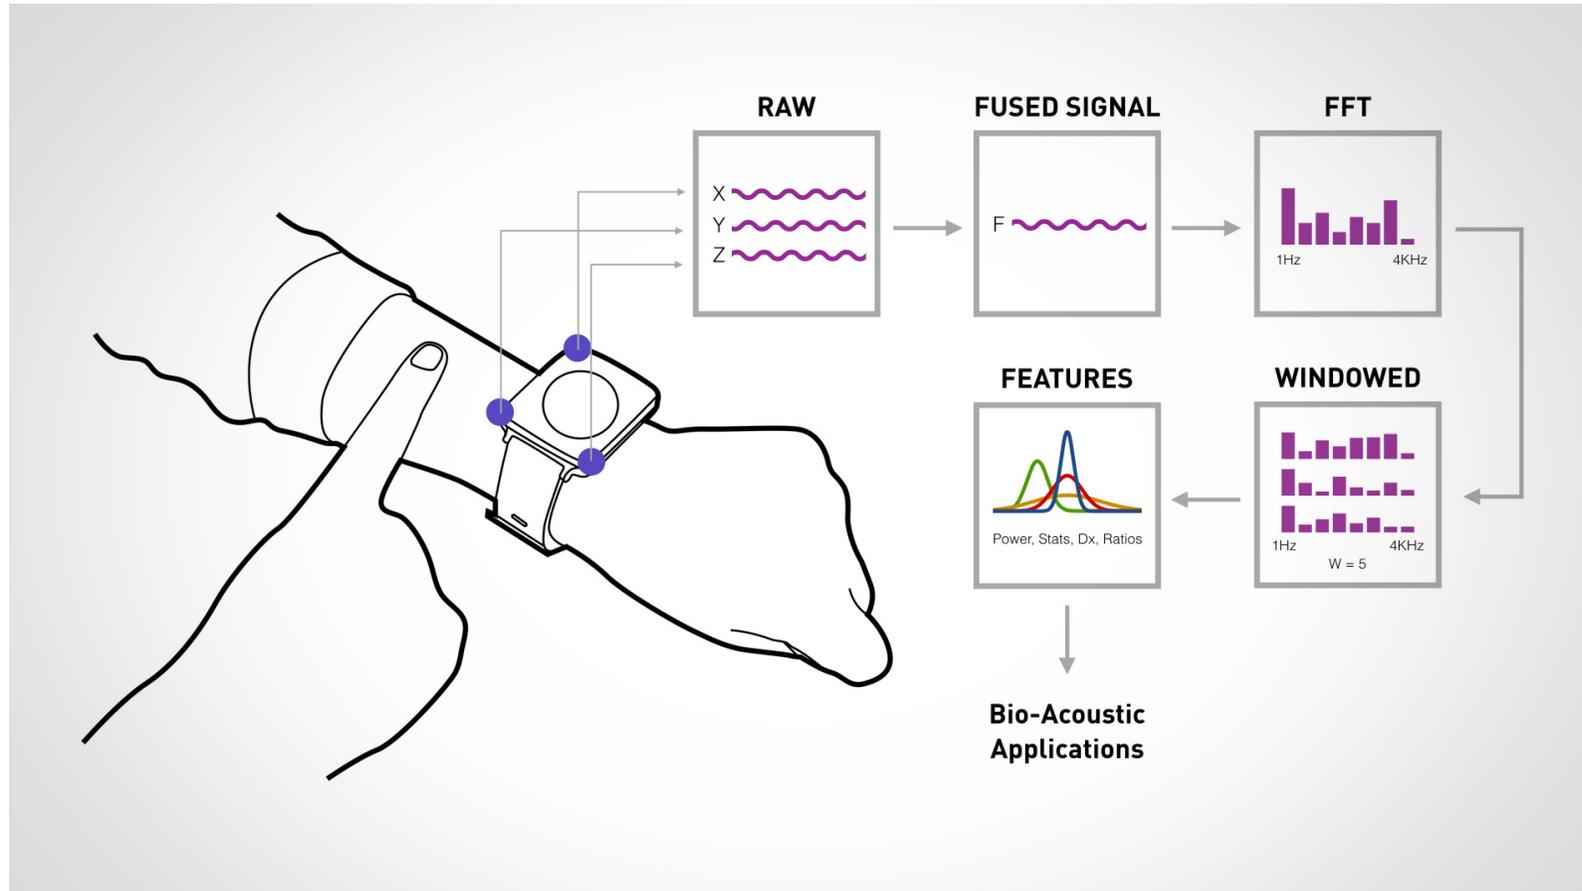

ViBand: High-Fidelity Bio-Acoustic Sensing Using Commodity Smartwatch Accelerometers

Gestures




ViBand: High-Fidelity Bio-Acoustic Sensing Using Commodity Smartwatch Accelerometers

Gestures



ViBand: High-Fidelity Bio-Acoustic Sensing Using Commodity Smartwatch Accelerometers

Object detections

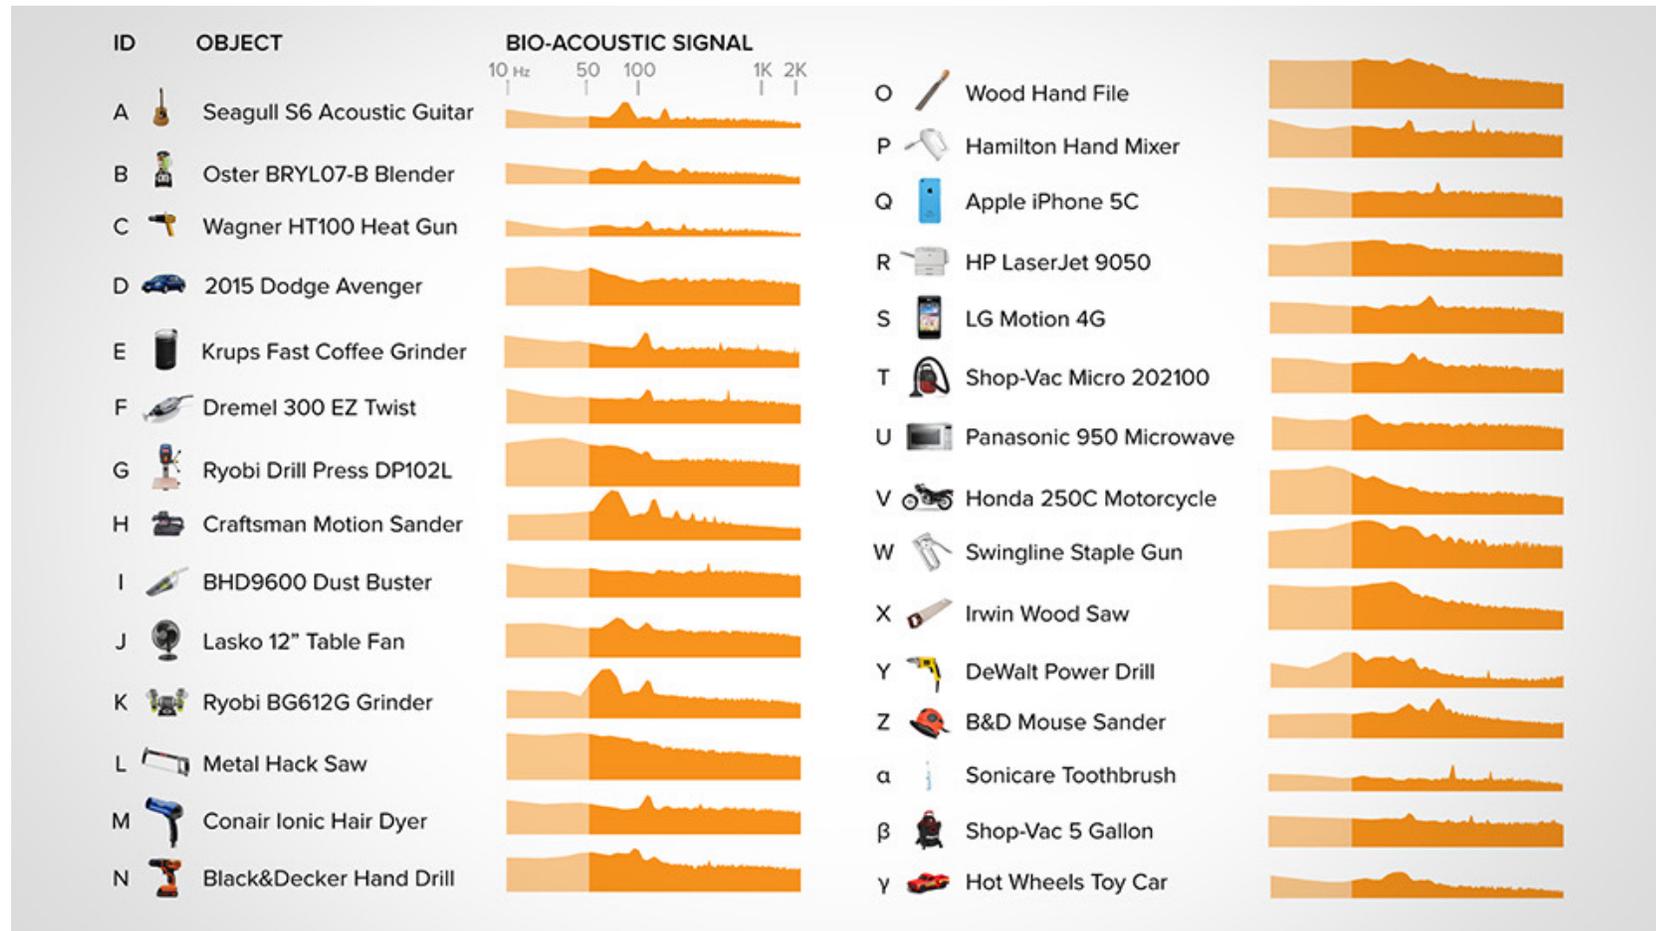

ViBand: High-Fidelity Bio-Acoustic Sensing Using Commodity Smartwatch Accelerometers

Object detections



Input

Output



Input

Output



Cito: An Actuated Smartwatch for Extended Interactions



Online and On-the-go

CHI 2017, May 6–11, 2017, Denver, CO, USA

Cito: An Actuated Smartwatch for Extended Interactions

Jun Gong¹, Lan Li², Daniel Vogel³, Xing-Dong Yang¹

Dartmouth College¹, South China University of Technology², University of Waterloo³
{jun.gong.gr; xing-dong.yang}@dartmouth.edu, lilan.scut@gmail.com, dvogel@uwaterloo.ca



Figure 1. Actuated face movements and usage scenarios: (a) face orbiting for view adaption; (b) face translating outside sleeve; (c) face rotating to indicate an important call; (d) face tilting for sharing; (e) face rising for force feedback.

ABSTRACT

We propose and explore actuating a smartwatch face to enable extended interactions. Five face movements are defined: rotation, hinging, translation, rising, and orbiting. These movements are incorporated into interaction techniques to address limitations of a fixed watch face. A 20-person study uses concept videos of a passive low fidelity prototype to confirm the usefulness of the actuated interaction techniques. A second 20-person study uses 3D rendered animations to access social acceptability and perceived comfort for different actuation dynamics and usage contexts. Finally, we present Cito, a high-fidelity proof-of-concept hardware prototype that investigates technical challenges.

Author Keywords

Actuated UI; Smartwatch; Interaction Techniques

ACM Classification Keywords

H.5.2. Information Interfaces (e.g., HCI): Input devices.

INTRODUCTION

Exploiting the full potential of smartwatches requires useful and usable input and output. This is challenging considering the small form factor and wearable context. Existing research has primarily focused on smartwatch input [7, 12, 14, 16, 19, 21, 29, 37, 46, 57, 65, 72] with little work on output. Smartwatch output has mainly focused on extending the display region such as projecting visual content onto the forearm [45], adding a miniature secondary display on the watch band [4], adding a second watch face [63], or converting the entire watch band into a touchscreen [38]. Haptic output has also been explored, and was found effective in many usage sce-

We propose extending smartwatch output by physically actuating a watch face in five ways: rotating on its normal axis, hinging on side, rising vertically, translating along the forearm, and orbiting around the wristband (Figure 1). These movements can be used for a variety of new interactions. For example, when a user has dirty hands (e.g. gardening), the watch face can *translate* outside of a shirt sleeve to make it visible when a notification arrives. When a user is carrying something heavy, the watch face can *orbit* to a visible part of the watch band. When a user shows a picture on their watch to someone else, the face can *hinge* towards the other person to provide a better viewing angle. If a user needs to receive GPS navigation instructions while they do something else on the watch, the face can physically *rotate* to indicate when to turn a corner. Finally, the watch could *rise* when the phone rings, enabling the user to decline the call eyes-free by pressing the face down like a haptic force-feedback button.

Our focus is on the Human-Computer Interaction aspect of an actuated watch, we iteratively evaluated prototypes of different fidelities presented in different formats. In our first study, we elicit user feedback from 20 participants about actuated watch movements in seven usage scenarios via conceptual videos using a passive prototype. The result confirmed the usefulness of an actuated smartwatch for addressing limitations of a fixed watch face. To further advance our understanding, we conducted another 20-participant study to investigate the social acceptability and comfort of various actuation dynamics when performed in front of different audiences. Forty actuations were presented using 3D animations. The results suggest kinds of movements that should be

CHI 2017

Gong et.al. from Dartmouth

Cito: An Actuated Smartwatch for Extended Interactions



Will this concept be useful?

Generate design space **➡** Create low-fi model **➡** Study before implementation

Cito: An Actuated Smartwatch for Extended Interactions

Exploring the concept feasibility before implementation



Cito: An Actuated Smartwatch for Extended Interactions

Exploring the concept feasibility before implementation

Scenarios:

- Carry heavy obj
- Exposure to dust
- Covered with sleeve
- Gaming with notification
- Missing notification
- Multitasking
- Sharing
- ...



Cito: An Actuated Smartwatch for Extended Interactions

Exploring the concept feasibility before implementation

Scenarios:

Potential solutions
for each of the
scenarios – 7 point
Likert scale rating

T1 (reorienting face)

Cito: An Actuated Smartwatch for Extended Interactions

Exploring the concept feasibility before implementation

Scenarios:

Using videos allowed our study to be highly controlled as participants had to see the same demos.

Potential solutions
for each of the
scenarios – 7 point
Likert scale rating


The videos also encouraged “suspension of disbelief”, allowing them to focus on the Cito concept, rather than implementation details.

Cito: An Actuated Smartwatch for Extended Interactions

Exploring the concept feasibility before implementation


Scenarios:

Potential solutions
for each of the
scenarios – 7 point
Likert scale rating

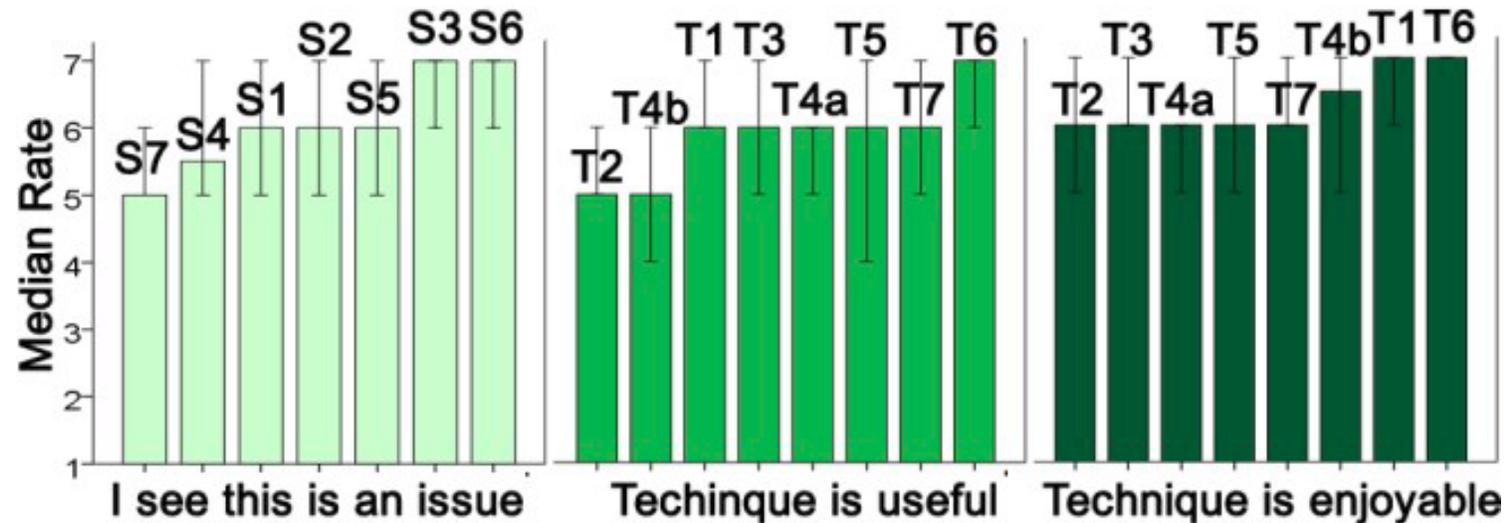

Cito: An Actuated Smartwatch for Extended Interactions


Implementation

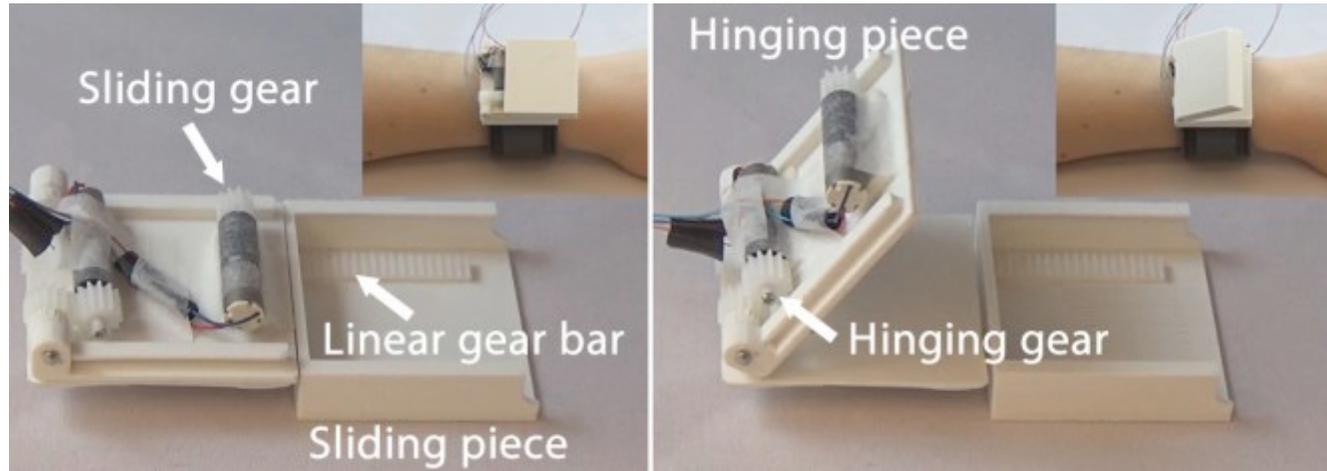

The hinge-translate module

Cito: An Actuated Smartwatch for Extended Interactions

Implementation

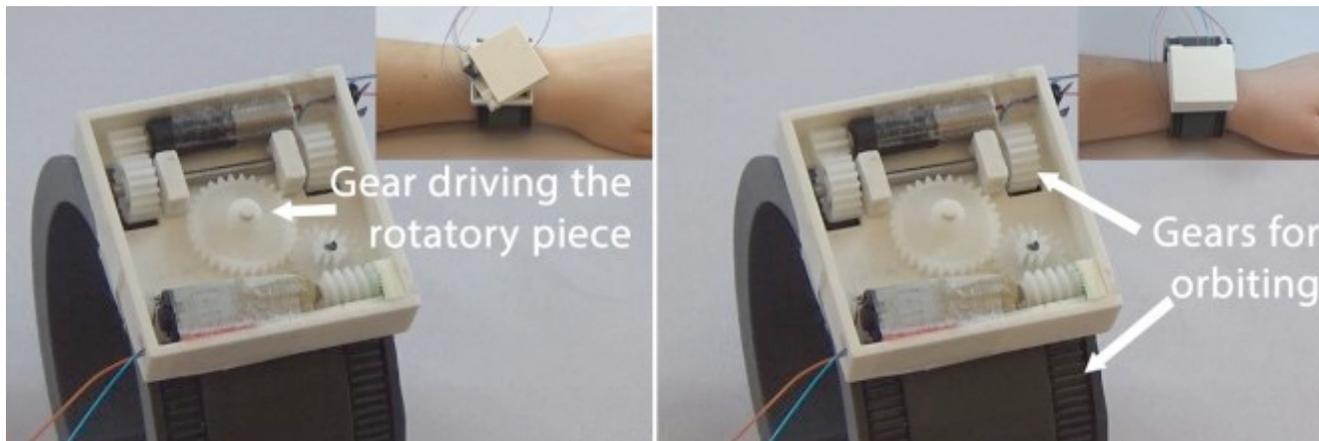

The orbit-rotate module

Cito: An Actuated Smartwatch for Extended Interactions



Plastic Planetary Micro DC Motor with OD: 6mm L:
16.3/18.8/21mm 3VDC / L: 16.3mm / Gear Ratio: 26

from Firgelli Automations

These micro planetary motors are made with plastic gears at low speed and low noiser but high torque comparatively speaking. They are commonly used in medical field. However, ...

[See more details at Firgelli Automations »](#)

\$12.20

+\$14.88 shipping. No tax

[Firgelli Automations](#)

[Visit site](#)



Cito: An Actuated Smartwatch for Extended Interactions



Plastic Gear Package 62 Kinds Of Motor Gear Gearbox Robot Model Accessories Diy



from eBay - 0059627

plastic gear package 62 kinds of motor gear gearbox robot model accessories DIY 0059627
Description: 62 kinds of gear pack: Spindle motor gear: 12 kinds Single gear: 19 kinds ...

[See more details at eBay - 0059627 »](#)

\$4.89

+\$1.60 shipping. No tax

[eBay - 0059627](#)

[Visit site](#)

Cito: An Actuated Smartwatch for Extended Interactions



Fat-finger syndrome

Small screen

One hand operation


Between devices interaction

Anything that a smartwatch
can do but a smartphone
can't?



LumiWatch: On-Arm Projected Graphics and Touch Input

We present the first fully
and self-contained projecti

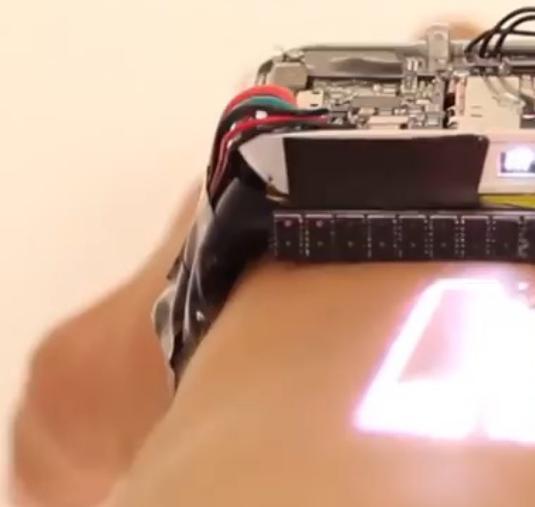

LumiWatch: On-Arm Projected Graphics and Touch Input

Robert Xiao¹ Teng Cao² Ning Guo² Jun Zhuo² Yang Zhang¹ Chris Harrison¹

¹ Carnegie Mellon University
Human-Computer Interaction Institute
5000 Forbes Ave, Pittsburgh, PA 15213
{brx, yang.zhang, chris.harrison}@cs.cmu.edu

² ASU Tech Co. Ltd.
8th Floor, Linyang Tower
6 North 3rd Ring Road Middle, Beijing, China 100011
{bjch001, guoning0067, zhuojun0097}@a-su.com.cn



Figure 1. Our self-contained projection smartwatch (A) provides rectified graphics with touch input on the skin (B). We use a slide-to-unlock mechanism to reject inadvertent touches and provide a rapid projection calibration (C) before apps can be used (D).

ABSTRACT

Compact, worn computers with projected, on-skin touch interfaces have been a long-standing yet elusive goal, largely written off as science fiction. Such devices offer the potential to mitigate the significant human input/output bottleneck inherent in worn devices with small screens. In this work, we present the first, fully-functional and self-contained projection smartwatch implementation, containing the requisite compute, power, projection and touch-sensing capabilities. Our watch offers roughly 40 cm² of interactive surface area – more than five times that of a typical smartwatch display. We demonstrate continuous 2D finger tracking with interactive, rectified graphics, transforming the arm into a touchscreen. We discuss our hardware and software implementation, as well as evaluation results regarding touch accuracy and projection visibility.

Author Keywords

Smartwatch; projection; touch interaction; depth sensing; time-of-flight; on-body interaction.

ACM Classification Keywords

H.5.2. Information interfaces and presentation (e.g. HCI): User interfaces: Input devices and strategies.

INTRODUCTION

Appropriating the human body as an interactive surface is attractive for many reasons. Foremost, skin provides a natural and immediate surface for dynamic, digital projection. Although it introduces some color and physical distortion, the resolution, framerate and overall quality can be high [14, 16, 30, 49]. More importantly, it offers considerable surface area for interactive tasks – many times that of e.g., a smartwatch display. With today's smartwatches containing multi-core, multi-gigahertz CPUs, one could argue their small touchscreens are the chief bottleneck to unlocking richer and more useful applications. Indeed, several widely publicized, *conceptual* on-skin projection watches have been proposed, most notably Cigret [6] and Ritot [37].

A second benefit is that our bodies are always with us, and are often immediately available [39, 45]. This stands in contrast to conventional mobile devices, which typically reside in pockets or bags, and must be retrieved to access even basic functionality [2, 17, 38]. This generally demands a high level of attention, both cognitively and visually, and can be socially disruptive. Further, physically retrieving a device incurs a non-trivial time cost, and can constitute a significant fraction of a simple operation's total time [1].

CHI 2018

Xiao et.al. from CMU


LumiWatch: On-Arm Projected Graphics and Touch Input

Previous “work”



LumiWatch: On-Arm Projected Graphics and Touch Input


System overview

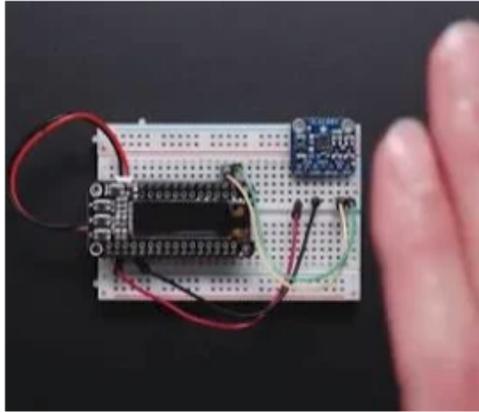

Adafruit VL6180X Time of Flight Distance Ranging Sensor (VL6180)

\$13.95 from Adafruit Industries **89% positive** (4,446)


The **VL6180X** (sometimes called the VL6180) is a Time of Flight distance sensor like no other you've used! The sensor contains a ...

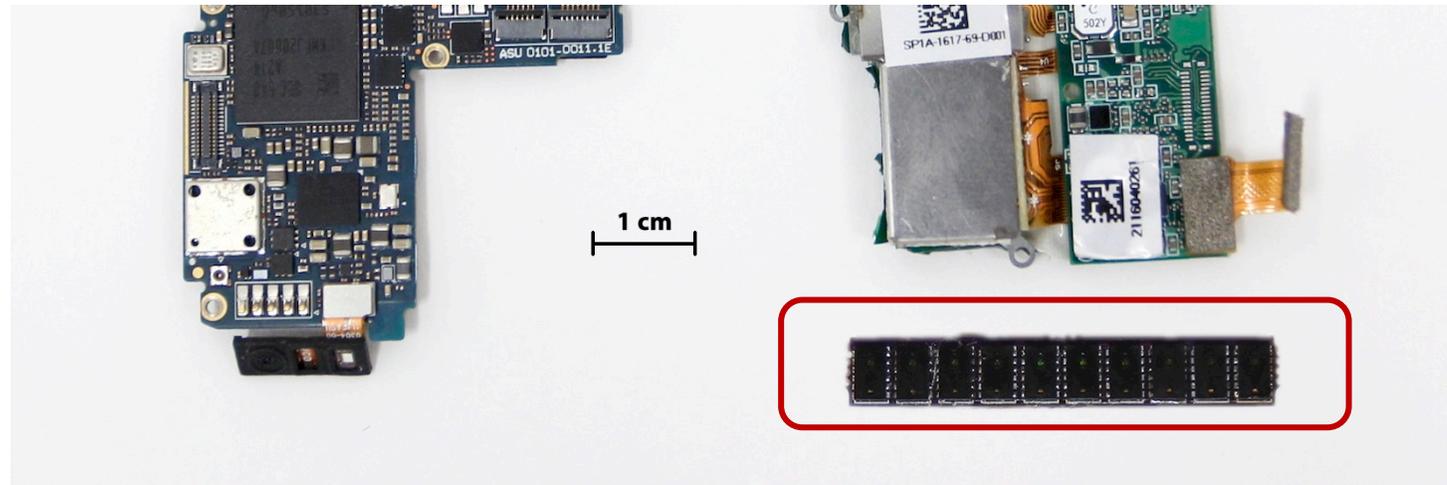

STMicromicro VL6180X ToF sensor

LumiWatch: On-Arm Projected Graphics and Touch Input


System overview

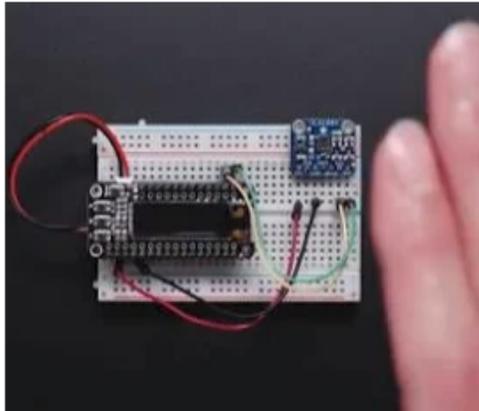

Adafruit VL6180X Time of Flight Distance Ranging Sensor (VL6180)

\$13.95 from Adafruit Industries **89% positive** (4,446)

The **VL6180X** (sometimes called the VL6180) is a Time of Flight distance sensor like no other you've used! The sensor contains a ...

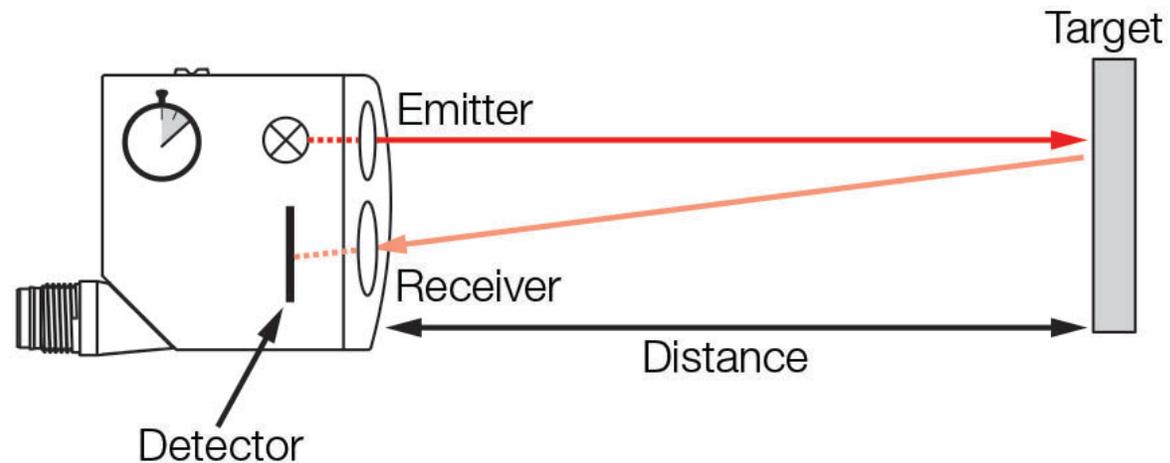


light bounces of nearby objects and reflects back
measure time until the light hits the sensor
closer objects = less time until the light reaches them
far away objects = more time until the light reaches them

Time of Flight Principle (simplified)

LumiWatch: On-Arm Projected Graphics and Touch Input


System overview

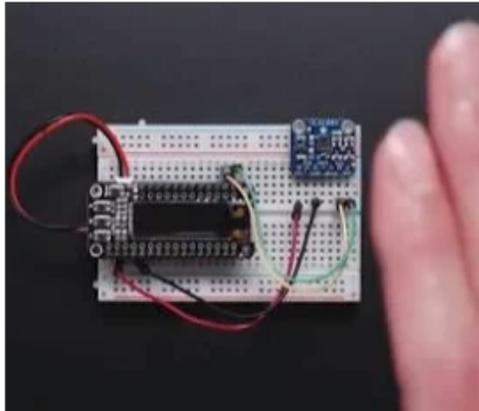

Adafruit VL6180X Time of Flight Distance Ranging Sensor (VL6180)

\$13.95 from Adafruit Industries **89% positive** (4,446)

The **VL6180X** (sometimes called the VL6180) is a Time of Flight distance sensor like no other you've used! The sensor contains a ...

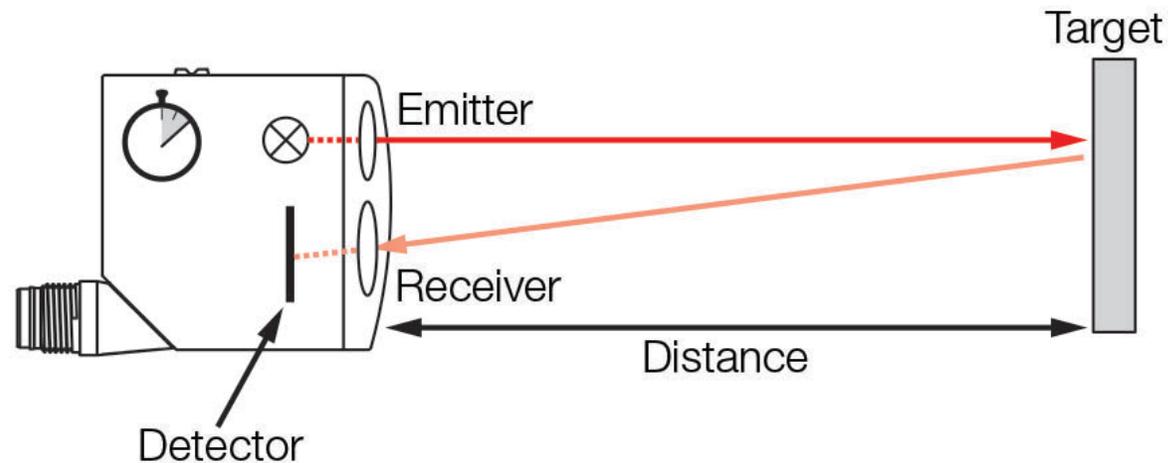

$$d = \frac{c \times \Delta t}{2}$$

Time of Flight Principle (simplified)

LumiWatch: On-Arm Projected Graphics and Touch Input

System overview



Time of Flight Principle (simplified)

LumiWatch: On-Arm Projected Graphics and Touch Input


mini Interactive projector module make any projector interactive for kids

System overview




 mini Interactive projector module make any projector interactive for kids

| | |
|------------------------|---|
| Place of Origin : | China |
| Brand Name : | Hivista |
| Model Number : | IM-300 |
| Certification : | CE,FCC,RoHS |
| focus length : | long focus |
| Function : | make any projectors to interactive |
| Projected size : | 10-150inch |
| Strength : | Small volume,easy to carry,for teaching |
| Interface : | USB port |
| Max users : | 64 person |
| Transmission FPS : | 65~70 frame/sec |
| Positioning accuracy : | 4096*4096 |
| Application : | education and bussiness |
| OEM : | welcome |
| usage : | education in school |
| Price : | 55-88 dollars per pc |
| Packaging Details : | negotiable |
| Delivery Time : | negotiable |
| Payment Terms : | T/T/, Western Union,Paypal |
| Supply Ability : | 3000/month |
| MOQ : | 50 |

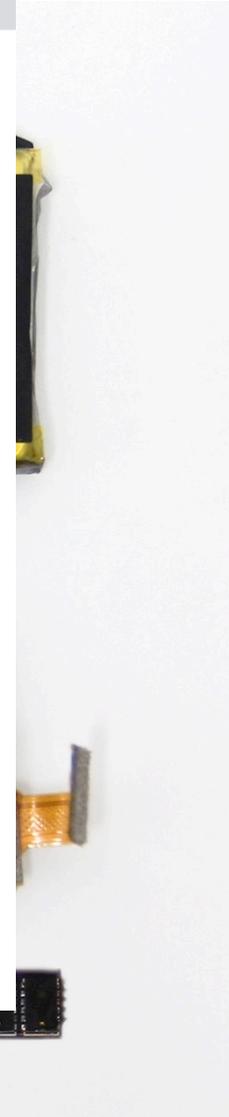

LumiWatch: On-Arm Projected Graphics and Touch Input

System overview

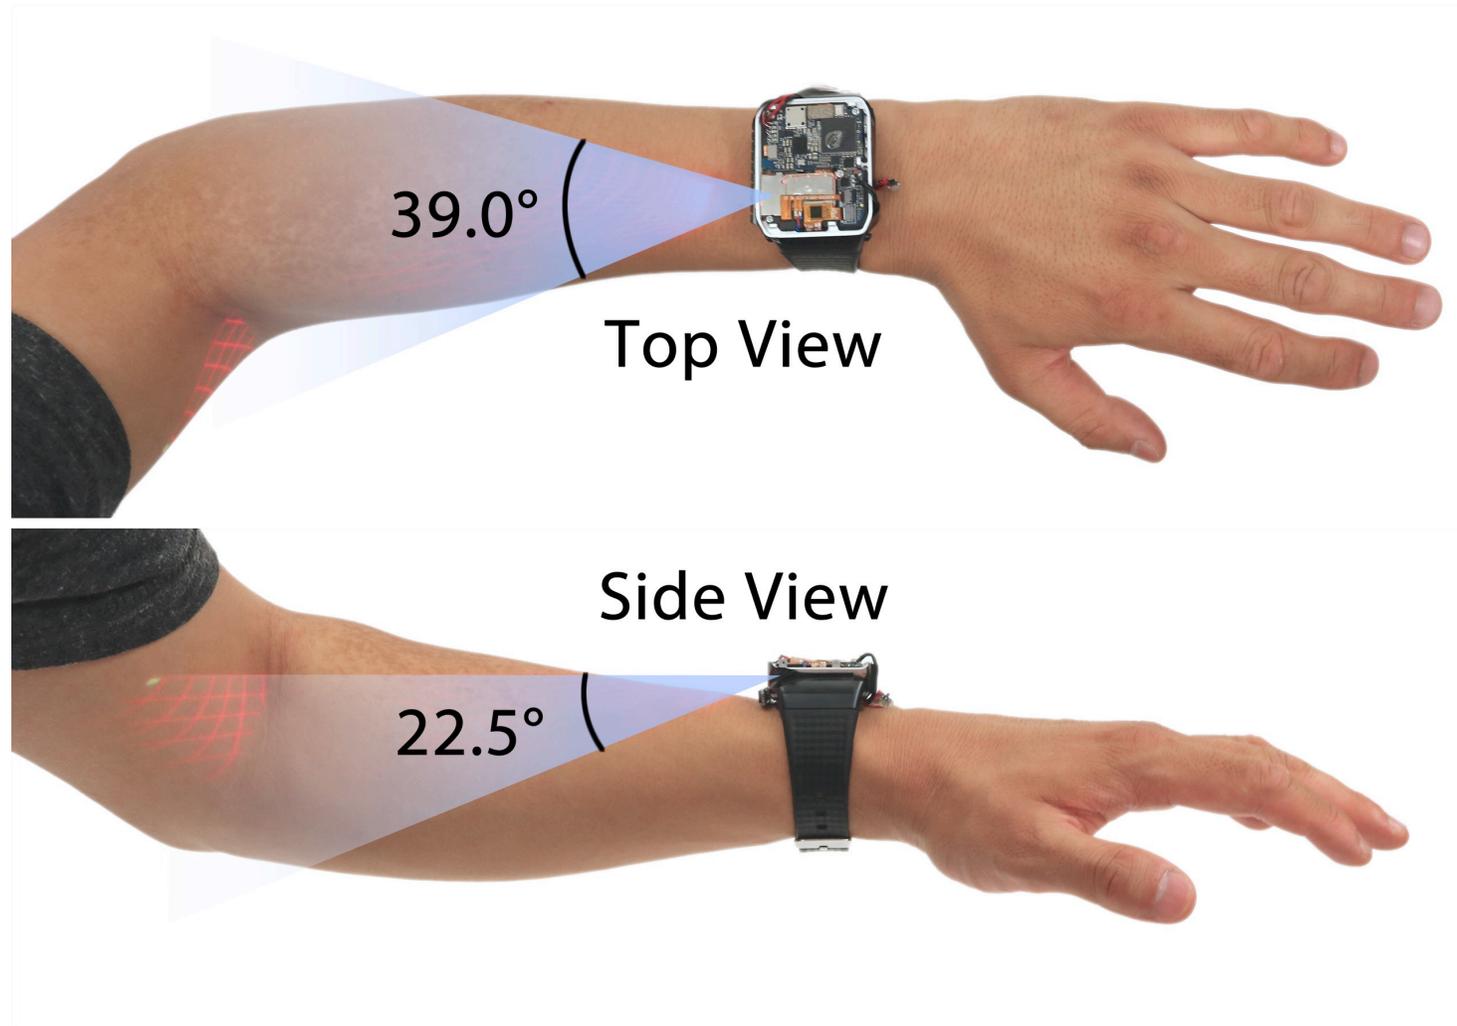

LumiWatch: On-Arm Projected Graphics and Touch Input

Finger tracking



LumiWatch: On-Arm Projected Graphics and Touch Input

We present the first fully functional
and self-contained projection smartwatch



Input

Output



Recap

IR array for 1D sensing

IR ToF for 2D sensing

EM wave for 2D sensing

High frequency Accelerometer for micro-vibration sensing

(all very affordable, and you can try with your Arduino)





Calico: Relocatable On-cloth Wearables with Fast, Reliable, and Precise Locomotion

ANUP SATHYA, University of Maryland, College Park, USA
JIASHENG LI, University of Maryland, College Park, USA
TAUHIDUR RAHMAN, University of California, San Diego, USA
GE GAO, University of Maryland, College Park, USA
HUAISHU PENG, University of Maryland, College Park, USA

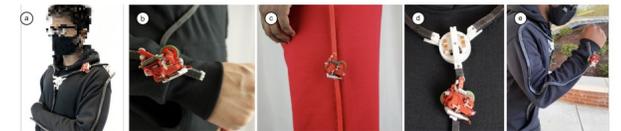


Fig. 1. a) Calico system deployed on a user. b) Calico wearable on the wrist. c) Calico robot moving on the pants. Different colored tracks can be used to blend into clothing. d) Calico moving towards a turntable to switch tracks. e) Running while wearing the Calico system.

We explore Calico, a miniature relocatable wearable system with fast and precise locomotion for on-body interaction, actuation and sensing. Calico consists of a two-wheel robot and an on-cloth track mechanism or “railway”, on which the robot travels. The robot is self-contained, small in size, and has additional sensor expansion options. The track system allows the robot to move along the user’s body and reach any predetermined location. It also includes rotational switches to enable complex routing options when diverging tracks are presented. We report the design and implementation of Calico with a series of technical evaluations for system performance. We then present a few application scenarios, and user studies to understand the potential of Calico as a dance trainer and also explore the qualitative perception of our scenarios to inform future research in this space.

CCS Concepts • **Human-centered computing** → **Ubiquitous and mobile devices: Interaction devices; Mobile computing**

Additional Key Words and Phrases: wearables, ubiquitous computing, kinetic wearables, mobile computing, interactive computing

Authors’ addresses: Anup Sathya, University of Maryland, College Park, Department of Computer Science, USA; Jiasheng Li, University of Maryland, College Park, Department of Computer Science, USA; Tauhidur Rahman, University of California, San Diego, Halcyon Data Science Institute, USA; Ge Gao, University of Maryland, College Park, School of Information Studies, USA; Huaishu Peng, University of Maryland, College Park, Department of Computer Science, USA.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

© 2022 Association for Computing Machinery.
2474-9567/2022/9-ART136 \$15.00
<https://doi.org/10.1145/3550323>

Proc. ACM Interact. Mob. Wearable Ubiquitous Technol., Vol. 6, No. 3, Article 136. Publication date: September 2022.

IMWUT 22

Sathya et.al.

Duet: Exploring Joint Interactions on a Smart Phone and a Smart Watch

Xiang 'Anthony' Chen^{1,2}, Tovi Grossman¹, Daniel Wigdor³, George Fitzmaurice¹

¹User Interface Group
Autodesk Research

²HCI Institute
Carnegie Mellon University

³Department of Computer Science
University of Toronto

{firstname.lastname}@autodesk.com

xiangchen@acm.org

dwigdor@dgp.toronto.edu



Figure 1. A duet of interaction between a handheld and a wrist worn device (a): the watch is used as a tool palette when annotating text on the phone (b); a simultaneous pinch-to-close swipe gesture on both devices mutes their notifications (c); the watch's orientation indicates which hand part causes a touch, thus enabling a seamless transition between modes: for example, writing with the pad of the finger (d), scrolling with side of the finger (e), and text selection with the knuckle (f).

ABSTRACT

The emergence of smart devices (e.g., smart watches and smart eyewear) is redefining mobile interaction from the solo performance of a smart phone, to a symphony of multiple devices. In this paper, we present Duet – an interactive system that explores a design space of interactions between a smart phone and a smart watch. Based on the devices' spatial configurations, Duet coordinates their motion and touch input, and extends their visual and tactile output to one another. This transforms the watch into an active element that enhances a wide range of phone-based interactive tasks, and enables a new class of multi-device gestures and sensing techniques. A technical evaluation shows the accuracy of these gestures and sensing techniques, and a subjective study on Duet provides insights, observations, and guidance for future work.

INTRODUCTION

Interactive computing technology is becoming increasingly ubiquitous. Advances in processing, sensing, and displays have enabled devices that fit into our palms and pockets (e.g., [2, 15]), that are wrist-worn [27, 40] or head-mounted [20, 29], or that are embedded as smart clothing [28, 37]. Commercialization is rapidly catching up with the research community's vision of mobile and ubiquitous form factors: smart phones, smart watches, and smart eyewear are all available for purchase. Soon, many of us may carry not one smart device, but two, three, or even more on a daily basis.

For interaction designers, this introduces a new opportunity to leverage the availability of these devices to create new interactions beyond the usage of a single device alone. At present, the space of interaction techniques making use of this opportunity is underexplored, primarily focusing on

BeamBand: Hand Gesture Sensing with Ultrasonic Beamforming

Yasha Iravantchi Mayank Goel Chris Harrison
Carnegie Mellon University, Human-Computer Interaction Institute
5000 Forbes Avenue, Pittsburgh, PA 15213
{ysi, mayank, chris.harrison}@cs.cmu.edu

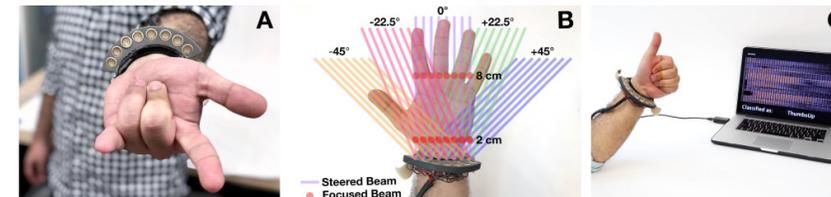


Figure 1. BeamBand is a wrist worn sensor containing eight transducers (A) that uses beamforming to direct and focus ultrasound at areas of interest (B) in order to recognize a variety of hand gestures (C).

ABSTRACT

BeamBand is a wrist-worn system that uses ultrasonic beamforming for hand gesture sensing. Using an array of small transducers, arranged on the wrist, we can ensemble acoustic wavefronts to project acoustic energy at specified angles and focal lengths. This allows us to interrogate the surface geometry of the hand with inaudible sound in a raster-scan-like manner, from multiple viewpoints. We use the resulting, characteristic reflections to recognize hand pose at 8 FPS. In our user study, we found that BeamBand supports a six-class hand gesture set at 94.6% accuracy. Even across sessions, when the sensor is removed and reworn later, accuracy remains high: 89.4%. We describe our software and hardware, and future avenues for integration into devices such as smartwatches and VR controllers.

CCS CONCEPTS

Human-centered computing → Human computer interaction (HCI) → Interaction techniques → Gestural input

KEYWORDS

Hand Input; Hand Gesture; Acoustic Reflectometry; Acoustic Beamforming; Acoustic; Interaction Techniques; Wearables

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

CHI 2019, May 4–9, 2019, Glasgow, Scotland, UK
© 2019 Copyright is held by the owner/author(s). Publication rights licensed to ACM. ACM ISBN 978-1-4503-5970-2/19/05...\$15.00.
DOI: <https://doi.org/10.1145/3290605.3300245>

1 INTRODUCTION

Robust hand gesture detection holds the promise to enrich user interfaces and improve immersiveness, whether it be smartwatches to AR/VR systems. Unfortunately, identifying hand gestures without instrumenting the hand (e.g., gloves, controllers) has proven to be challenging, which motivates the need to identify new methods. Prior research includes leveraging electromyography [38][39], bio-acoustics [23][15], electrical impedance tomography [50][51], contour sensing [7], and worn cameras [20]. While each approach has its strengths and drawbacks, a common weakness is robust accuracy across users and worn sessions.

In this paper, we present our work on BeamBand, a new approach for worn hand gesture sensing, which leverages acoustic beamforming. We use small in-air ultrasonic transducers arranged along the contour of the wrist (Figure 1A), which offers a stable vantage point from which to capture hand pose. Using active beamforming, we steer and focus ultrasound towards areas of interest on the hand (Figure 1B). We also multiplex our transducers, capturing beamformed reflections from slightly different viewpoints (Figure 1B), offering rich signals for machine-learning-driven hand gesture recognition (Figure 1C).

To assess BeamBand's recognition performance, we conducted a ten-participant study, adopting two gesture sets from the literature in order to enable direct comparison (i.e., rather than developing a custom set). The first set contained seven hand poses, while the second set has six gestures along three axes of rotation. On these two gesture sets, BeamBand demonstrates accuracies of 92.5% and 94.6%

CHI 2014
chen et.al. from CMU & Autodesk

CHI 2019
Iravantchi et.al.